

# MOS FET Relays

# G3VM-41LR11

**SSOP Package MOS FET Relay with Low Output Capacitance and ON Resistance ( $C \times R = 4.9 \text{ pF}\cdot\Omega$ ) in a 40-V Load Voltage Model.**

- ON resistance of  $7 \Omega$  (typical) suppresses output signal attenuation.
- Leakage current of  $0.2 \text{ nA}$  max. ( $10 \text{ pA}$  typ.) when relay is open
- Turn-on time =  $0.026 \text{ ms}$  (typ.), Turn-off time =  $0.045 \text{ ms}$  (typ.)
- RoHS compliant



**NEW**

## ■ Application Examples

- Semiconductor inspection tools
- Measurement devices and Data loggers
- Broadband systems

**Note:** The actual product is marked differently from the image shown here.


## ■ List of Models

| Contact form | Terminals                  | Load voltage (peak value) | Model           | Number per tape |
|--------------|----------------------------|---------------------------|-----------------|-----------------|
| SPST-NO      | Surface-mounting terminals | 40 VAC                    | G3VM-41LR11     | ---             |
|              |                            |                           | G3VM-41LR11(TR) | 1,500           |

## ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

G3VM-41LR11

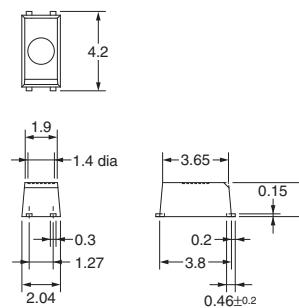


**Note:** A tolerance of  $\pm 0.1 \text{ mm}$  applies to all dimensions unless otherwise specified.

Weight: 0.03 g

**Note:** The actual product is marked differently from the image shown here.


## ■ Terminal Arrangement/Internal Connections (Top View)

G3VM-41LR11



## ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-41LR11



## ■ Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


| Item   | Symbol                             | Rating                    | Unit      | Measurement Conditions        |
|--|------------------------------------|---------------------------|-----------|-------------------------------|
| Input  | LED forward current                | $I_F$                     | 30        | mA                            |
|  | LED forward current reduction rate | $\Delta I_F/\text{°C}$    | -0.3      | mA/°C                         |
|  | LED reverse voltage                | $V_R$                     | 5         | V                             |
|  | Connection temperature             | $T_j$                     | 125       | °C                            |
| Output   | Load voltage (AC peak/DC)          | $V_{OFF}$                 | 40        | V                             |
|  | Continuous load current            | $I_O$                     | 140       | mA                            |
|  | ON current reduction rate          | $\Delta I_{ON}/\text{°C}$ | -1.4      | mA/°C                         |
|  | Connection temperature             | $T_j$                     | 125       | °C                            |
| Dielectric strength between input and output (See note 1.) | $V_{I-O}$                          | 1,500                     | $V_{rms}$ | AC for 1 min                  |
| Ambient operating temperature                              | $T_a$                              | -20 to +85                | °C        | With no icing or condensation |
| Storage temperature  | $T_{stg}$                          | -40 to +125               | °C        | With no icing or condensation |
| Soldering temperature                                      | ---                                | 260                       | °C        | 10 s                          |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

| Item  | Symbol                                 | Minimum    | Typical | Maximum | Unit       | Measurement conditions  |
|---|--|------------|---------|---------|------------|---|
| Input                                       | LED forward voltage                    | $V_F$      | 1.15    | 1.30    | 1.45       | V   |
|   | Reverse current                        | $I_R$      | ---     | ---     | 10         | $\mu\text{A}$   |
|   | Capacity between terminals             | $C_T$      | ---     | 70      | ---        | pF  |
|   | Trigger LED forward current            | $I_{FT}$   | ---     | ---     | 3          | mA  |
| Output                                      | Maximum resistance with output ON      | $R_{ON}$   | ---     | 7       | 10         | $\Omega$  |
|   | Current leakage when the relay is open | $I_{LEAK}$ | ---     | 10      | 200        | pA  |
|   | Capacity between terminals             | $C_{OFF}$  | ---     | 0.7     | 1.3        | pF  |
| Capacity between I/O terminals              | $C_{I-O}$                              | ---        | 0.3     | ---     | pF         | $f = 1 \text{ MHz}, V_s = 0 \text{ V}$                                      |
| Insulation resistance between I/O terminals | $R_{I-O}$                              | 1,000      | ---     | ---     | M $\Omega$ | $V_{I-O} = 500 \text{ VDC}, R_{I-O} \leq 60\%$                              |
| Turn-ON time                                | $t_{ON}$                               | ---        | 0.026   | 0.2     | ms         | $I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 10 \text{ V}$ (See note 2.) |
| Turn-OFF time                               | $t_{OFF}$                              | ---        | 0.045   | 0.2     | ms         |   |

Note: 2. Turn-ON and Turn-OFF Times

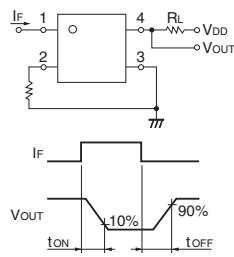


## ■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

| Item                                 | Symbol   | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC)            | $V_{DD}$ | ---     | ---     | 32      | V    |
| Operating LED forward current        | $I_F$    | ---     | ---     | 20      | mA   |
| Continuous load current (AC peak/DC) | $I_O$    | ---     | ---     | 140     | mA   |
| Operating temperature                | $T_a$    | 25      | ---     | 60      | °C   |

## ■ Engineering Data

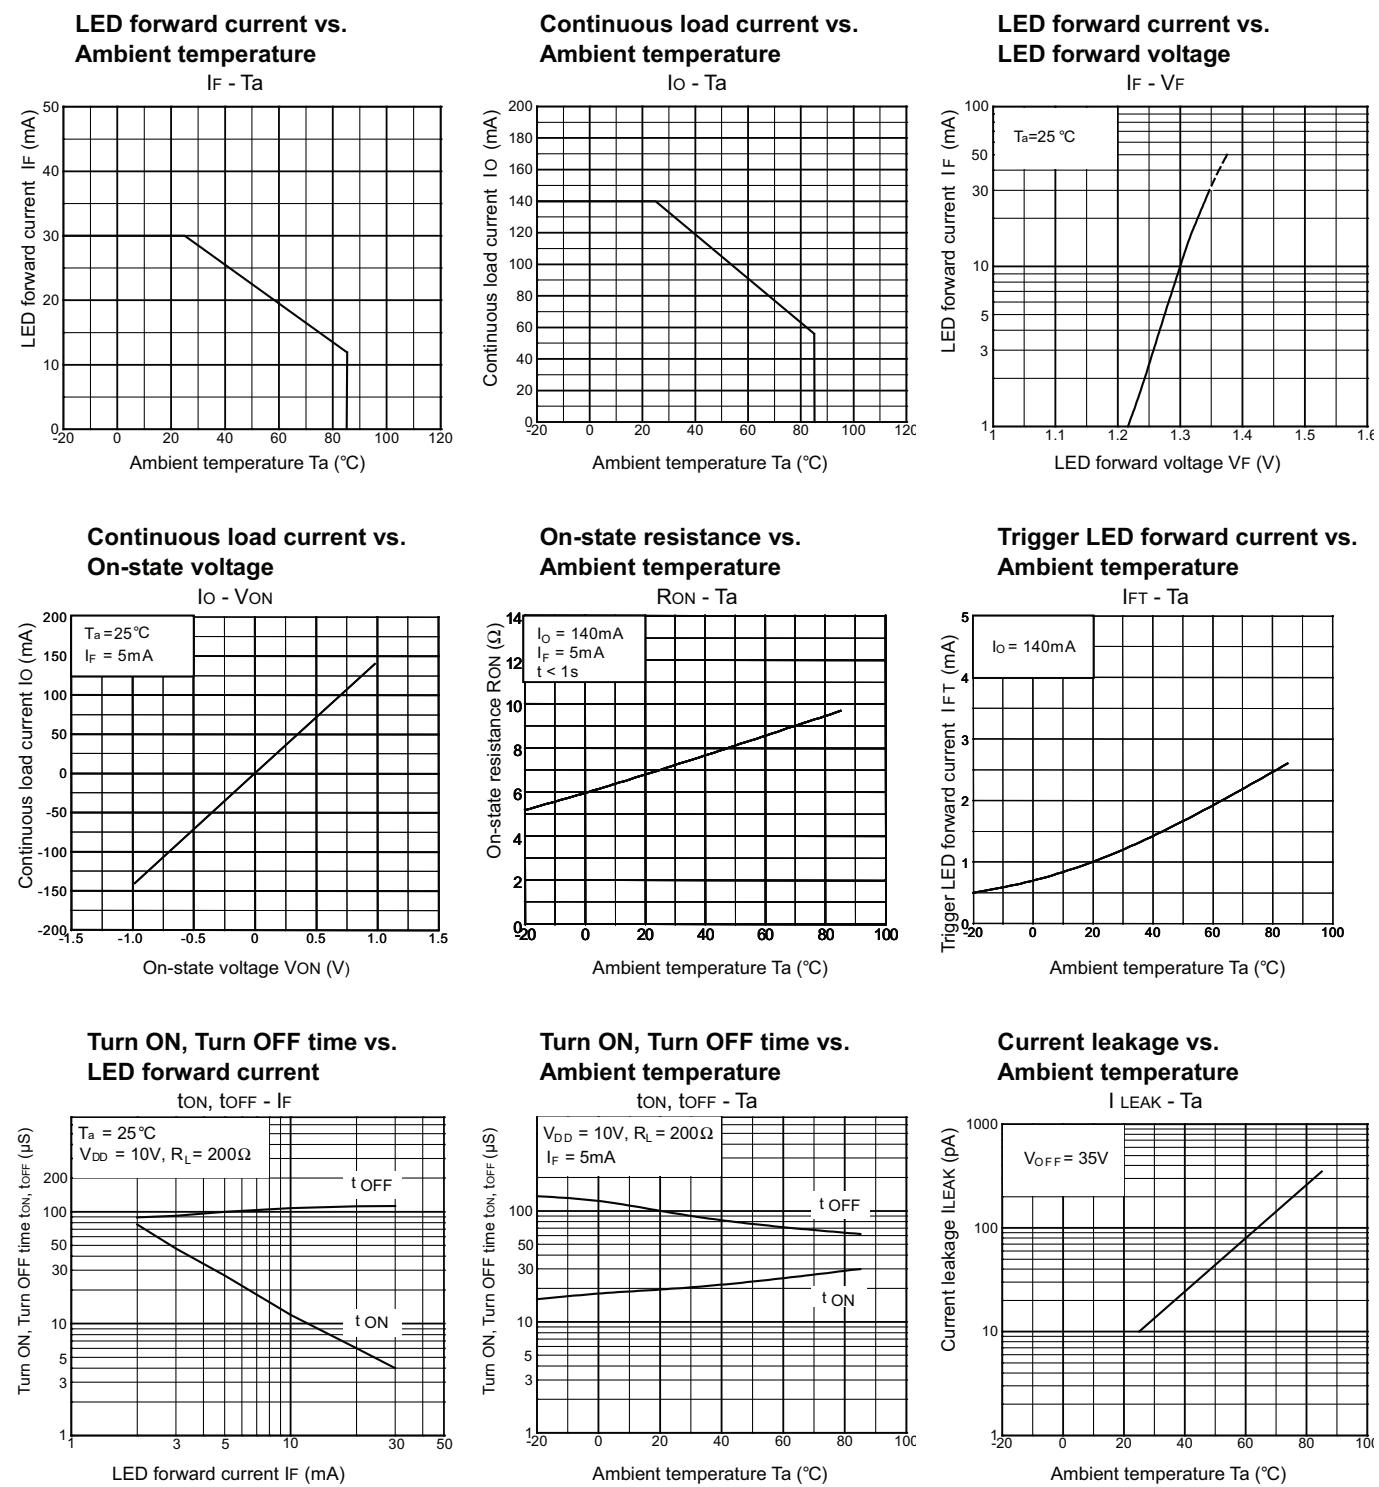

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC  
COMPONENTS LLC**  
55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

**OMRON ON-LINE**

Global - <http://www.omron.com>  
USA - <http://www.components.omron.com>

Printed in USA