

T-1 (3 mm) Diffused LED Lamps

Technical Data

HLMP-130X Series
HLMP-1385
HLMP-140X Series
HLMP-1485
HLMP-1503
HLMP-1523
HLMP-1585
HLMP-K40X Series
HLMP-K600

Features

- High Intensity
- Choice of 4 Bright Colors
High Efficiency Red
Orange
Yellow
High Performance Green
- Popular T-1 Diameter Package
- Selected Minimum Intensities
- Wide Viewing Angle
- General Purpose Leads


- Reliable and Rugged
- Available on Tape and Reel

Description

This family of T-1 lamps is widely used in general purpose indicator applications. Diffusants, tints, and optical design are balanced to yield superior light output and wide viewing angles. Several intensity choices are available in each color for increased design flexibility.



Package Dimensions

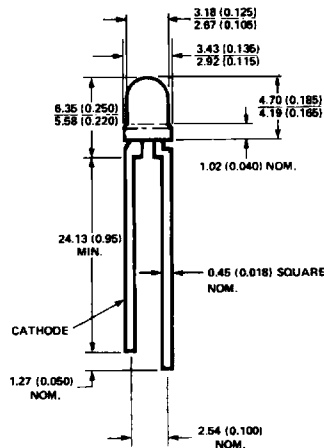

NOTES
 1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES)
 2. AN EPOXY MENISCUS MAY EXTEND ABOUT 1mm (0.040") DOWN THE LEADS.

| Part Number HLMP- | Application | Minimum Intensity (mcd) at 10 mA | Color (Material) |
|----------------------|-----------------|-------------------------------------|---------------------------------------|
| 1300 | General Purpose | 1.3 | High Efficiency Red (GaAsP on GaP) |
| 1301 | General Purpose | 2.1 | |
| 1302 | High Ambient | 3.4 | |
| 1385 | Premium Lamp | 8.6 | Orange (GaAsP on GaP) |
| K400 | General Purpose | 1.3 | |
| K401 | High Ambient | 2.1 | |
| K402 | Premium Lamp | 3.4 | Yellow (GaAsP on GaP) |
| 1400 | General Purpose | 1.4 | |
| 1401 | General Purpose | 2.2 | |
| 1402 | High Ambient | 3.6 | Green (GaP) |
| 1485 | Premium Lamp | 5.7 | |
| 1503 | General Purpose | 1.0 | |
| 1523 | High Ambient | 2.6 | Emerald Green (GaP) |
| 1585 | Premium Lamp | 4.2 | |
| K600 ⁽¹⁾ | General Purpose | 1.0 | |

Note:

1. Please refer to Application Note 1061 for information comparing standard green and emerald green light output degradation.

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter | HER/Orange | Yellow | Green | Units |
|--|------------------------------------|-------------|-------------|------------------|
| Peak Forward Current | 90 | 60 | 90 | mA |
| Average Forward Current ^[1] | 25 | 20 | 25 | mA |
| DC Current ^[2] | 30 | 20 | 30 | mA |
| Reverse Voltage ($I_R = 100 \mu\text{A}$) | 5 | 5 | 5 | V |
| Transient Forward Current ^[4] (10 μsec Pulse) | 500 | 500 | 500 | mA |
| LED Junction Temperature | 110 | 110 | 110 | $^\circ\text{C}$ |
| Operating Temperature Range | -55 to +100 | -55 to +100 | -20 to +100 | $^\circ\text{C}$ |
| Storage Temperature Range | | | -55 to +100 | |
| Lead Soldering Temperature [1.6 mm (0.063 in.) from body] | 260 $^\circ\text{C}$ for 5 seconds | | | |

Notes:

- See Figure 5 (HER/Orange), 10 (Yellow), or 15 (Green/Emerald Green) to establish pulsed operating conditions.
- For Red, Orange, and Green series derate linearly from 50 $^\circ\text{C}$ at 0.5 mA/ $^\circ\text{C}$. For Yellow series derate linearly from 50 $^\circ\text{C}$ at 0.2 mA/ $^\circ\text{C}$.
- For Red, Orange, and Green series derate power linearly from 25 $^\circ\text{C}$ at 1.8 mW/ $^\circ\text{C}$. For Yellow series derate power linearly from 50 $^\circ\text{C}$ at 1.6 mW/ $^\circ\text{C}$.
- The transient peak current is the maximum non-recurring peak current that can be applied to the device without damaging the LED die and wirebond. It is not recommended that the device be operated at peak currents beyond the peak forward current listed in the Absolute Maximum Ratings.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Symbol | Description | Device HLMP- | Min. | Typ. | Max. | Units | Test Conditions | |
|---------------|--------------------|---------------------|------|------|------|-------|-----------------------|--|
| I_V | Luminous Intensity | High Efficiency Red | | | | mcd | $I_F = 10 \text{ mA}$ | |
| | | 1300 | 1.3 | 5.0 | | | | |
| | | 1301 | 2.1 | 5.5 | | | | |
| | | 1302 | 3.4 | 7.0 | | | | |
| | | 1385 | 8.6 | 11.0 | | | | |
| | | Orange | | | | | | |
| | | K400 | 1.3 | 5.0 | | | | |
| | | K401 | 2.1 | 5.5 | | | | |
| | | K402 | 3.4 | 7.0 | | | | |
| | | Yellow | | | | | | |
| | | 1400 | 1.4 | 5.0 | | | | |
| | | 1401 | 2.2 | 6.0 | | | | |
| | | 1402 | 3.6 | 7.0 | | | | |
| | | 1485 | 5.7 | 10.0 | | | | |
| | | Green | | | | | | |
| | | 1503 | 1.0 | 5.0 | | | | |
| | | 1523 | 2.6 | 7.0 | | | | |
| | | 1585 | 4.2 | 8.5 | | | | |
| Emerald Green | | | | | | | | |
| K600 | 1.0 | 4.5 | | | | | | |

Electrical Characteristics at $T_A = 25^\circ\text{C}$ (cont.)

| Symbol | Description | Device HLMP- | Min. | Typ. | Max. | Units | Test Conditions |
|-------------------------|---|---|-------------------|---------------------------------|--------------------------|-------------------------------------|------------------------------------|
| $2\theta^{1/2}$ | Included Angle Between Half Luminous Intensity Points | All | | 60 | | Deg. | $I_F = 10\text{ mA}$ See Note 1 |
| λ_{PEAK} | Peak Wavelength | High Efficiency Red Orange Yellow Green Emerald Green | | 635 600 583 565 558 | | nm | Measurement at Peak |
| λ_d | Dominant Wavelength | High Efficiency Red Orange Yellow Green Emerald Green | | 626 602 585 569 560 | | nm | See Note 2 |
| $\Delta\lambda_{1/2}$ | Spectral Line Halfwidth | High Efficiency Red Yellow Green Emerald Green | | 40 36 28 24 | | nm | |
| τ_s | Speed of Response | High Efficiency Red Orange Yellow Green Emerald Green | | 90 280 90 500 3100 | | ns | |
| C | Capacitance | High Efficiency Red Orange Yellow Green Emerald Green | | 11 4 15 18 35 | | pF | $V_F = 0;$ $f = 1\text{ MHz}$ |
| $R\theta_{J-PIN}$ | Thermal Resistance | All | | 290 | | $^\circ\text{C/W}$ | Junction to Cathode Lead |
| V_F | Forward Voltage | HER/Orange Yellow Green Emerald Green | 1.5 1.5 1.5 | 1.9 2.0 2.1 2.1 | 2.4 2.4 2.7 2.7 | V | $I_F = 10\text{ mA}$ |
| V_R | Reverse Breakdown Voltage | All | 5.0 | | | V | $I_R = 100\ \mu\text{A}$ |
| η_v | Luminous Efficacy | High Efficiency Red Orange Yellow Green Emerald Green | | 145 380 500 595 655 | | $\frac{\text{lumens}}{\text{Watt}}$ | See Note 3 |

Notes:

- $\theta^{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- Radiant intensity, I_e , in watts/steradian, may be found from the equation $I_e = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

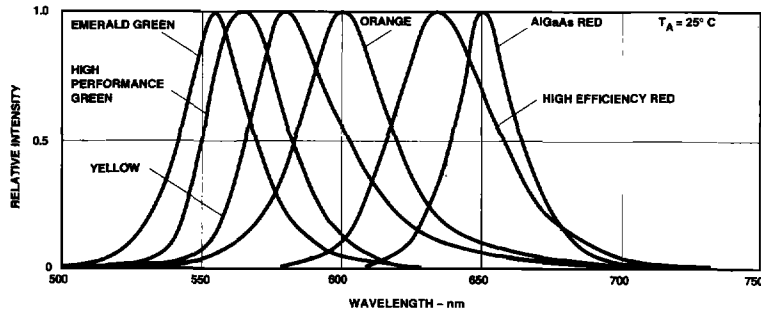


Figure 1. Relative Intensity vs. Wavelength.

T-1 High Efficiency Red, Orange Diffused Lamps




Figure 2. Forward Current vs. Forward Voltage Characteristics.




Figure 3. Relative Luminous Intensity vs. DC Forward Current.




Figure 4. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak LED Current.




Figure 5. Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX Ratings).

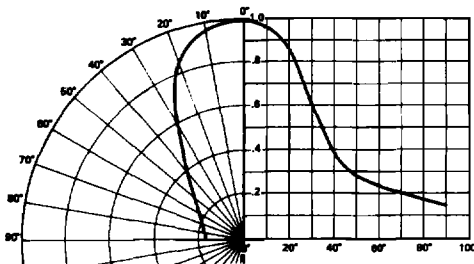


Figure 6. Relative Luminous Intensity vs. Angular Displacement.

T-1 Yellow Diffused Lamps




Figure 7. Forward Current vs. Forward Voltage Characteristics.




Figure 8. Relative Luminous Intensity vs. Forward Current.




Figure 9. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.




Figure 10. Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX Ratings).

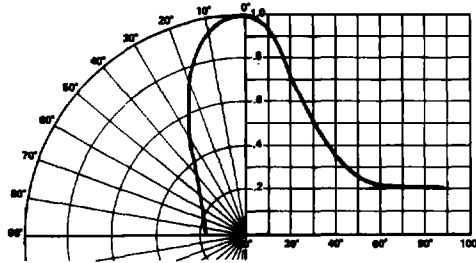


Figure 11. Relative Luminous Intensity vs. Angular Displacement.

T-1 Green/Emerald Green Diffused Lamps




Figure 12. Forward Current vs. Forward Voltage Characteristics.




Figure 13. Relative Luminous Intensity vs. Forward Current.




Figure 14. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak LED Current.




Figure 15. Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX Ratings).

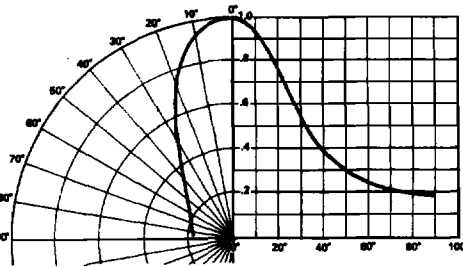


Figure 16. Relative Luminous Intensity vs. Angular Displacement.