



REV. Status	TCA NO.	MODEL NO.	RATED CURRENT (ADC)	INDUCTANCE (uH)±20%	DCR (mohm MAX)	OD MAX	HT MAX
REVISION - 12/21/88 HA	P-A4-10267-01	SKC-801	40	30	2.4	55.0(2.17)	33.0(1.30)
REVISION A REVISED AND REDRAWN ON CAD/CAM ADDED SKC-801 05/05/98 TS	P-A4-10267-02	SKC-802	40	50	2.4	57.0(2.24)	34.0(1.34)

SKC-801~802


Schematic Diagram;

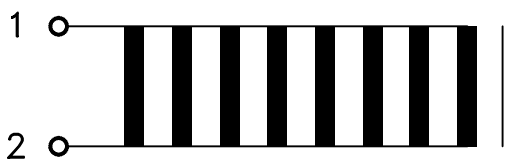

Country of origin

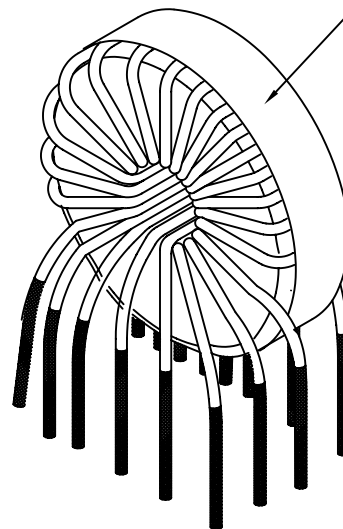

Mechanical Specifications;

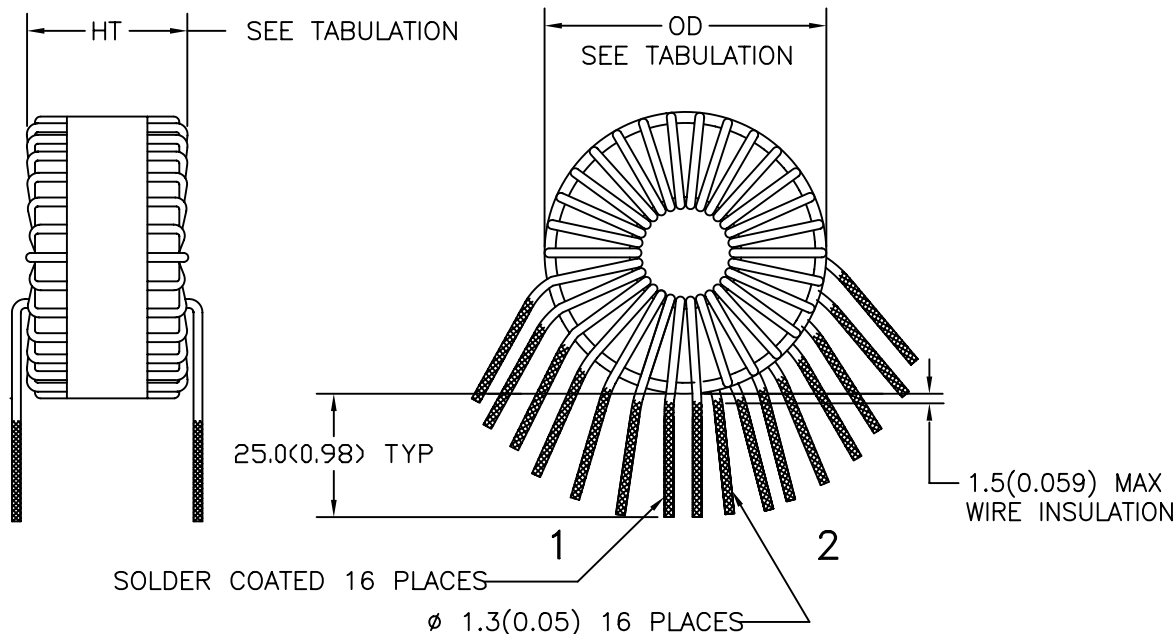

NOTE: Inductance is measured at 1 KHz, 1mA AC current

PREPARED BY:

D. Kelley

ENGINEER:

T. Shiozawa

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Suzuki

DWG CONTROL NO.
P-A4-10267
ACAD\MISCX\A4102671.DWG

REV
A

POWER INDUCTOR FOR
SWITCH MODE POWER SUPPLIES

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

SKC-801~802

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.