
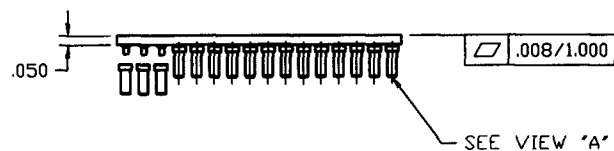


TABLE 2 CONTACTS


[XXX]C	"A" DIM.	"C" DIM.	"K" DIM.	CLIP PLATING	SHELL PLATING	PCB HOLE
710C	.136	.016	Ø.038	30u" GOLD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	Ø.042±.003
714C	.136	.016	Ø.038	100u" TIN/LEAD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	Ø.042±.003
720C	.170	.016	Ø.038	30u" GOLD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	Ø.042±.003
725C	.155	.031	Ø.034	30u" GOLD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	Ø.038±.003
726C	.155	.031	Ø.034	100u" TIN/LEAD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	Ø.038±.003

TABLE 1

PART NUMBER	DIMENSION		
PPC DIP-[]-[XXX]C	"E"	"D"	"F"
308	.300	3	.300
314	.600	6	
316	.700	7	
318	.800	8	
320	.900	9	
322	1.000	10	
324	1.100	11	
328	1.300	13	
624	1.100	11	.600
628	1.300	13	
632	1.500	15	
640	1.900	19	
648	2.300	23	

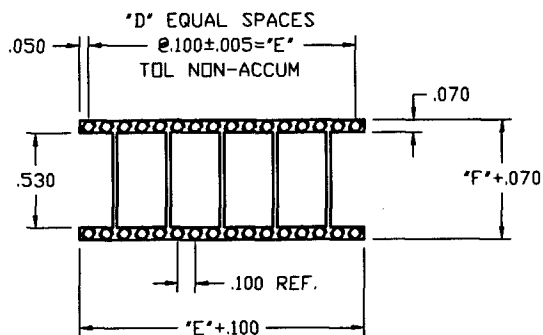

(PPC DIP-632-710C SHOWN)

VIEW "A"
SCALE 5:1

NOTES:

- PRODUCT NUMBERING CODE:
PPC DIP-NNN-[XXX]C
TOTAL NO. OF POSITIONS.
ROW TO ROW SPACING.
- REMOVEABLE CARRIER MATERIAL:
FLUOROPOLYMER, TEFLON GRADE 280, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.
- CONTACT PLATING:
GOLD PER MIL-G-45204, TYPE 1
GRADE C, NICKEL PER QQ-N-290.
TIN/LEAD PER MIL-P-81728, TYPE 1

PART NUMBER (SEE TABLES)
PPC DIP-[]-[XXX]C

 FCI Electronics
www.fciconnect.com

 title
 .100 C/L DIP SOCKETS
 w/PLASTIC PIN CARRIER

 product family DIP
 size dwg no
 A 58710
 code
 sheet 1 of 1

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY
ltr	ecr no	dr	date	linear	angular	
A	V00857	DLW	4/5/00	.XX ±.01	.XXX ±.005	projection
				.XXX ±.005	.XXX ±.0020	
				angles	Ø ±.2	INCH
				dr	D. WOLFORD 4/5/00	
				enr	A. VASBINDER 4/5/00	scale
				chr	A. VASBINDER 4/5/00	
				appd	A. VASBINDER 4/5/00	1:1
sheet index	revision sheet	A	1			

cage code
22526