

Contents

Features	1
Applications	1
Pin Assignment	1
Selection Guide	2
Absolute Maximum Ratings	3
Electrical Characteristics	3
Test Circuits	17
Technical Terms.....	17
Operation.....	18
Transient Response	19
Standard Circuit.....	22
Application Circuits	22
Notes on Design	24
Package Power Dissipation	25
Characteristics.....	26
Measuring Circuits.....	32
Dimensions, Taping.....	33

DISCONTINUED PRODUCT

HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series

The S-812XXSG Series is a three-terminal positive voltage regulator made using the CMOS process. Since the S-812XXSG Series has higher precision output voltage and consumes less current than existing three-terminal voltage regulators, battery-powered portable equipment can have a higher performance and a longer service life.

■ Features

- Low power consumption (2.5 μ A max.)
- High accuracy of output voltage
 $\pm 2\% : V_{OUT} \geq 2.7$ V
 $\pm 2.4\% : V_{OUT} \leq 2.6$ V
- Small input/output voltage difference
 (S-81250SG: 160 mV typ. $I_{OUT}=10$ mA)
- Low temperature coefficient of output voltage
 (S-81250SG: ± 0.625 mV/ $^{\circ}$ C typ.)
- Wide operating voltage range
 (S-81250SG: 16 V max.)
- Good line regulation
 (S-81250SG: 40 mV typ. $I_{OUT}=1\mu$ A to 40 mA)
 TO-92, SOT-89-3 and SOT-23-5 package

■ Block Diagram

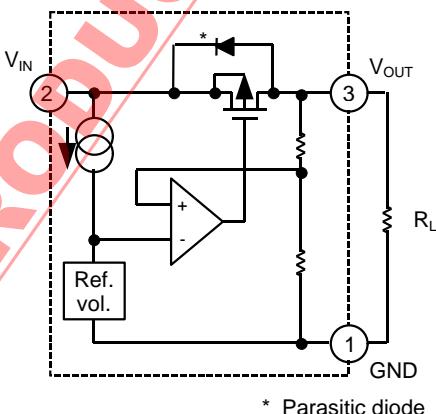



Figure 1

■ Applications

- Constant voltage power supply of battery-powered equipment, communications equipment, video equipment and others

■ Pin Assignment


(1) TO-92



1 GND
2 V_{IN}
3 V_{OUT}

Bottom view
1 2 3

(2) SOT-89-3

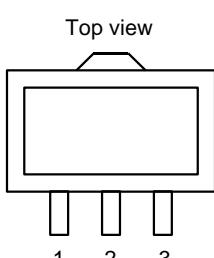

(3) SOT-23-5

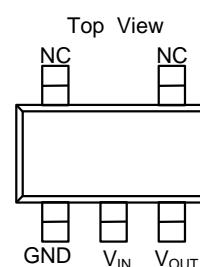


Figure 2

HIGH PRECISION VOLTAGE REGULATOR

S-812XXSG Series

■ Selection Guide

Table 1

Output voltage	TO-92*1	SOT-89-3*2	SOT-23-5*2
1.1±2.4%	S-81211SGY-X	S-81211SGUP-DQA-X	S-81211SG-QA-X
1.2±2.4%	S-81212SGY-X	S-81212SGUP-DQC-X	
1.3±2.4%	S-81213SGY-X	S-81213SGUP-DQG-X	
1.4±2.4%		S-81214SGUP-DQN-X	
1.5±2.4%	S-81215SGY-X	S-81215SGUP-DQK-X	S-81215SG-QK-X
1.6±2.4%	S-81216SGY-X	S-81216SGUP-DQP-X	
1.7±2.4%	S-81217SGY-X	S-81217SGUP-DQQ-X	S-81217SG-QQ-X
1.8±2.4%	S-81218SGY-X	S-81218SGUP-DQR-X	S-81218SG-QR-X
1.9±2.4%	S-81219SGY-X	S-81219SGUP-DQT-X	
2±2.4%	S-81220SGY-X	S-81220SGUP-DQS-X	S-81220SG-QS-X
2.1±2.4%	S-81221SGY-X	S-81221SGUP-DQU-X	S-81221SG-QU-X
2.2±2.4%	S-81222SGY-X	S-81222SGUP-DQV-X	S-81222SG-QV-X
2.3±2.4%	S-81223SGY-X	S-81223SGUP-DQW-X	S-81223SG-QW-X
2.4±2.4%	S-81224SGY-X	S-81224SGUP-DQX-X	S-81224SG-QX-X
2.5±2.4%	S-81225SGY-X	S-81225SGUP-DQH-X	S-81225SG-QH-X
2.6±2.4%	S-81226SGY-X	S-81226SGUP-DQY-X	S-81226SG-QY-X
2.7±2.0%		S-81227SGUP-DQZ-X	S-81227SG-QZ-X
2.8±2.0%		S-81228SGUP-DQ0-X	S-81228SG-Q0-X
2.9±2.0%		S-81229SGUP-DQ2-X	S-81229SG-Q2-X
3±2.0%	S-81230SGY-X	S-81230SGUP-DQB-X	S-81230SG-QB-X
3.1±2.0%			S-81231SG-Q3-X
3.2±2.0%		S-81232SGUP-DQ4-X	S-81232SG-Q4-X
3.3±2.0%	S-81233SGY-X	S-81233SGUP-DQF-X	S-81233SG-QF-X
3.4±2.0%			S-81234SG-Q6-X
3.5±2.0%	S-81235SGY-X	S-81235SGUP-DQI-X	S-81235SG-QI-X
3.6±2.0%		S-81236SGUP-DQ7-X	
3.7±2.0%	S-81237SGY-X	S-81237SGUP-DQE-X	S-81237SG-QE-X
3.8±2.0%		S-81238SGUP-DQ8-X	S-81238SG-Q8-X
3.9±2.0%			
4±2.0%	S-81240SGY-X	S-81240SGUP-DQJ-X	S-81240SG-QJ-X
4.1±2.0%			
4.2±2.0%		S-81242SGUP-DIB-X	S-81242SG-IB-X
4.3±2.0%	S-81243SGY-X	S-81243SGUP-DIC-X	
4.4±2.0%			
4.5±2.0%	S-81245SGY-X	S-81245SGUP-DQ5-X	S-81245SG-Q5-X
4.6±2.0%	S-81246SGY-X	S-81246SGUP-DQM-X	S-81246SG-QM-X
4.7±2.0%		S-81247SGUP-DIE-X	S-81247SG-IE-X
4.8±2.0%			S-81248SG-IF-X
4.9±2.0%			
5±2.0%	S-81250SGY-X	S-81250SGUP-DQD-X	S-81250SG-QD-X
5.1±2.0%			
5.2±2.0%	S-81252SGY-X	S-81252SGUP-DQL-X	S-81252SG-QL-X
5.3±2.0%		S-81253SGUP-DIJ-X	S-81253SG-IJ-X
5.4±2.0%		S-81254SGUP-DIK-X	
5.5±2.0%		S-81255SGUP-DIL-X	
5.6±2.0%	S-81256SGY-X	S-81256SGUP-DIM-X	

*1 In the TO-92 package, "x" differs depending upon the packaging form:

B : Loose

T, Z : Tape

*2 In the SOT package, "x" differs depending upon the packaging form (in the SOT-23-5 package, on-tape packed products only):

S : Stick

T : Tape (T1 and T2 are available depending upon the direction of the IC)

■ Absolute Maximum Ratings

Table 2

(Unless otherwise specified: $T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	Ratings	Unit
Input voltage	V_{IN}	$V_{OUT} \leq 2.6 \text{ V}$	12	V
		$V_{OUT} \geq 2.7 \text{ V}$	18	
Output voltage	V_{OUT}		$V_{IN}+0.3 \text{ to } V_{SS}-0.3$	V
Output current	I_{OUT}		100	mA
Power dissipation	P_D	TO-92	400	mW
		SOT-89-3	500	
		SOT-23-5	150	
Operating temperature	T_{opr}		-40 to +85	°C
Storage temperature	T_{stg}		-40 to +125	°C

Caution: Keep static electricity to a minimum.

■ Electrical Characteristics

1. S-81211SGY-X, S-81211SGUP-DQA-X, S-81211SG-QA-X (1.1-V output type)

Table 3

(Unless otherwise specified: $T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 1.5 \text{ V}, I_{OUT} = 0.5 \text{ mA}$	1.073	1.100	1.127	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5 \text{ mA}$	—	0.05	0.2	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 1.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 0.5 \text{ mA}$	—	10	50	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 1.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 10 \mu\text{A}$	—	10	77	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 1.5 \text{ V}$ $I_{OUT} = 10 \mu\text{A} \text{ to } 0.5 \text{ mA}$	—	10	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 1.5 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 1.5 \text{ V}, I_{OUT} = 0.5 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	±0.138	—	mV/°C	—

2. S-81212SGY-X, S-81213SGUP-DQC-X (1.2-V output type)

Table 4

(Unless otherwise specified: $T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.2 \text{ V}, I_{OUT} = 0.5 \text{ mA}$	1.171	1.200	1.229	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5 \text{ mA}$	—	0.04	0.18	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.2 \text{ to } 10 \text{ V}$ $I_{OUT} = 0.5 \text{ mA}$	—	10	50	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.2 \text{ to } 10 \text{ V}$ $I_{OUT} = 10 \mu\text{A}$	—	10	84	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.2 \text{ V}$ $I_{OUT} = 10 \mu\text{A} \text{ to } 10 \text{ mA}$	—	10	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.3 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.2 \text{ V}, I_{OUT} = 0.5 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	±0.150	—	mV/°C	—

HIGH PRECISION VOLTAGE REGULATOR

S-812XXSG Series

3. S-81213SGY-X, S-81213SGUP-DQG-X (1.3-V output type)

Table 5

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.3 \text{ V}, I_{OUT} = 0.5 \text{ mA}$	1.268	1.300	1.332	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5 \text{ mA}$	—	0.02	0.14	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.3 \text{ to } 10 \text{ V}$ $I_{OUT} = 0.5 \text{ mA}$	—	10	50	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.3 \text{ to } 10 \text{ V}$ $I_{OUT} = 10 \mu\text{A}$	—	10	91	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.3 \text{ V}$ $I_{OUT} = 10 \mu\text{A} \text{ to } 10 \text{ mA}$	—	10	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.3 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.3 \text{ V}, I_{OUT} = 0.5 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.163	—	$\text{mV}/^\circ\text{C}$	—

4. S-81214SGUP-DQN-X (1.4-V output type)

Table 6

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.4 \text{ V}, I_{OUT} = 0.5 \text{ mA}$	1.366	1.400	1.434	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5 \text{ mA}$	—	0.04	0.23	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.4 \text{ to } 10 \text{ V}$ $I_{OUT} = 0.5 \text{ mA}$	—	7	36	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.4 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	7	98	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.4 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 10 \text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.4 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.4 \text{ V}, I_{OUT} = 0.5 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.175	—	$\text{mV}/^\circ\text{C}$	—

5. S-81215SGY-X, S-81215SGUP-DQK-X, S-81215SG-QK-X (1.5-V output type)

Table 7

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.5 \text{ V}, I_{OUT} = 0.5 \text{ mA}$	1.464	1.500	1.536	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5 \text{ mA}$	—	0.03	0.18	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 0.5 \text{ mA}$	—	7	39	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	7	105	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.5 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 10 \text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.5 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.5 \text{ V}, I_{OUT} = 0.5 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.188	—	$\text{mV}/^\circ\text{C}$	—

6. S-81216SGUP-DQP-X, S-81216SGY-X (1.6-V output type)

Table 8

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.6\text{ V}, I_{OUT} = 0.5\text{ mA}$	1.561	1.600	1.639	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 0.5\text{ mA}$	—	0.02	0.14	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.6\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	7	41	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.6\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	7	112	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.6\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.3\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.3\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.200	—	mV/°C	—

7. S-81217SG-QQ-X (1.7-V output type)

Table 9

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.7\text{ V}, I_{OUT} = 10\text{ mA}$	1.659	1.700	1.741	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.77	1.63	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.7\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	8	43	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.7\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	8	119	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.7\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.7\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.7\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.213	—	mV/°C	—

8. S-81218SG-QR-X (1.8-V output type)

Table 10

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.8\text{ V}, I_{OUT} = 10\text{ mA}$	1.756	1.800	1.843	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.72	1.55	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.8\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	8	45	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.8\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	8	126	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.8\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 3.8\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 3.8\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.225	—	mV/°C	—

HIGH PRECISION VOLTAGE REGULATOR

S-812XXSG Series

9. S-81219SGUP-DQT-X, S-81219SGY-X (1.9-V output type)

Table 11

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 3.9 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	1.854	1.900	1.946	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.67	1.47	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 2.9 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	8	47	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 2.9 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	8	133	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 3.9 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.3 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.3 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.238	—	mV/°C	—

10. S-81220SGY-X, S-81220SGUP-DQS-X, S-81220SG-QS-X (2.0-V output type)

Table 12

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.0 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	1.592	2.000	2.048	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.63	1.39	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.0 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	8	48	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.0 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	8	140	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.0 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.0 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.0 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.250	—	mV/°C	—

11. S-81221SGUP-DQU-X (2.1-V output type)

Table 13

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.1 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	2.049	2.100	2.151	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.59	1.32	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.1 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	9	50	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.1 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	9	147	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.1 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$ to 10 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.1 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.1 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.263	—	mV/°C	—

12. S-81222SGY-X, S-81222SGUP-DQV-X, S-81222SG-QV-X (2.2-V output type)

Table 14

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.2\text{ V}, I_{OUT} = 10\text{ mA}$	2.147	2.200	2.253	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.56	1.26	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.2\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	9	52	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.2\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	9	154	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.2\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A to }10\text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.2\text{ V, Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.3\text{ V, }I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C to }85^\circ\text{C}$	—	± 0.275	—	$\text{mV/}^\circ\text{C}$	—

13. S-81223SGY-X, S-81223SG-QW-X (2.3-V output type)

Table 15

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.3\text{ V, }I_{OUT} = 10\text{ mA}$	2.244	2.300	2.356	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.53	1.20	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.3\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	9	54	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.3\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	9	161	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.3\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A to }10\text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.3\text{ V, Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.3\text{ V, }I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C to }85^\circ\text{C}$	—	± 0.288	—	$\text{mV/}^\circ\text{C}$	—

14. S-81224SGY-X, S-81224SGUP-DQX-X, S-81224SG-QX-X (2.4-V output type)

Table 16

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.4\text{ V, }I_{OUT} = 10\text{ mA}$	2.342	2.400	2.458	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.49	1.15	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.4\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	10	55	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.4\text{ to }10\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	10	168	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.4\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A to }10\text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.4\text{ V, Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.4\text{ V, }I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C to }85^\circ\text{C}$	—	± 0.300	—	$\text{mV/}^\circ\text{C}$	—

HIGH PRECISION VOLTAGE REGULATOR

S-812XXSG Series

15. S-81225SGY-X, S-81225SGUP-DQH-X, S-81225SG-QH-X (2.5-V output type)

Table 17

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.5 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	2.440	2.500	2.560	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.59	1.32	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	10	57	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.5 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	10	175	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.5 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 10 \text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.5 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.5 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.313	—	$\text{mV}/^\circ\text{C}$	—

16. S-81226SGY-X, S-81226SGUP-DQY-X, S-81226SG-QY-X (2.6-V output type)

Table 18

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.6 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	2.537	2.600	2.663	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.55	1.26	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.6 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	10	58	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.6 \text{ to } 10 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	10	182	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.6 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 10 \text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.2 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	10	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.6 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.325	—	$\text{mV}/^\circ\text{C}$	—

17. S-81227SGUP-DQZ-X (2.7-V output type)

Table 19

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.7 \text{ V}$, $I_{OUT} = 10 \text{ mA}$	2.646	2.700	2.754	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.52	1.20	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.7 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	36	72	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.7 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	36	189	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.7 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 20 \text{ mA}$	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.7 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.7 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.338	—	$\text{mV}/^\circ\text{C}$	—

18. S-81228SGUP-DQ0-X, S-81228SG-Q0-X (2.8-V output type)

Table 20

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.6\text{ V}, I_{OUT} = 10\text{ mA}$	2.744	2.800	2.856	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.49	1.14	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.8\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	37	111	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.8\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	37	196	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.8\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 20 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.2\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.8\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.350	—	$\text{mV}/^\circ\text{C}$	—

19. S-81229SGUP-DQ2-X, S-81229SG-Q2-X (2.9-V output type)

Table 21

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 4.9\text{ V}, I_{OUT} = 10\text{ mA}$	2.842	2.900	2.958	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.46	1.09	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 3.9\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	38	114	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 3.9\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	38	203	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 4.9\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 20 mA	—	80	120	mV	1
Current consumption	I_{SS}	$V_{IN} = 4.2\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 4.9\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.363	—	$\text{mV}/^\circ\text{C}$	—

20. S-81230SGY-X, S-81230SGUP-DQB-X, S-81230SG-QB-X (3.0-V output type)

Table 22

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.0\text{ V}, I_{OUT} = 10\text{ mA}$	2.940	3.000	3.060	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10\text{ mA}$	—	0.44	1.04	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.0\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ mA}$	—	39	78	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.0\text{ to }16\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$	—	39	210	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5\text{ V}$ $I_{OUT} = 1\text{ }\mu\text{A}$ to 20 mA	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.0\text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.0\text{ V}, I_{OUT} = 10\text{ mA}$ $T_a = -40^\circ\text{C}$ to 85°C	—	± 0.375	—	$\text{mV}/^\circ\text{C}$	—

HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series

21. S-81231SG-Q3-X (3.1-V output type)

Table 23

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.1 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.038	3.100	3.162	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.42	0.99	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.1 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	40	80	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.1 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	40	217	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.1 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 20 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.1 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.1 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.388	—	$\text{mV}/^\circ\text{C}$	—

22. S-81232SGUP-DQ4-X, S-81232SG-Q4-X (3.2-V output type)

Table 24

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.2 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.136	3.200	3.264	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.39	0.95	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	41	82	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	41	224	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.2 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 20 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.2 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.2 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.400	—	$\text{mV}/^\circ\text{C}$	—

23. S-81233SGY-X, S-81233SGUP-DQF-X, S-81233SG-QF-X (3.3-V output type)

Table 25

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.3 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.234	3.300	3.366	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.37	0.91	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	42	84	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	42	231	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.3 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 20 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.3 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.3 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.413	—	$\text{mV}/^\circ\text{C}$	—

24. S-81234SG-Q6-X (3.4-V output type)

Table 26

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.4 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.332	3.400	3.468	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.35	0.87	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.4 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	43	86	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.4 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	43	238	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.4 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 20 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.2 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.4 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.425	—	$\text{mV}/^\circ\text{C}$	—

25. S-81235SGY-X, S-81235SGUP-DQI-X, S-81235SG-QI-X (3.5-V output type)

Table 27

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.5 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.430	3.500	3.570	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.34	0.84	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	44	88	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	44	245	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.5 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.5 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.5 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.438	—	$\text{mV}/^\circ\text{C}$	—

26. S-81236SGUP-DQ7-X (3.6-V output type)

Table 28

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.6 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.528	3.600	3.672	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 16 \text{ mA}$	—	0.32	0.81	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.6 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	45	90	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.6 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	45	252	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.6 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.6 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 5.6 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.450	—	$\text{mV}/^\circ\text{C}$	—

HIGH-PRECISION VOLTAGE REGULATOR S-812XXSG Series

27. S-81237SGY-X, S-81237SGUP-DQE-X, S-81237SG-QE-X (3.7-V output type)

Table 29

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.7 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.626	3.700	3.774	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.31	0.78	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.7 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	46	92	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.7 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	46	259	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.7 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.7 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=5.7 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.463	—	$\text{mV}/^\circ\text{C}$	—

28. S-81238SGUP-DQ8-X, S-81238SG-Q8-X (3.8-V output type)

Table 30

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 5.8 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.724	3.800	3.876	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.29	0.75	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 4.8 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	47	93	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 4.8 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	47	266	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 5.8 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	60	100	mV	1
Current consumption	I_{SS}	$V_{IN} = 5.8 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=5.8 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.475	—	$\text{mV}/^\circ\text{C}$	—

29. S-81240SGY-X, S-81240SGUP-DQJ-X, S-81240SG-QJ-X (4.0-V output type)

Table 31

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.0 \text{ V}, I_{OUT} = 10 \text{ mA}$	3.920	4.000	4.080	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.27	0.70	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.0 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	48	96	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.0 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	48	280	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.0 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.0 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=6.0 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.500	—	$\text{mV}/^\circ\text{C}$	—

30. S-81242SG-IB-X (4.2-V output type)

Table 32

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.52V, I_{OUT} = 10 \text{ mA}$	4.116	4.200	4.284	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.24	0.65	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	50	100	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	50	294	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.2 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.2 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.2 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.525	—	$\text{mV}/^\circ\text{C}$	—

31. S-81243SGY-X, S-81243SGUP-DIC-X (4.3-V output type)

Table 33

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.3V, I_{OUT} = 10 \text{ mA}$	4.214	4.300	4.386	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.23	0.63	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	51	101	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	51	301	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.3 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.3 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.3 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.538	—	$\text{mV}/^\circ\text{C}$	—

32. S-81245SGY-X, S-81245SGUP-DQ5-X, S-81245SG-Q5-X (4.5-V output type)

Table 34

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.5 \text{ V}, I_{OUT} = 10 \text{ mA}$	4.410	4.500	4.590	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.21	0.58	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	52	104	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	52	315	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.5 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.5 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 6.5 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.563	—	$\text{mV}/^\circ\text{C}$	—

HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series

33. S-81246SGY-X, S-81246SGUP-DQM-X, S-81246SG-QM-X (4.6-V output type)

Table 35

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.6 \text{ V}, I_{OUT} = 10 \text{ mA}$	4.508	4.600	4.692	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.20	0.57	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.6 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	53	105	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.6 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	53	322	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.6 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.6 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=6.6 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.575	—	$\text{mV}/^\circ\text{C}$	—

34. S-81247SG-IE-X (4.7-V output type)

Table 36

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.7 \text{ V}, I_{OUT} = 10 \text{ mA}$	4.606	4.700	4.794	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.19	0.55	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.7 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	54	107	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.7 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	54	329	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.7 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.7 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=6.7 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.588	—	$\text{mV}/^\circ\text{C}$	—

35. S-81248SG-IF-X (4.8-V output type)

Table 37

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 6.3 \text{ V}, I_{OUT} = 10 \text{ mA}$	4.704	4.800	4.896	V	1
I/O voltage difference	V_{dif}	$I_{OUT}=10 \text{ mA}$	—	0.18	0.53	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 5.8 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \text{ mA}$	—	54	108	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 5.8 \text{ to } 16 \text{ V}$ $I_{OUT}=1 \mu\text{A}$	—	54	336	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 6.8 \text{ V}$ $I_{OUT}=1 \mu\text{A} \text{ to } 30 \text{ mA}$	—	50	90	mV	1
Current consumption	I_{SS}	$V_{IN} = 6.8 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN}=6.8 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a=-40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.600	—	$\text{mV}/^\circ\text{C}$	—

36. S-81250SGY-X, S-81250SGUP-DQD-X, S-81250SG-QD-X (5.0-V output type)

Table 38

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.0 \text{ V}, I_{OUT} = 10 \text{ mA}$	4.900	5.000	5.100	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.16	0.50	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.0 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	55	110	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.0 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	55	350	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.0 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.0 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.0 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.625	—	$\text{mV}/^\circ\text{C}$	—

37. S-81252SGY-X, S-81252SGUP-DQL-X, S-81252SG-QL-X (5.2-V output type)

Table 39

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.2 \text{ V}, I_{OUT} = 10 \text{ mA}$	5.096	5.200	5.304	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.15	0.47	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	57	113	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.2 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	57	364	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.2 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.2 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.2 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.650	—	$\text{mV}/^\circ\text{C}$	—

38. S-81253SGUP-DIJ-X (5.3-V output type)

Table 40

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.3 \text{ V}, I_{OUT} = 10 \text{ mA}$	5.194	5.300	5.406	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.14	0.45	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	57	114	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.3 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	57	371	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.3 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.3 \text{ V}, \text{ Unloaded}$	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.3 \text{ V}, I_{OUT} = 10 \text{ mA}$ $T_a = -40^\circ\text{C} \text{ to } 85^\circ\text{C}$	—	± 0.663	—	$\text{mV}/^\circ\text{C}$	—

HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series

39 . S-81254SGUP-DIK-X (5.4-V output type)

Table 41

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.4 \text{ V}, I_{OUT} = 10 \text{ mA}$	5.292	5.400	5.508	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.13	0.44	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.4 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	58	115	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.4 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	58	378	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.4 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.4 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.4 \text{ V}, I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.675	—	$\text{mV/}^\circ\text{C}$	—

40. S-81255SGUP-DIL-X (5.5-V output type)

Table 42

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.5 \text{ V}, I_{OUT} = 10 \text{ mA}$	5.390	5.500	5.610	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.13	0.43	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	58	116	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.5 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	58	385	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.5 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.5 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.5 \text{ V}, I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.688	—	$\text{mV/}^\circ\text{C}$	—

41. S-81256SGUP-DIM-X (5.6-V output type)

Table 43

(Unless otherwise specified: Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Test cir.
Output voltage	V_{OUT}	$V_{IN} = 7.6 \text{ V}, I_{OUT} = 10 \text{ mA}$	5.488	5.600	5.712	V	1
I/O voltage difference	V_{dif}	$I_{OUT} = 10 \text{ mA}$	—	0.12	0.42	V	1
Line regulation 1	ΔV_{OUT1}	$V_{IN} = 6.6 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \text{ mA}$	—	59	117	mV	1
Line regulation 2	ΔV_{OUT2}	$V_{IN} = 6.6 \text{ to } 16 \text{ V}$ $I_{OUT} = 1 \mu\text{A}$	—	59	392	mV	1
Load regulation	ΔV_{OUT3}	$V_{IN} = 7.6 \text{ V}$ $I_{OUT} = 1 \mu\text{A} \text{ to } 40 \text{ mA}$	—	40	80	mV	1
Current consumption	I_{SS}	$V_{IN} = 7.6 \text{ V}$, Unloaded	—	1.2	2.5	μA	2
Input voltage	V_{IN}		—	—	16	V	—
Temperature characteristic of ΔV_{OUT}	$\frac{\Delta V_{OUT}}{\Delta T_a}$	$V_{IN} = 7.6 \text{ V}, I_{OUT} = 10 \text{ mA}$ Ta=-40°C to 85°C	—	± 0.7	—	$\text{mV/}^\circ\text{C}$	—

■ Test Circuits

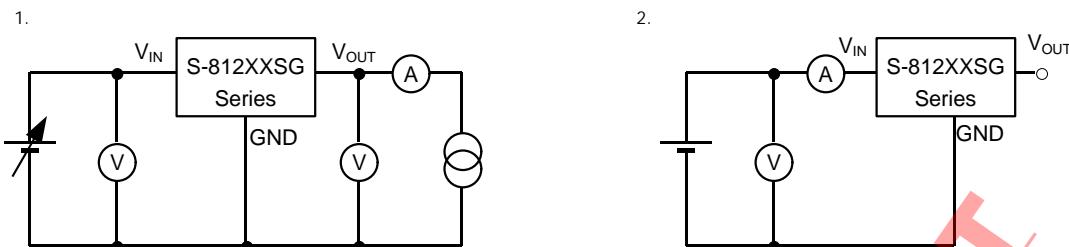


Figure 3

■ Technical Terms

1 Output voltage (V_{OUT})

The precision of output voltage is guaranteed at $\pm 2.0\%$ or $\pm 2.4\%$ under the prescribed conditions of input voltage, output voltage, and temperature, which differ with items. If these conditions are varied, output voltage value may change into beyond the scope of precision of output voltage. See electrical characteristics and characteristics data for detail.

2 Line regulations 1 and 2 (ΔV_{OUT1} , ΔV_{OUT2})

Indicates the input voltage dependencies of output voltage. That is, the values express how the output voltage changes, when input voltage is changed under the condition that output current is fixed.

3 Load regulation (ΔV_{OUT3})

Indicates the output current dependencies of output voltage. That is, the values express how the output voltage changes, when output current is changed under the condition that input voltage is fixed.

4 I/O voltage difference (V_{dif})

98% of V_{OUT} is output when the voltage of $V_{OUT}+V_{dif}$ is applied. When V_{dif} is small, output keeps a constant voltage in the small side of input voltage and large output current can be obtained.

NOTE : V_{dif} is highly dependent on I_{OUT} .

HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series

■ Operation

1 Basic operation

Figure 4 shows the block diagram of the S-812XXSG Series. The error amplifier compares a reference voltage V_{REF} with a part of the output voltage fed back by the feedback resistors R_A and R_B . It supplies the control transistor with the gate current, necessary to keep a stable output voltage range not influenced by input voltage or temperature fluctuation.

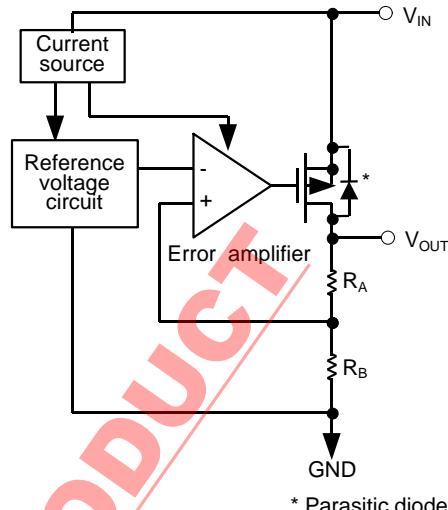


Figure 4 Reference block diagram

2 Internal circuit

2.1 Reference voltage circuit

In a voltage regulator, the reference voltage circuit plays a very important role because any change will show up directly at an output.

The S-812XXSG Series has 0.8 V typical stable voltage circuit as a highly stable reference voltage source.

Features:

- Low power consumption
- Good temperature characteristic

2.2 Error amplifier

The error amplifier consumes very low current because it is a differential amplifier in a stable current circuit.

Features:

- Good matching characteristics
- Wide operating voltage range
- Low offset voltage

2.3 Control transistor

The S-812XXSG Series has a Pch MOS transistor as a current control transistor shown in Figure 6. Therefore an output current I_{OUT} is expressed by the following formula where there is only a small difference between input and output voltages:

$$I_{OUT} = KP \{ 2(V_{GS} - V_{TP}) (V_{IN} - V_{OUT}) - (V_{IN} - V_{OUT})^2 \}$$

* KP : Conductive coefficient

V_{TP} : Threshold voltage of a control transistor

Setting KP to the large value results in a voltage regulator with 160 mV typical I/O voltage difference.


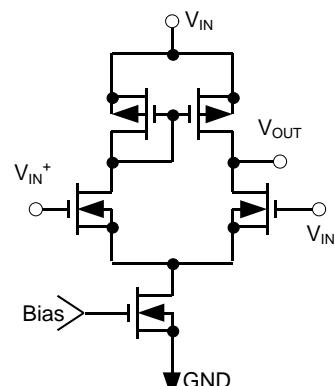


Figure 5 Error amplifier

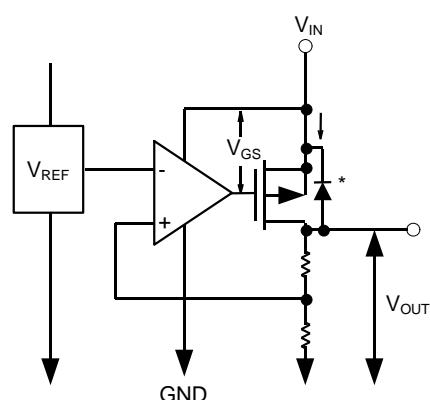

* Parasitic diode

Figure 6 Control transistor

3 Temperature characteristic of output voltage

The temperature characteristic of the output voltage is expressed by the following formula in the range of -40°C to 85°C.

$$\frac{V_{\text{OUT}}}{V_{\text{REF}}} \times (\pm 0.1) \text{ mV/}^{\circ}\text{C typ.}$$

* V_{REF} is 0.7 V min., 0.8 V typ., 0.9 V max.

■ Transient Response

1. Line transient response

The overshoot and undershoot are caused in the output voltage if the input voltage fluctuates while the output current is constant. Figure 7 shows the output voltage fluctuation due to input voltage change between 6.0 V and 10 V in square wave. Table 44 shows the parameter dependency when input voltage fluctuates. For reference, Figure 8 describes the measurement circuit.

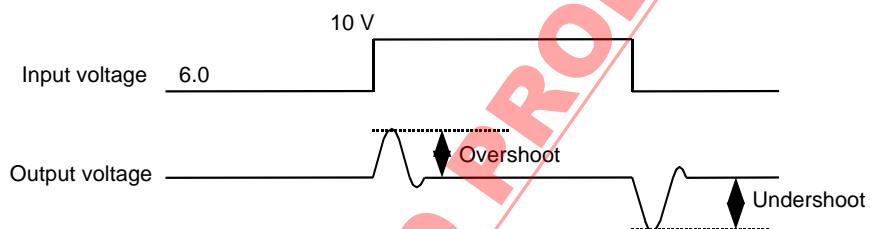


Figure 7 Output voltage fluctuation due to input voltage fluctuation

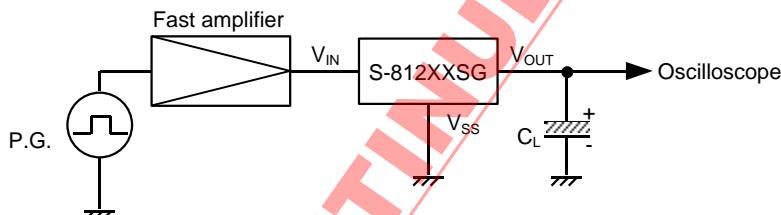


Figure 8 Measuring circuit

Table 44 Parameter dependency due to input voltage fluctuation

Parameter	Method to decrease overshoot	Method to decrease undershoot
Output current I_{OUT}	Decrease	Decrease
Load capacitance C_L	Increase	Increase
Input voltage fluctuation ΔV_{IN}^*	Decrease	Decrease
Temperature T_a	—	High temperature

* ΔV_{IN} : High voltage value - low voltage value


For reference, the next page describes the results of measuring the ringing amounts at the V_{OUT} pin using the output current (I_{OUT}), load capacitance (C_L), input voltage fluctuation width (ΔV_{IN}), and temperature as parameters.

HIGH-PRECISION VOLTAGE REGULATOR S-812XXSG Series


Reference data

Line transient response of S-81250SG

1. I_{OUT} dependency

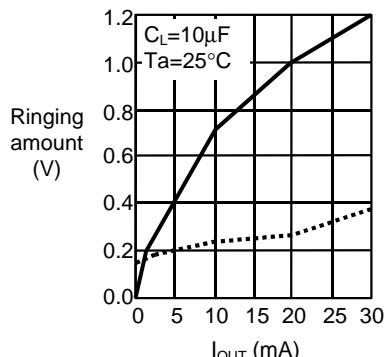


2. C_L dependency

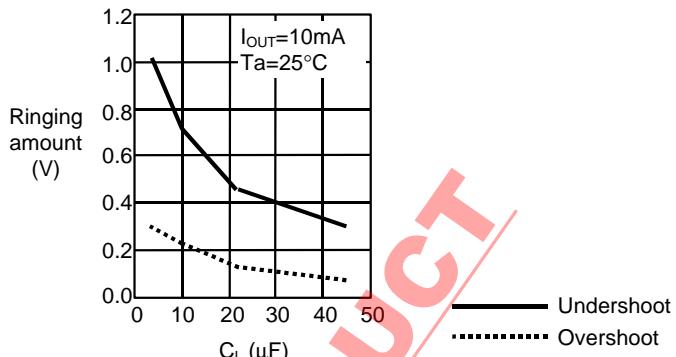


3. ΔV_{IN} dependency

ΔV_{IN} shows the difference between the low voltage fixed to 6 V and the high voltage. For example, $\Delta V_{IN} = 2$ V means the difference between 6 V and 8 V.

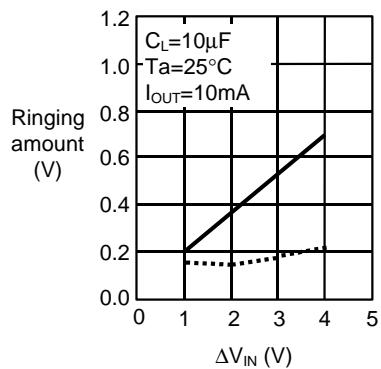

4. Temperature dependency

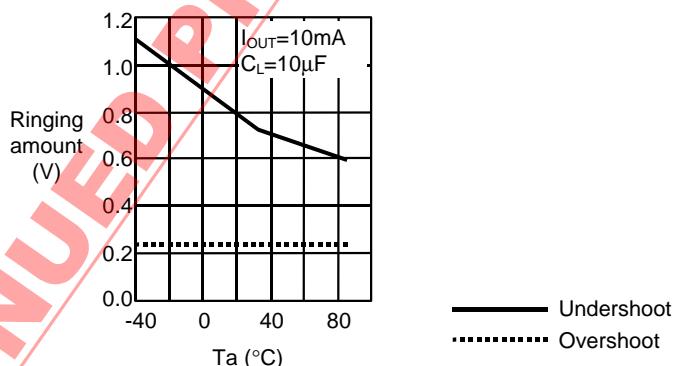

2. Load transient response

The overshoot and undershoot are caused in the output voltage if the output current fluctuates while the input voltage is constant. Figure 9 shows the output voltage fluctuation due to output current change between 10mA and 1 μA in square wave. Table 45 shows the parameter dependency when output current fluctuates. For reference, Figure 10 describes the measuring circuit.

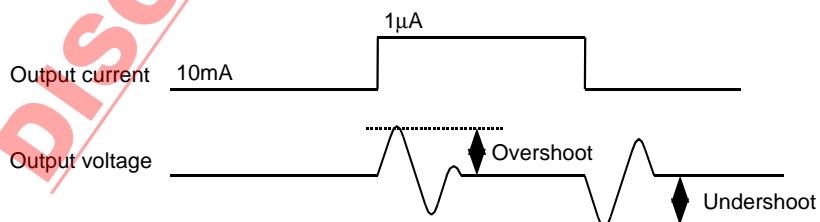


Figure 9 Output voltage fluctuation due to output current fluctuation

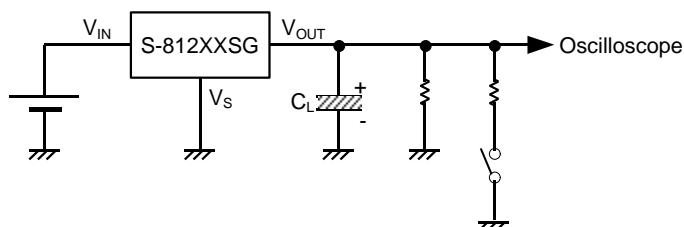


Figure 10 Measuring circuit

Table 45 Parameter dependency due to output current fluctuation


Parameter	Method to decrease overshoot	Method to decrease undershoot
Output current fluctuation ΔI_{OUT}	Decrease	Decrease
Load capacitance C_L	Increase	Increase
Input voltage V_{IN}	Increase	Increase
Temperature T_a	—	—

For reference, the following describes the results of measuring the ringing amounts at the V_{OUT} pin using the input voltage (V_{IN}), load capacitance (C_L), output current fluctuation width (ΔI_{OUT}), and temperature as parameters.


Reference data

Load transient response of S-81250SG

1. V_{IN} dependency

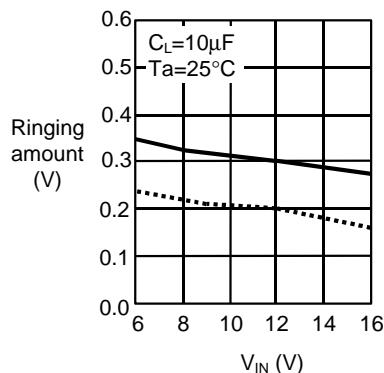


2. C_L dependency

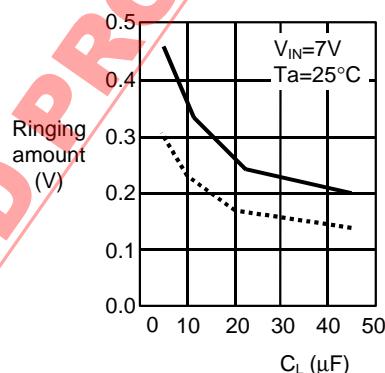


3. ΔI_{OUT} dependency

ΔI_{OUT} shows the difference between the low current fixed to 1 μ A and the high. For example, $\Delta I_{OUT}=10$ mA means the difference between 10mA and 1 μ A.

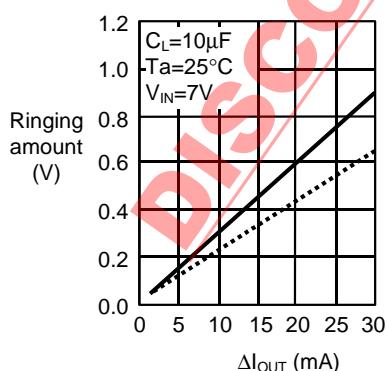

4. Temperature dependency

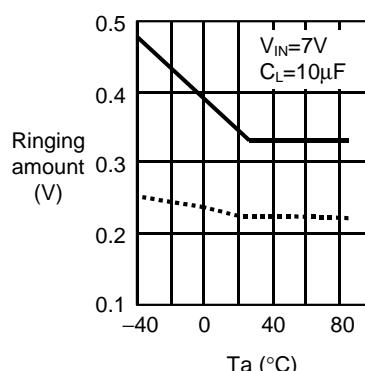

— Undershoot
····· Overshoot

HIGH-PRECISION VOLTAGE REGULATOR S-812XXSG Series

■ Standard Circuit

The basic circuit using the S-812XXSG Series is shown in Figure 11.

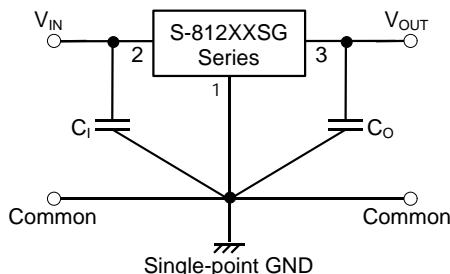


Figure 11

■ Application Circuits

1. High output current positive voltage regulator

Figure 12 shows a circuit for increasing the output current.

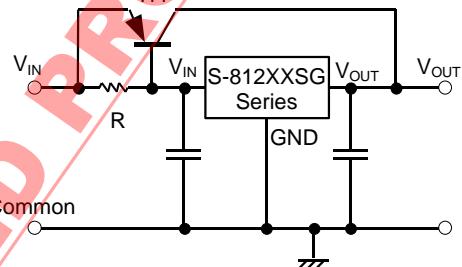


Figure 12

Short-circuit protection of Tr1 is possible by adding the sense resistor R_S and the PNP transistor as shown in Figure 13.

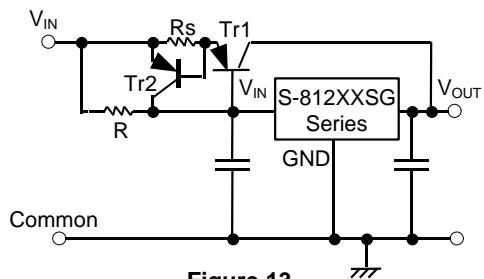


Figure 13

2. Circuits for increasing output voltage

If the output voltage you need cannot be found in our product line-up, the designs in Figures 14 or 15 will increase output voltages easily.

$$V_{OUT} = V_{XX} \left(1 + \frac{R_2}{R_1} \right) + I_{SS} \cdot R_2 \approx V_{XX} \left(1 + \frac{R_2}{R_1} \right)$$

Because of its low current consumption, the S-812XXSG Series can set the resistor values, and R_1 and R_2 high to lower the power consumption of whole systems.

Current flows to the Zener diode (Di) through the quiescent current (I_{SS}) of the S-812XXSG Series, and the GND terminal rises for the voltage of Di.

When Di cannot drive with a quiescent current, the added resistance R increases the current flowing through Di.

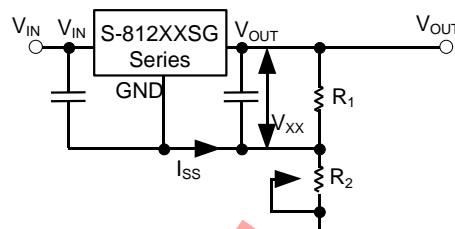


Figure 14

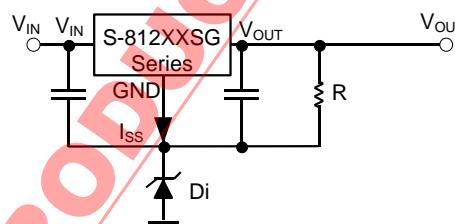


Figure 15

3. Constant current regulator

The S-812XXSG Series can be used as a constant-current regulator within allowable dissipation limits.

$$I_{OUT} = \frac{V_{XX}}{R_A} + I_{SS}$$

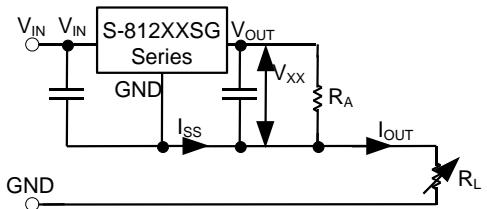


Figure 16 Constant current regulator

4. Dual supply

A dual supply can be formed using the S-812XXSG Series.

Figure 17 shows a circuit example for receiving two outputs (5 V and 8 V) with the S-81230SG and the S-81250SG. As the resistance R lets the quiescent current of IC1 pass, R is unnecessary if the minimum output current of IC2 is more than the IC1 quiescent current.

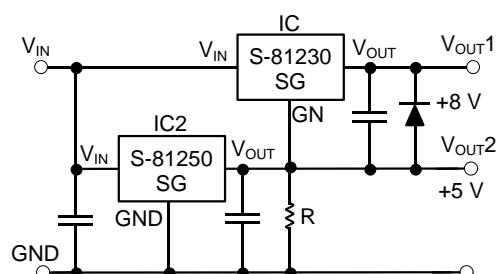


Figure 17 Dual power source

■ Notes on Design

- Voltage regulators may oscillate if small or zero capacity is connected to IC input when the impedance of the power source is high and a large capacity is connected to IC output.
- The S-812XXSG Series has no short-current circuit limiting. The element may break by exceed current of erroneous short-current.
- Keep the output current more than 10 μ A when using the product of $V_{OUT} \leq 2.6$ V under the condition of high input voltage and high temperature.
- Do not apply any ripple voltage under the condition in Figure 18 to V_{IN} terminal.

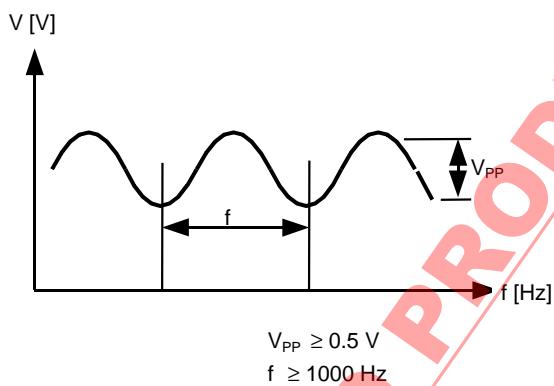


Figure 18

- Mount diodes for IC protection, when connecting another power supply to V_{OUT} terminal.


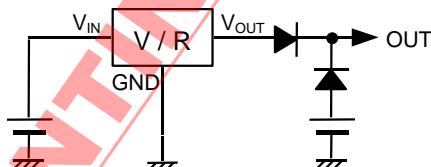


Figure 19


- When designing for mass production using an application circuit described here, keep the deviation of components and temperature characteristic.

■ Package Power Dissipation

(1) TO-92

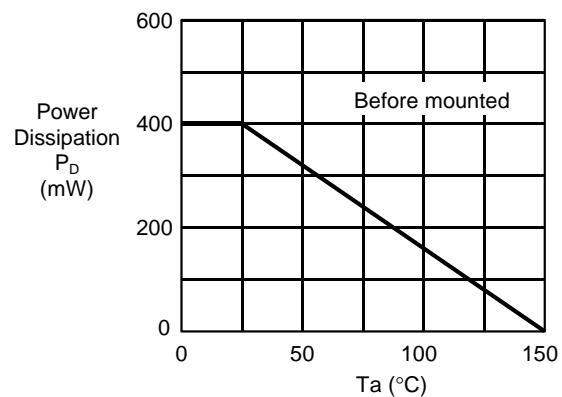

(2) SOT-89-3

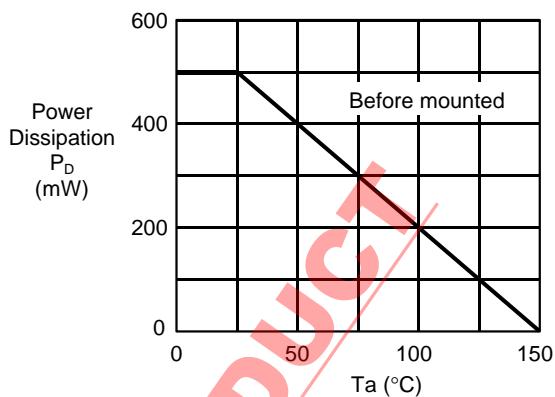

(3) SOT-23-5

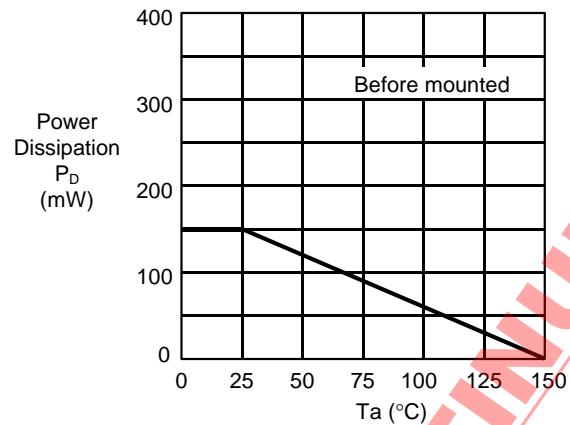


Figure 20


HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series


■ Characteristics

1 Input voltage - output voltage


1.1 S-81211SG series

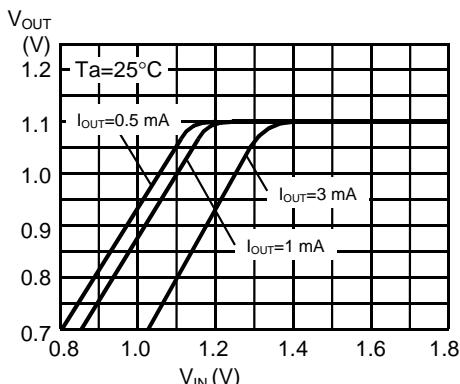


1.2 S-81215SG series

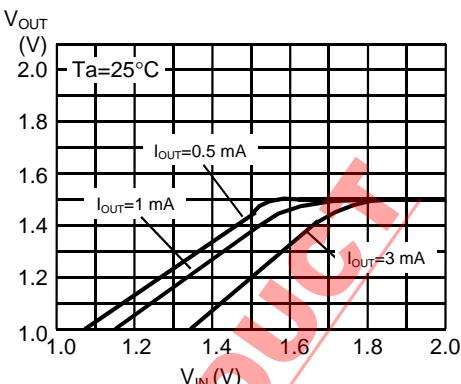


1.3 S-81220SG series

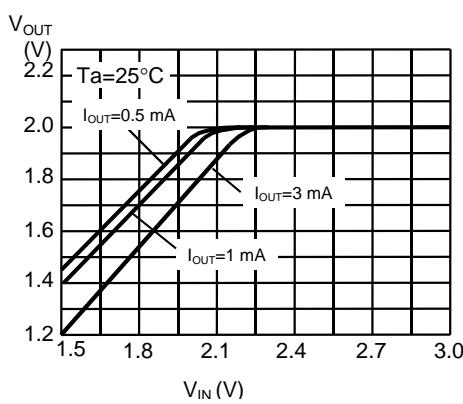


1.4 S-81225SG series

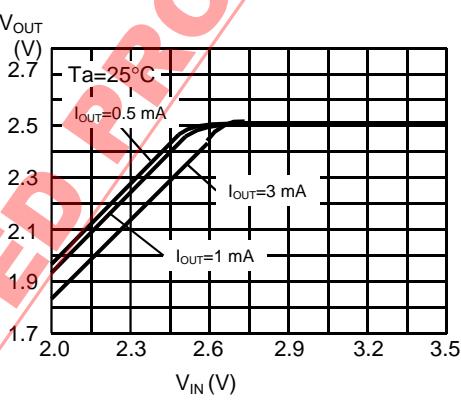


1.5 S-81230SG series

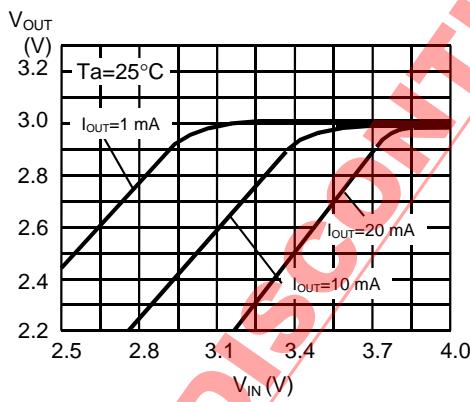


1.6 S-81235SG series

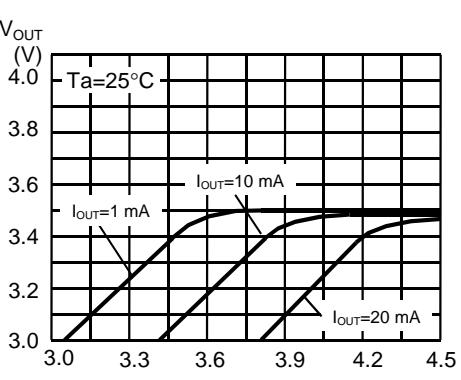


1.7 S-81240SG series

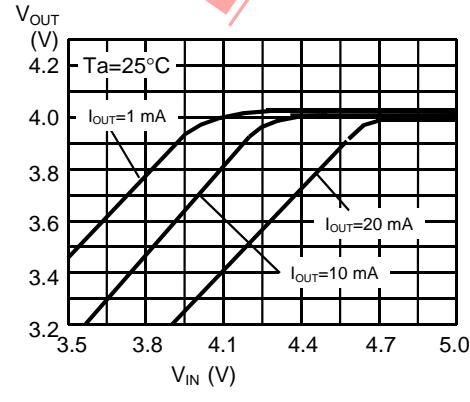

1.8 S-81245SG series

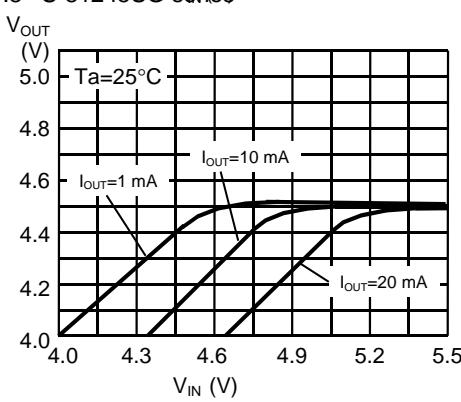


1.9 S-81250SG series

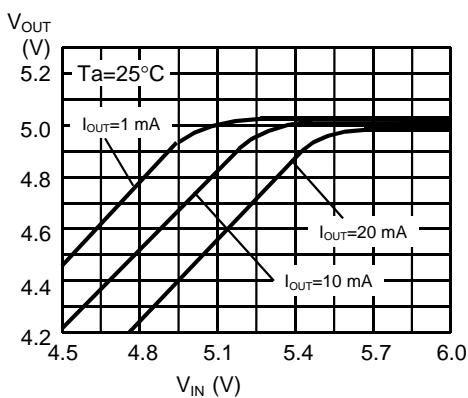


2. Output current - output voltage


2.1 S-81211SG series

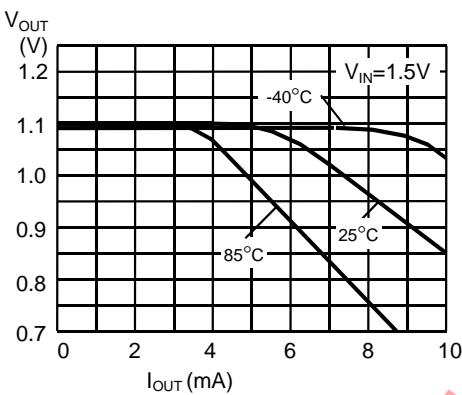


2.3 S-81220SG series

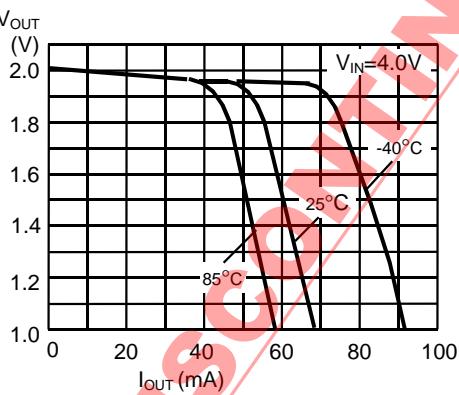


2.5 S-81230SG series

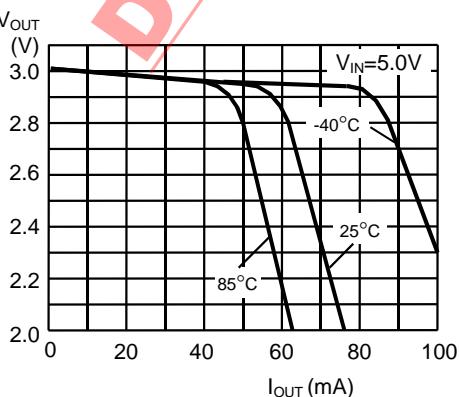


2.2 S-81215SG series

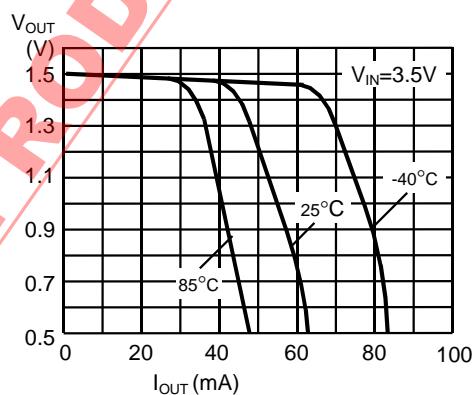

2.4 S-81225SG series

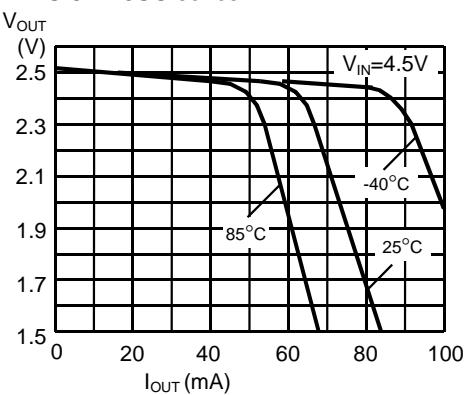


2.6 S-81235SG series

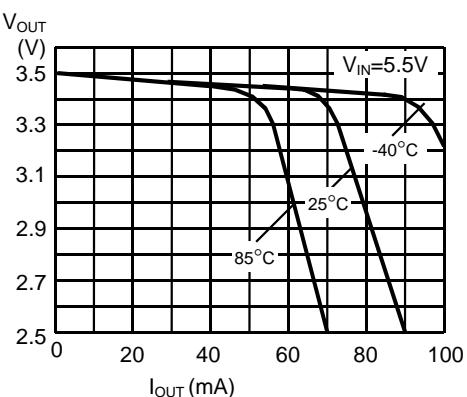


HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series


2.7 S-81240SG series

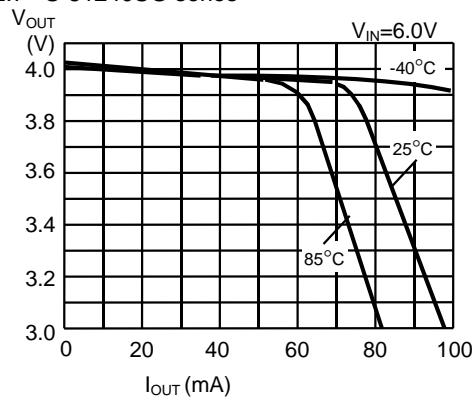

2.8 S-81245SG series

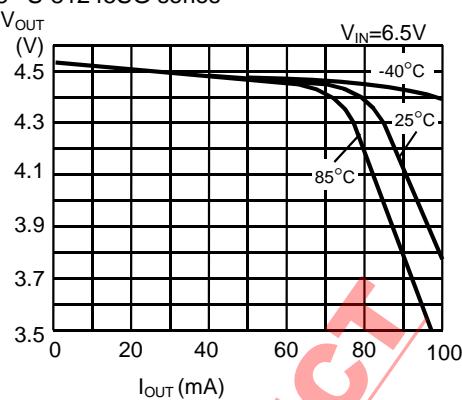


2.9 S-81250SG series

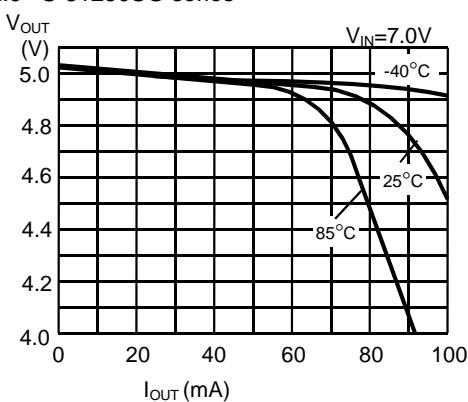


3. Output current - output voltage (at low load)


3.1 V_{OUT}≤1.4V

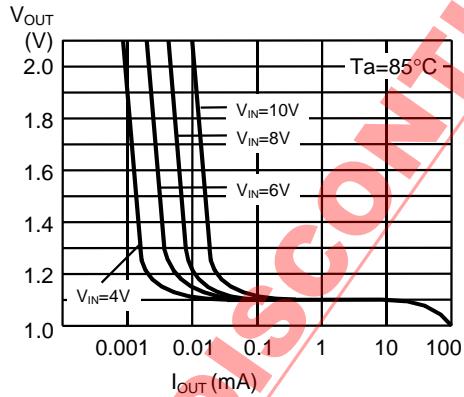

3.2 1.5V≤V_{OUT}≤2.6V

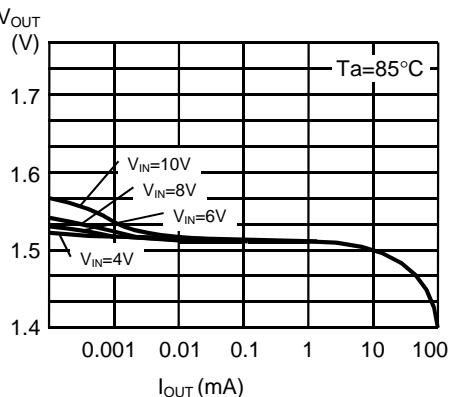


3.3 V_{OUT}≥2.7V

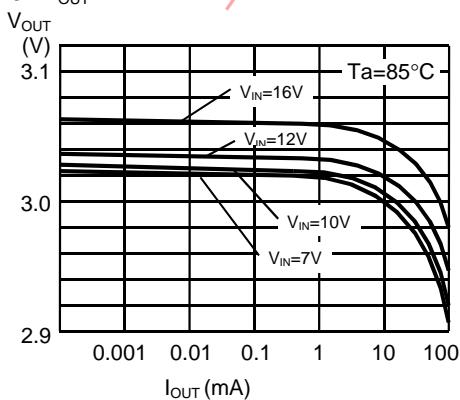


4. Input voltage - current consumption

S-81250SG series

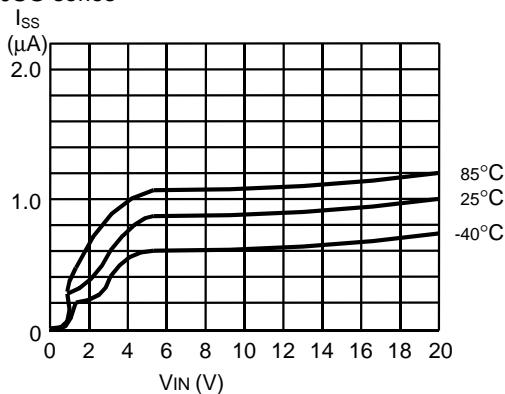


5. Temperature characteristic of output voltages

5.1 $V_{OUT} \geq 1.3$ V

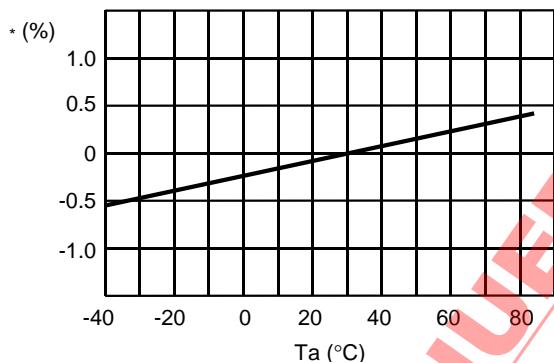

5.2 $V_{OUT} \geq 1.4$ V

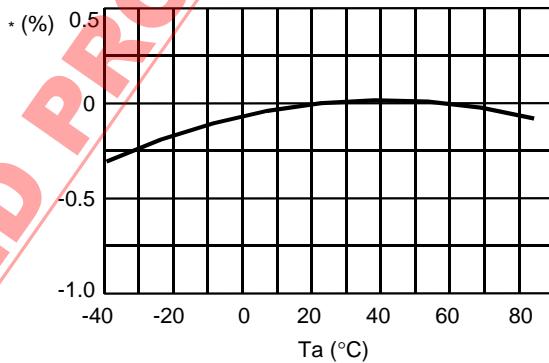


* Define with fluctuation ratio based on the output voltage at $T_a=25^\circ C$

6. I/O voltage difference characteristics


6.1 S-81211SG series

($V_{initial}$:Output voltage value at $V_{IN}=1.5$ V and $I_{OUT}=0.5$ mA)

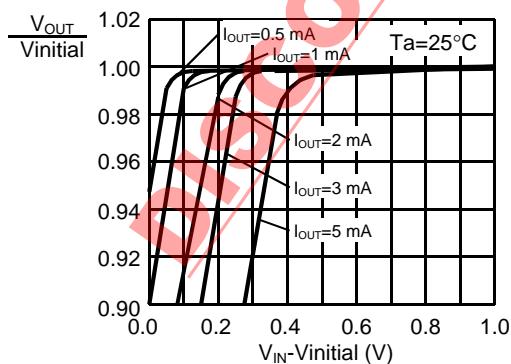

6.2 S-81215PG series

($V_{initial}$:Output voltage value at $V_{IN}=3.5$ V and $I_{OUT}=0.5$ mA)

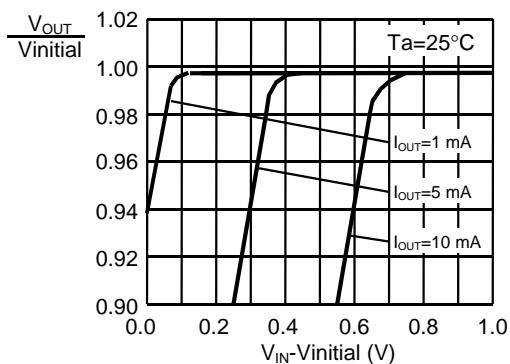


HIGH-PRECISION VOLTAGE REGULATOR

S-812XXSG Series


6.3 S-81220SG series

(Vinitial:Output voltage value at $V_{IN}=4.0$ V and $I_{OUT}=10$ mA)

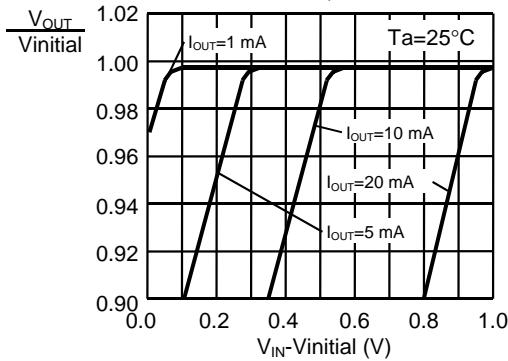


6.4 S-81225SG series

(Vinitial:Output voltage value at $V_{IN}=4.5$ V and $I_{OUT}=10$ mA)

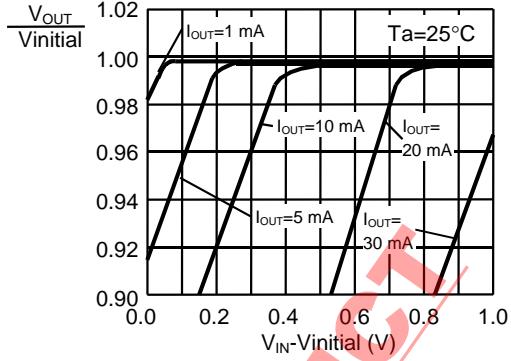


6.5 S-81230SG series

(Vinitial:Output voltage value at $V_{IN}=5.0$ V and $I_{OUT}=10$ mA)

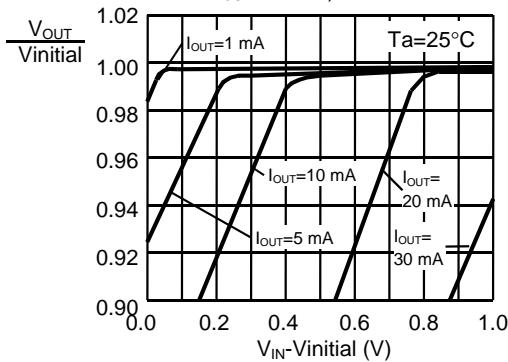


6.6 S-81235SG series

(Vinitial:Output voltage value at $V_{IN}=5.5$ V and $I_{OUT}=10$ mA)

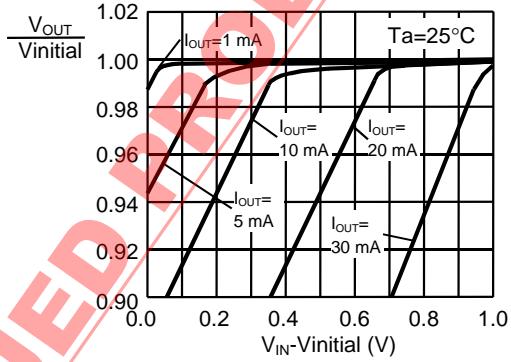


6.7 S-81240SG series

(Vinitial:Output voltage value at $V_{IN}=6.0$ V and $I_{OUT}=10$ mA)

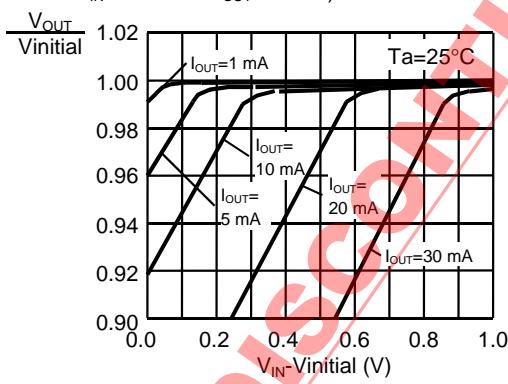


6.8 S-81245SG series

(Vinitial:Output voltage value at $V_{IN}=6.5$ V and $I_{OUT}=10$ mA)

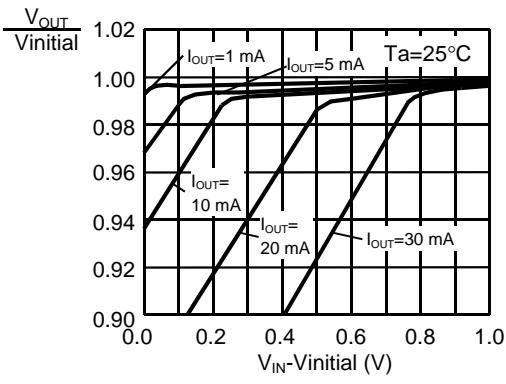


6.9 S-81250PG series

(Vinitial:Output voltage value at $V_{IN}=7.0$ V and $I_{OUT}=10$ mA)

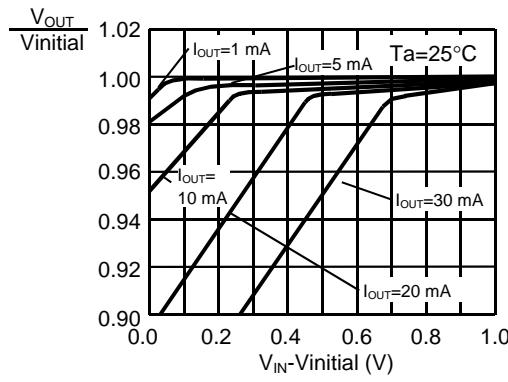


7. Temperature characteristic of I/O voltage difference


7.1 S-81211SG series

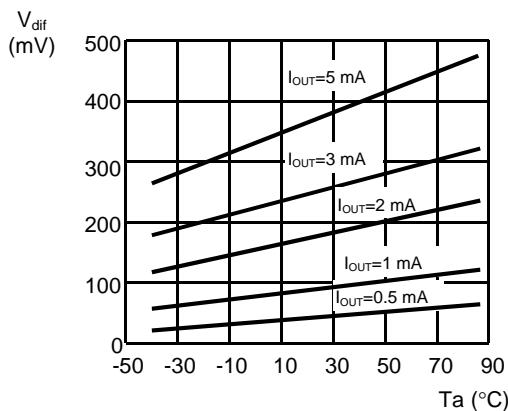


7.2 S-81215SG series

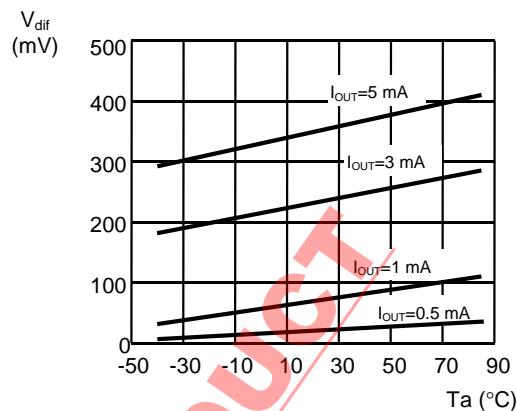


7.3 S-81220SG series

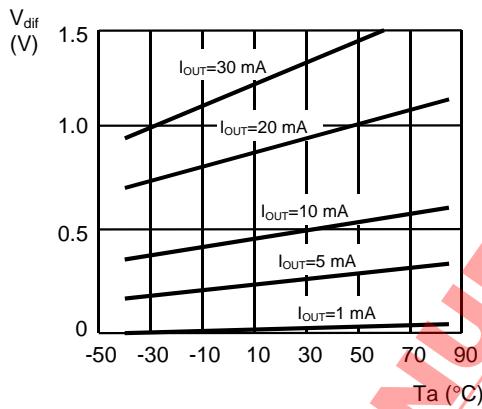


7.4 S-81225SG series

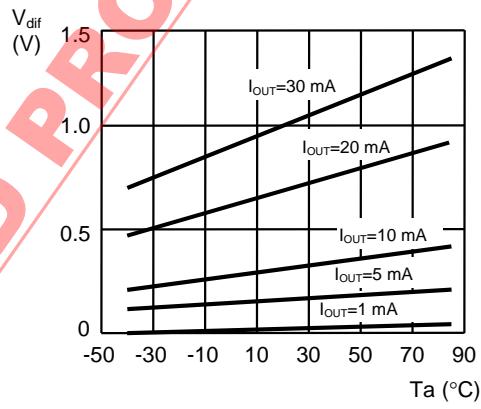

7.5 S-81230SG series

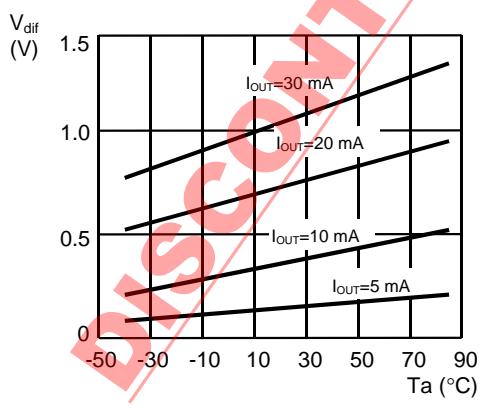


7.6 S-81235SG series

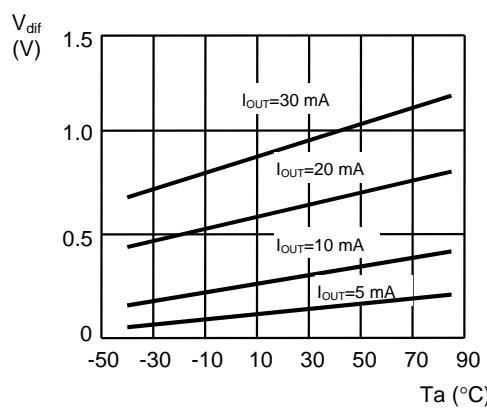


HIGH-PRECISION VOLTAGE REGULATOR S-812XXSG Series


7.7 S-81240SG series

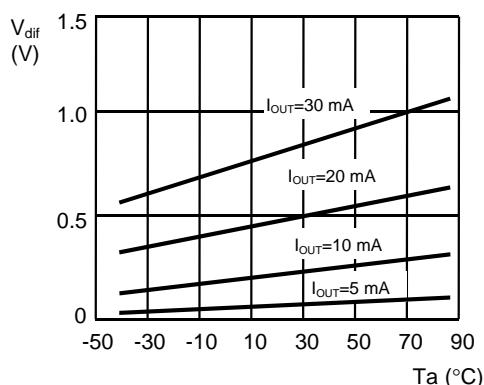

7.8 S-81245SG series

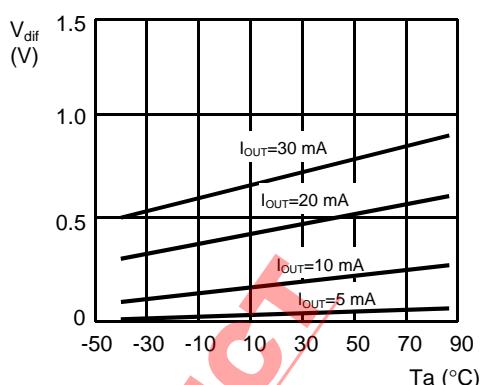


7.9 S-81250SG series

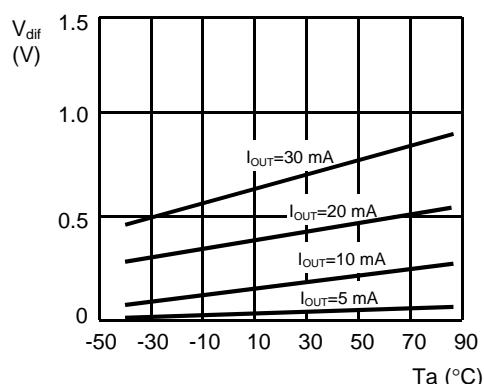


■ Measuring Circuits

1. Input voltage - output voltage

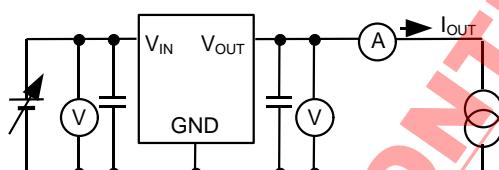

2. Output current - output voltage

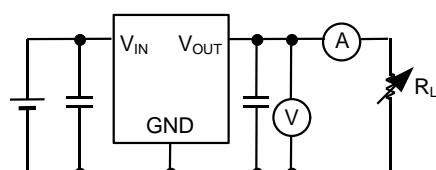

3. Current consumption

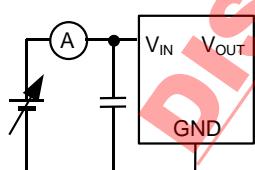



Figure 21

■ TO-92

YF003-A 990531


●Dimensions

(1)Loose

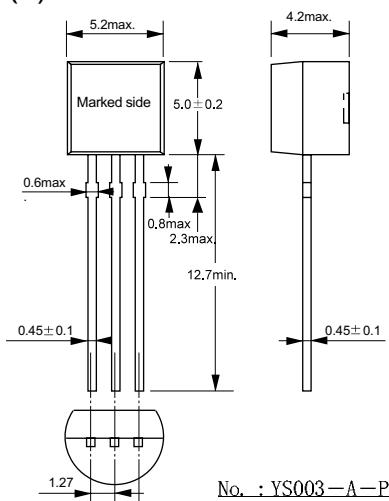


No. : YF003-A-P-SD-1. 0

(2)Taped (reel/zigzag)

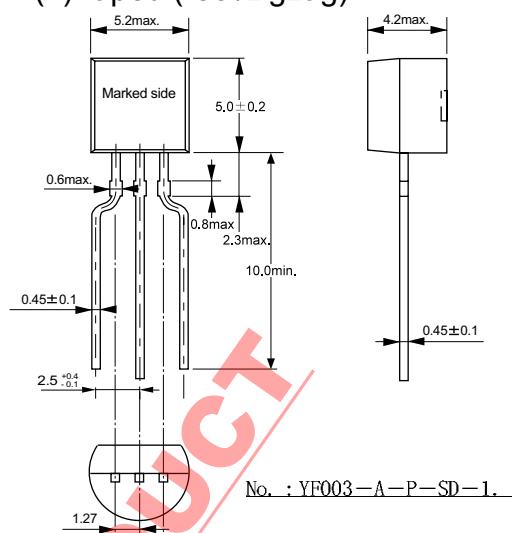

No. : YF003-A-P-SD-1. 0


●Taping Specifications

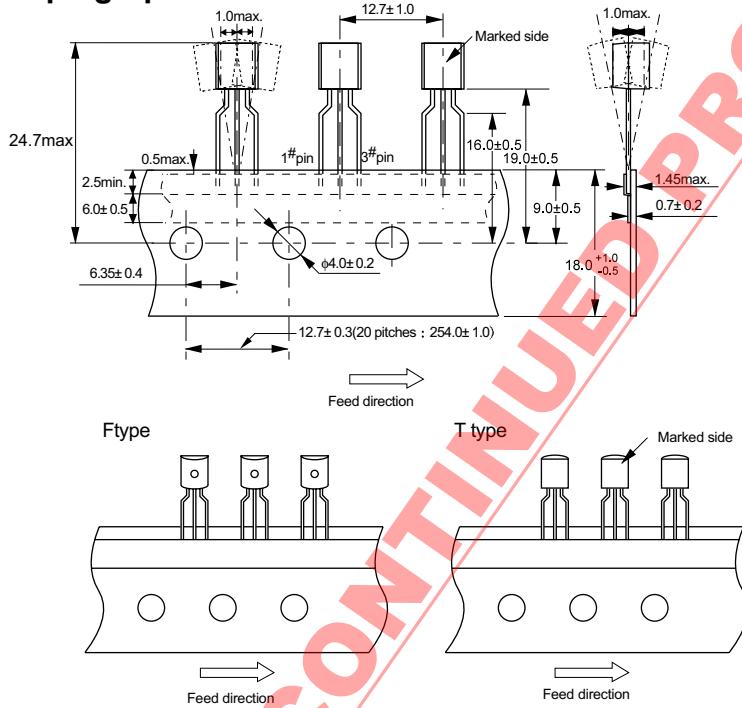



No. : YF003-A-C-SD-1. 0

●Switch-back(wrap) Specifications

Side Spacer


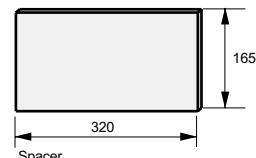


Spacer

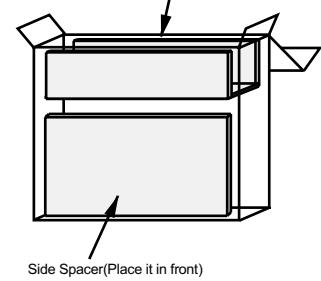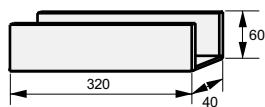

Side Spacer(Place it in front)


Leave enough space to accommodate 4 components.

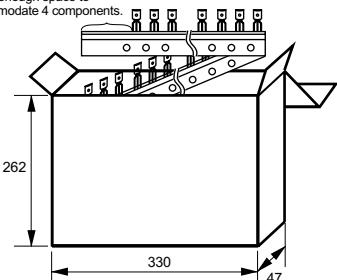


No. : YF003-A-Z-SD-1. 0

●Reel Specifications

1 reel holds 2000 ICs.

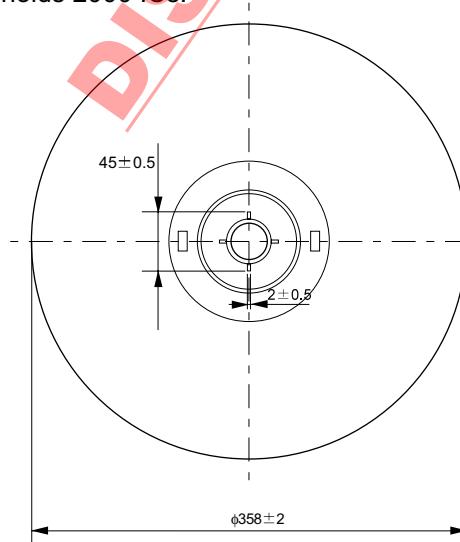

No. : YF003-A-R-SD-1. 0

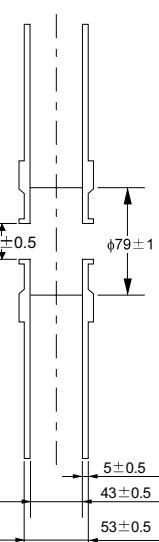


SOT-23-5

MP005-A 990531



Unit : mm

Dimensions

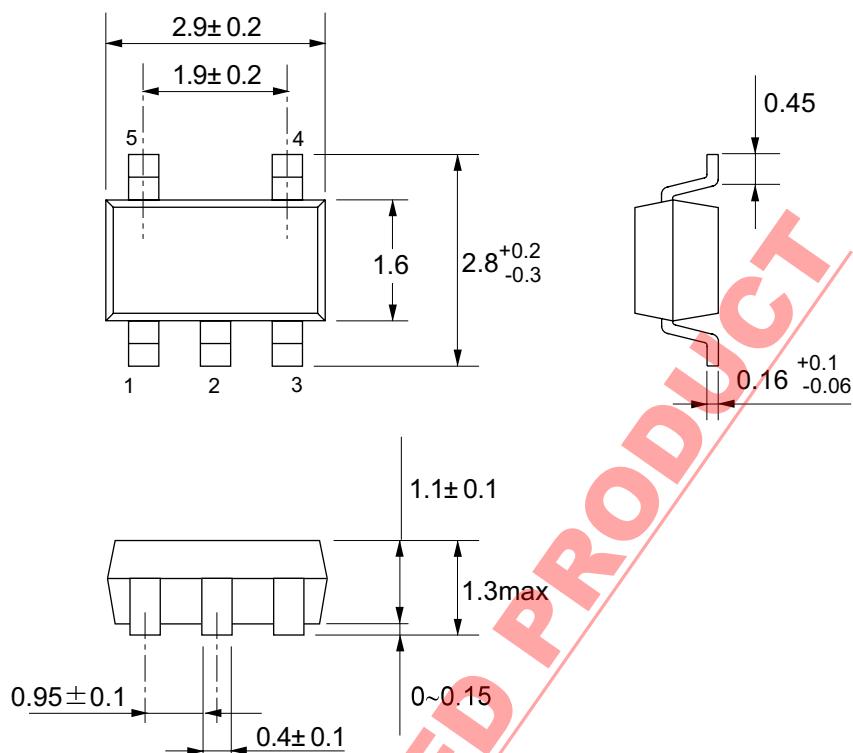

No. : MP 0 0 5 - A - P - S D - 1 . 0


Taping Specifications

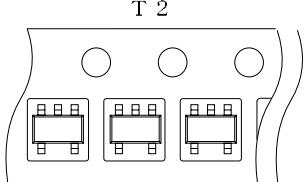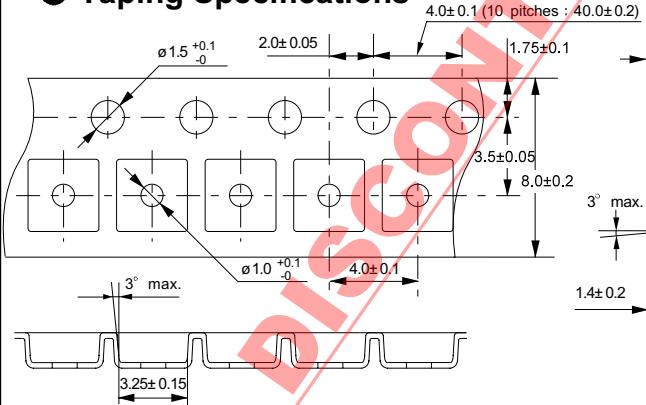

Feed direction →

Reel Specifications

1 reel holds 3000 ICs.

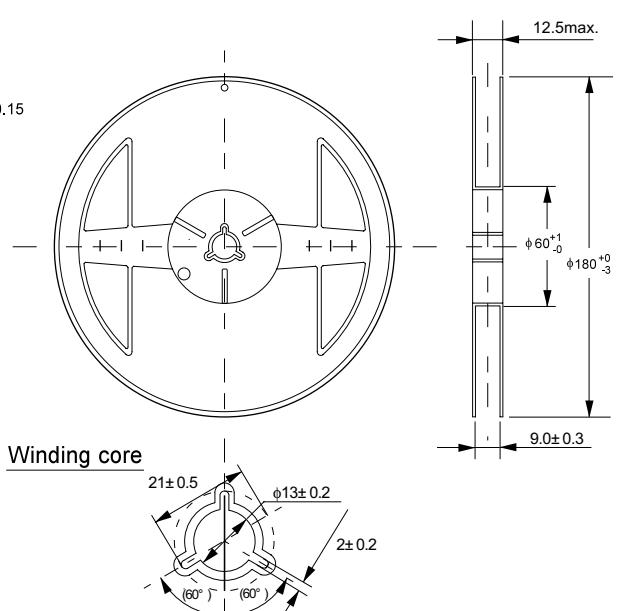

No. : MP 0 0 5 - A - R - S D - 1 . 0


No. : MP 0 0 5 - A - C - S D - 1 . 0

SOT-89-3

UP003-A 990531



Dimensions

Unit:mm

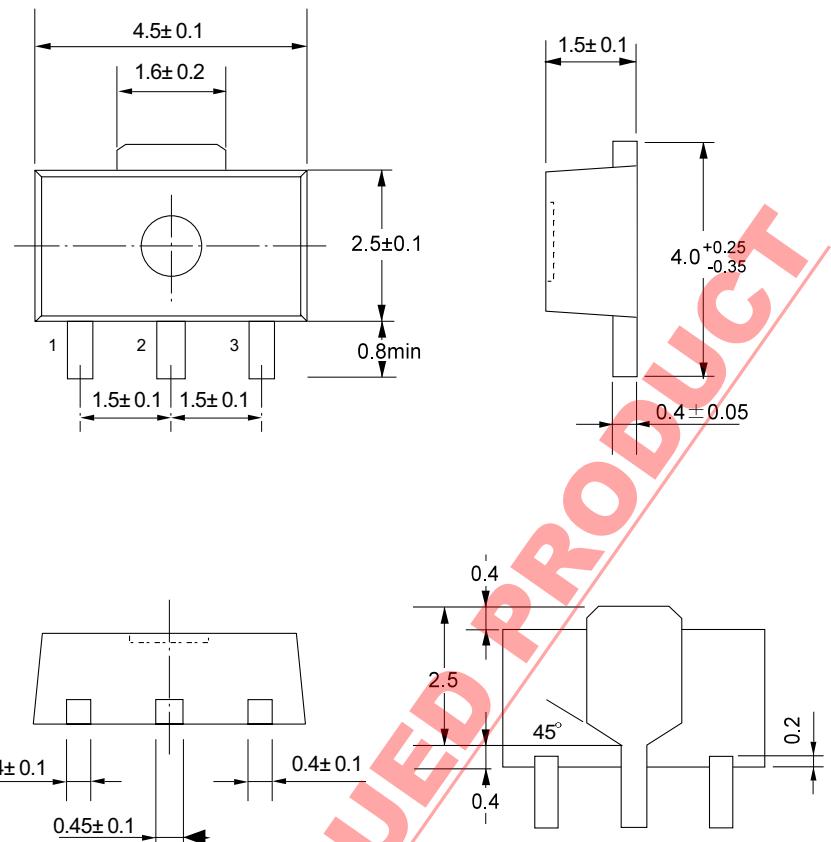

No. : UP 0 0 3 - A - P - S D - 1 . 0


Taping Specifications

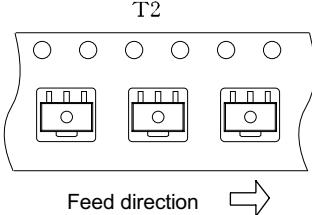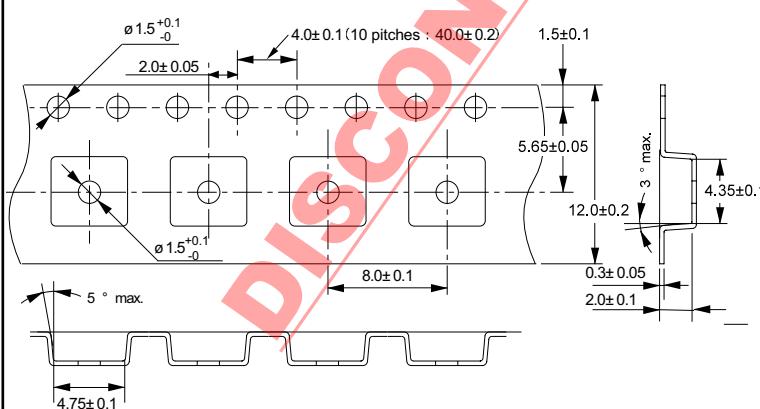


No. : UP 0 0 3 - A - C - S D - 1 . 0

Reel Specifications

1 reel holds 1000 ICs.

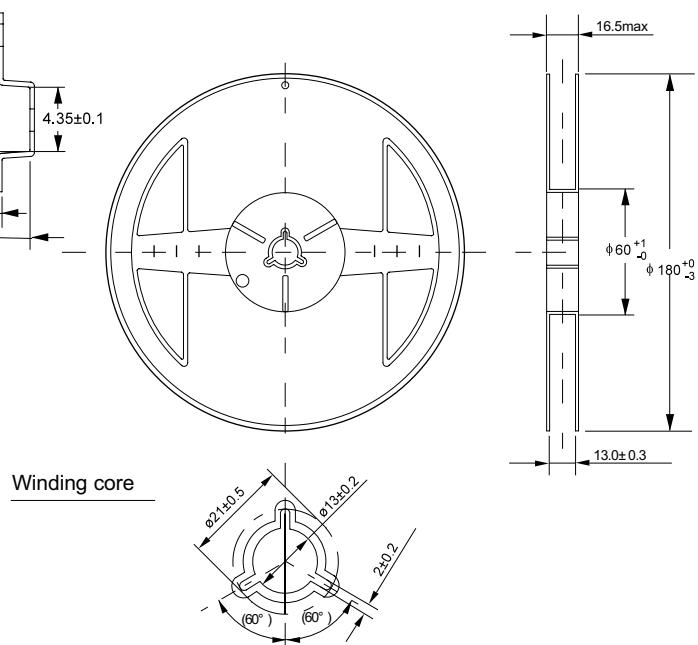


No. : UP 0 0 3 - A - R - S D - 1 . 0

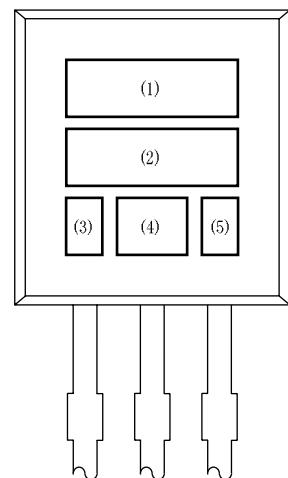● TO-92


- (1) to (2) : Product name
- (3) : Year of assembly
- (4) : Month and week of assembly
- (5) : Wafer lot No. (last digit)

No. : YF 0 0 3 - A - M - S 1 - 1 . 0

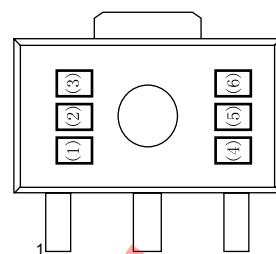● SOT-89-3

- (1) to (3) : Product name (abbreviation)
- (4) : Year of assembly
- (5) : Month of assembly
- (6) : Week of assembly

No. : UP 0 0 3 - A - M - S 1 - 1 . 0

● SOT-23-5

- (1) (2) : Product name (abbreviation)
- (3) : Month of assembly
- (4) : Dot on one side
(Year and week of assembly)

No. : MP 0 0 5 - A - M - S 1 - 1 . 0

DISCONTINUED PRODUCT

- The information herein is subject to change without notice.
- Seiko Instruments Inc. is not responsible for any problems caused by circuits or other diagrams described herein whose industrial properties, patents or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee any mass-production design.
- When the products described herein include Strategic Products (or Service) subject to regulations, they should not be exported without authorization from the appropriate governmental authorities.
- The products described herein cannot be used as part of any device or equipment which influences the human body, such as physical exercise equipment, medical equipment, security system, gas equipment, vehicle or airplane, without prior written permission of Seiko Instruments Inc.