

SPECIFICATIONS

Mechanical

Contact Normal Force: 75g min.
Durability: 100 Cycles
Contact Retention Force: 0.45kg min.


Electrical

Current Rating: 1.0A, 30 Rise above Ambient
Contact Resistance: 40mW max. initial, 50mW max. after Test
Dielectric Withstand Voltage: 500V min. at Sea Level
Pin to Pin Insulation Resistance: 800MW min.


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Storage Temperature Range: -55 to +105

EH Series
Right Angle, Press-fit Type
1.27mm [.050"] Pitch
184 Pos.

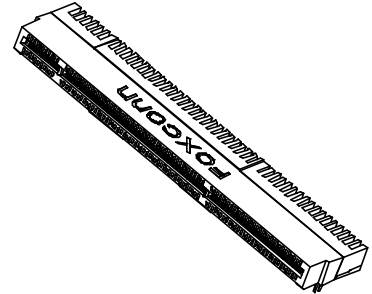

DRAWING

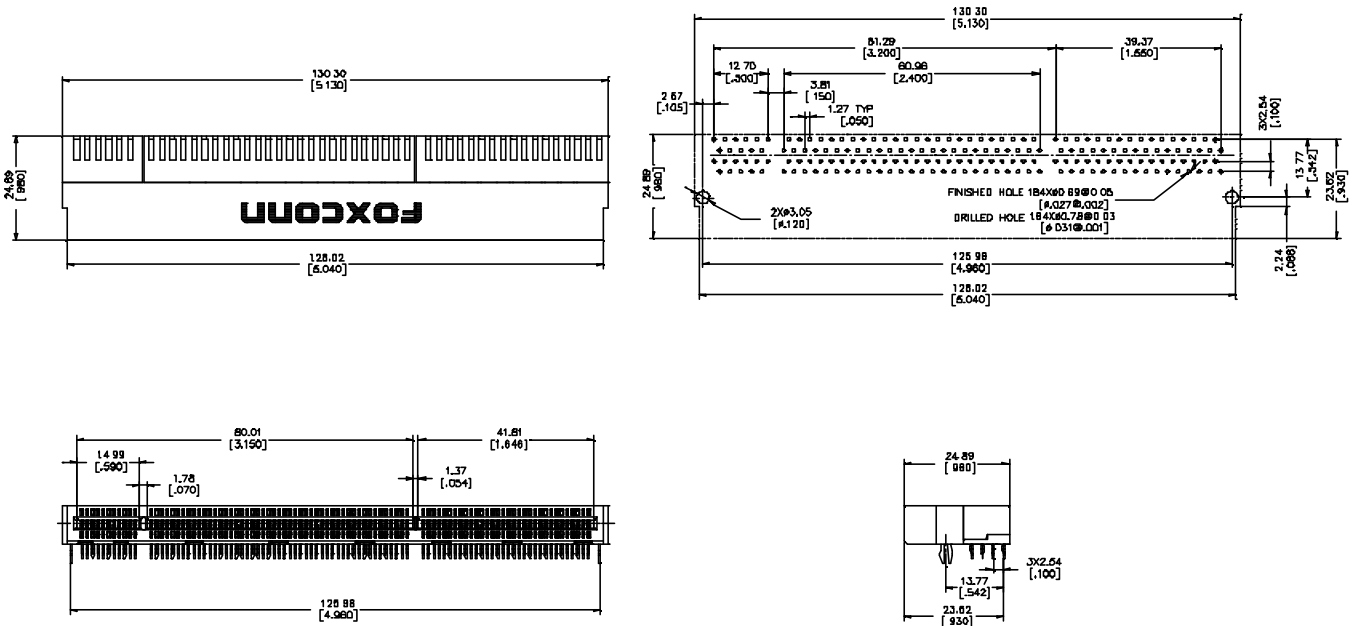

ORDERING INFORMATION

PRODUCT NO: EH 8 92 * * - 2 P D - **

