

# Straight through hole type male connector for PCB LPC-( ) (T ) M ( )

2 mm pitch connector

For PCB

Straight Through hole

RoHS




● Configuration of product Part No.

## LPC- ( ) (T ) M ( )

①      ②      ③      ④

- ① Series name
- ② No. of contacts: 1–30
- ③ Length No. of contact:  
Refer to the table of dimensions below.
- ④ Contact plating  
+S: Tin plate  
G : Gold plate

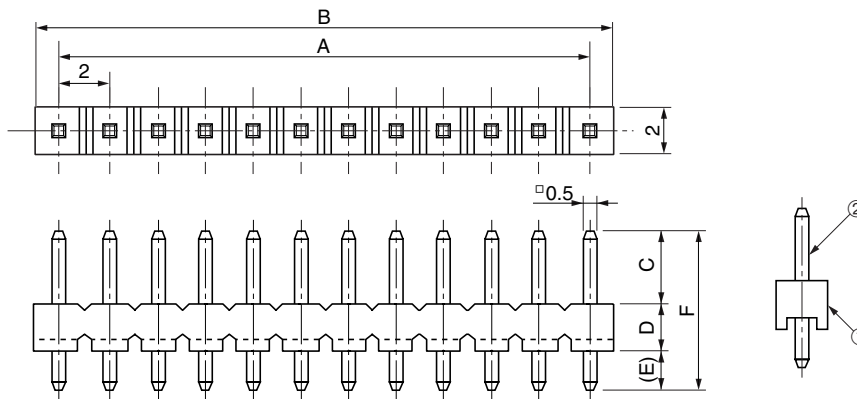

● Dimensions

Part No.	A	B	Part No.	A	B	Part No.	A	B
LPC-1(T)M( )	–	2	LPC-11(T)M( )	20	22	LPC-21(T)M( )	40	42
LPC-2(T)M( )	2	4	LPC-12(T)M( )	22	24	LPC-22(T)M( )	42	44
LPC-3(T)M( )	4	6	LPC-13(T)M( )	24	26	LPC-23(T)M( )	44	46
LPC-4(T)M( )	6	8	LPC-14(T)M( )	26	28	LPC-24(T)M( )	46	48
LPC-5(T)M( )	8	10	LPC-15(T)M( )	28	30	LPC-25(T)M( )	48	50
LPC-6(T)M( )	10	12	LPC-16(T)M( )	30	32	LPC-26(T)M( )	50	52
LPC-7(T)M( )	12	14	LPC-17(T)M( )	32	34	LPC-27(T)M( )	52	54
LPC-8(T)M( )	14	16	LPC-18(T)M( )	34	36	LPC-28(T)M( )	54	56
LPC-9(T)M( )	16	18	LPC-19(T)M( )	36	38	LPC-29(T)M( )	56	58
LPC-10(T)M( )	18	20	LPC-20(T)M( )	38	40	LPC-30(T)M( )	58	60

Part No.	C	D	(E)	F	Part No.	C	D	(E)	F
LPC-( )M( )	3	2	2.6	7.6	LPC-( )T13M( )	12.4	2	2.6	17
LPC-( )T1M( )		3.4	2.7	9.1	LPC-( )T14M( )	3		5	10
LPC-( )T3M( )		1.65	6.65	LPC-( )T15M( )	15.2	2.6		19.8	
LPC-( )T4M( )	4.5	9.5	LPC-( )T16M( )	3	9.6	14.6			
LPC-( )T5M( )	8	2.6	12.6	LPC-( )T18M( )	3	1.8		6.8	
LPC-( )T6M( )	7.5		12.1	LPC-( )T19M( )	8.5	2.5		13	
LPC-( )T7M( )	4	2.5	8.5	LPC-( )T20M( )	3.5	1.5		9.5	
LPC-( )T8M( )	5.5			1	LPC-( )T21M( )				6
LPC-( )T9M( )	8	2	12	LPC-( )T22M( )	13.6	2.5		18.1	
LPC-( )T10M( )	9	2.6	13.6	LPC-( )T23M( )	5.4	2.6		10	
LPC-( )T12M( )	10		14.6						

\*See note #1

\*Note #1: for 16 contacts or less

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

● Components

①	Insulator
②	Contacts

Mating connectors: LPC series female connectors or shunt plugs