

# 3M™ Pak 50 Boardmount Plug

.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series



- Contact design features two contact points and straight beam construction for connector reliability and low insertion force
- Retention clip secures connector for wave soldering eliminating additional hardware expenses
- Horizontal, parallel or vertical mating available
- Insulator design prevents miss-insertion errors and contact damage
- Available with or without flanges
- RoHS\* compliant

Date Modified: December 8, 2006

TS-2046-04  
Sheet 1 of 6

---

## Physical

### Insulation

Material: Glass Filled Nylon  
Flammability: UL 94V-0  
Color: Black

### Contact

Material: Phosphor Bronze

### Plating

Underplating: Nickel  
Wiping Area: 10  $\mu$ " [ 0.25  $\mu$ m ] Gold  
Solder Tails: Gold Flash  
Retaining Clips: Tin Copper

---

## Electrical

**Current Rating:** 0.5 A  
**Insulation Resistance:**  $> 1 \times 10^9 \Omega$  at 500 V<sub>DC</sub>  
**Withstanding Voltage:** 500 Vrms at Sea Level

---

## Environmental

**Temperature Rating:** -55°C to +85°C  
**Process Rating:** 260°C (per J-STD-020C)

"RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.

UL File No.: E68080

# 3M™ Pak 50 Boardmount Plug

.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series

Straight with Flanges. With or Without Retention Clips


**Product Table / Dimensions**

Contact Quantity	A	B	C	D
20	25.43	20.32	15.83	11.43
	[1.001]	[0.800]	[0.623]	[0.450]
26	29.24	24.13	19.64	15.24
	[1.151]	[0.950]	[0.773]	[0.600]
30	31.78	26.67	22.18	17.78
	[1.251]	[1.050]	[0.873]	[0.700]
32	33.05	27.94	23.45	19.05
	[1.301]	[1.100]	[0.923]	[0.750]
34	34.32	29.21	24.72	20.32
	[1.351]	[1.150]	[0.973]	[0.800]
40	38.13	33.02	28.53	24.13
	[1.501]	[1.300]	[1.123]	[0.950]


Contact Quantity	A	B	C	D
50	44.48	39.37	34.88	30.48
	[1.751]	[1.550]	[1.373]	[1.200]
52	45.75	40.64	36.15	31.75
	[1.801]	[1.600]	[1.423]	[1.250]
60	50.83	45.72	41.23	36.83
	[2.001]	[1.800]	[1.623]	[1.450]
68	55.91	50.80	46.31	41.91
	[2.201]	[2.000]	[1.823]	[1.650]
80	63.53	58.42	53.93	49.53
	[2.501]	[2.300]	[2.123]	[1.950]
100	76.23	71.12	66.63	62.23
	[3.001]	[2.800]	[2.623]	[2.450]

With Retention Clips

Without Retention Clips

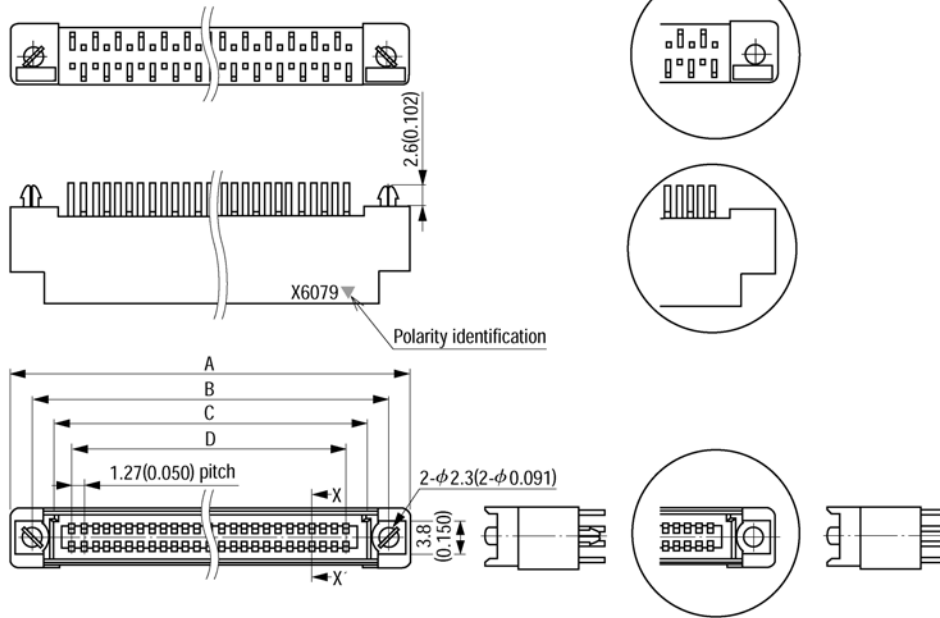

**X-X' Cross Section**

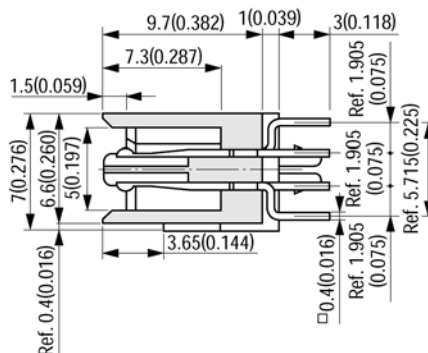

Shown with Retention Clips

TS-2046-04  
Sheet 2 of 6

# 3M™ Pak 50 Boardmount Plug




.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series

Straight, Without Flanges



**Product Table / Dimensions**

Contact Quantity	A	B	C
20	17.83	15.83	11.43
	[0.702]	[0.623]	[0.450]
26	21.64	19.64	15.24
	[0.852]	[0.773]	[0.600]
30	24.18	22.18	17.78
	[0.952]	[0.873]	[0.700]
32	25.45	23.45	19.05
	[1.002]	[0.923]	[0.750]
34	26.72	24.72	20.32
	[1.052]	[0.973]	[0.800]
40	30.53	28.53	24.13
	[1.202]	[1.123]	[0.950]

Contact Quantity	A	B	C
50	36.88	34.88	30.48
	[1.452]	[1.373]	[1.200]
52	38.15	36.15	31.75
	[1.502]	[1.423]	[1.250]
60	43.23	41.23	36.83
	[1.702]	[1.623]	[1.450]
68	48.31	46.31	41.91
	[1.902]	[1.823]	[1.650]
80	55.93	53.93	49.53
	[2.202]	[2.123]	[1.950]
100	68.63	66.63	62.23
	[2.702]	[2.623]	[2.450]

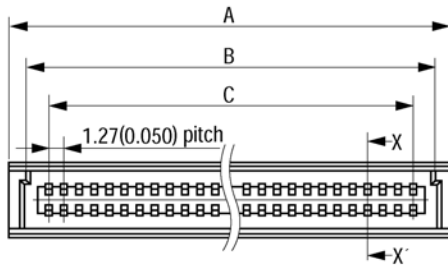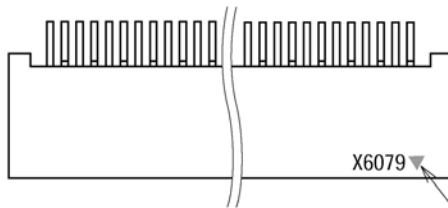

**X-X' Cross Section**

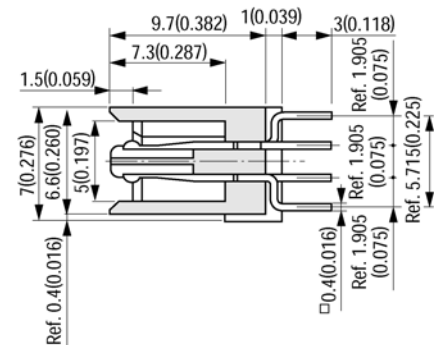

## Ordering Information

**P5X - XXXP - XXX - EA**

0 = With Flanges  
1 = Without Flanges, (offered without retention clips only)

Contact Quantity  
See Table

Solder Tail and Clip Options:  
S1 = Straight without Retention Clips  
SR1 = Right Angle without Retention Clips  
R1 = Straight with Retention Clips  
RR1 = Right Angle with Retention Clips

TS-2046-04  
Sheet 3 of 6

# 3M™ Pak 50 Boardmount Plug

.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series


Right Angle with Flanges, with or without Retention Clips

Product Table / Dimensions


Contact Quantity	A	B	C	D
20	25.43 [1.001]	20.32 [0.800]	15.83 [0.623]	11.43 [0.450]
26	29.24 [1.151]	24.13 [0.950]	19.64 [0.773]	15.24 [0.600]
30	31.78 [1.251]	26.67 [1.050]	22.18 [0.873]	17.78 [0.700]
32	33.05 [1.301]	27.94 [1.100]	23.45 [0.923]	19.05 [0.750]
34	34.32 [1.351]	29.21 [1.150]	24.72 [0.973]	20.32 [0.800]
40	38.13 [1.501]	33.02 [1.300]	28.53 [1.123]	24.13 [0.950]

Contact Quantity	A	B	C	D
50	44.48 [1.751]	39.37 [1.550]	34.88 [1.373]	30.48 [1.200]
52	45.75 [1.801]	40.64 [1.600]	36.15 [1.423]	31.75 [1.250]
60	50.83 [2.001]	45.72 [1.800]	41.23 [1.623]	36.83 [1.450]
68	55.91 [2.201]	50.80 [2.000]	46.31 [1.823]	41.91 [1.650]
80	63.53 [2.501]	58.42 [2.300]	53.93 [2.123]	49.53 [1.950]
100	76.23 [3.001]	71.12 [2.800]	66.63 [2.623]	62.23 [2.450]


With Retention Clips

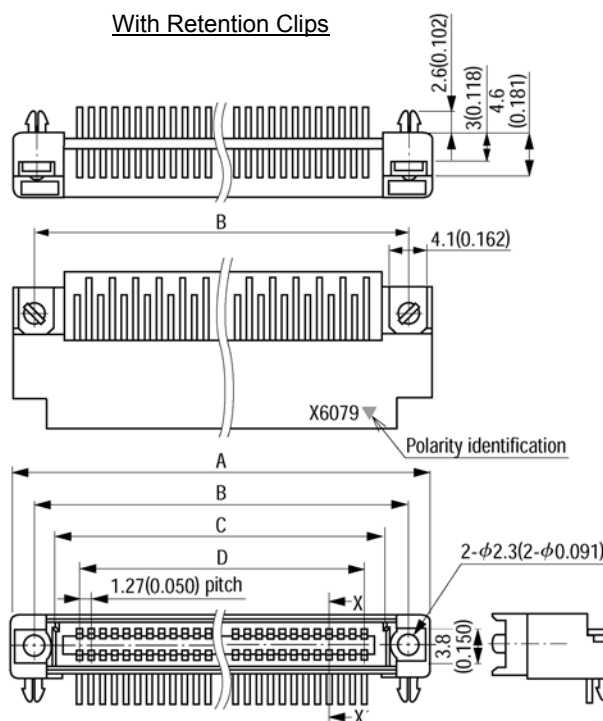

Without Retention Clips

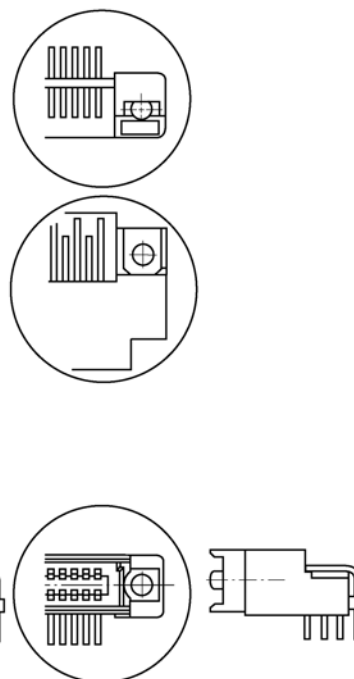

X-X' Cross Section

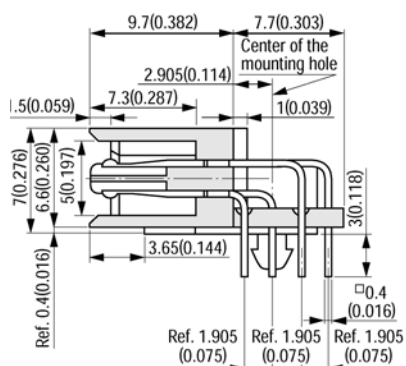

Shown with Retention Clips

TS-2046-04  
Sheet 4 of 6

# 3M™ Pak 50 Boardmount Plug


.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series

Right Angle without Flanges


Product Table / Dimensions

Contact Quantity	A	B	C
20	17.83	15.83	11.43
	[0.702]	[0.623]	[0.450]
26	21.64	19.64	15.24
	[0.852]	[0.773]	[0.600]
30	24.18	22.18	17.78
	[0.952]	[0.873]	[0.700]
32	25.45	23.45	19.05
	[1.002]	[0.923]	[0.750]
34	26.72	24.72	20.32
	[1.052]	[0.973]	[0.800]
40	30.53	28.53	24.13
	[1.202]	[1.123]	[0.950]

Contact Quantity	A	B	C
50	36.88	34.88	30.48
	[1.452]	[1.373]	[1.200]
52	38.15	36.15	31.75
	[1.502]	[1.423]	[1.250]
60	43.23	41.23	36.83
	[1.702]	[1.623]	[1.450]
68	48.31	46.31	41.91
	[1.902]	[1.823]	[1.650]
80	55.93	53.93	49.53
	[2.202]	[2.123]	[1.950]
100	68.63	66.63	62.23
	[2.702]	[2.623]	[2.450]

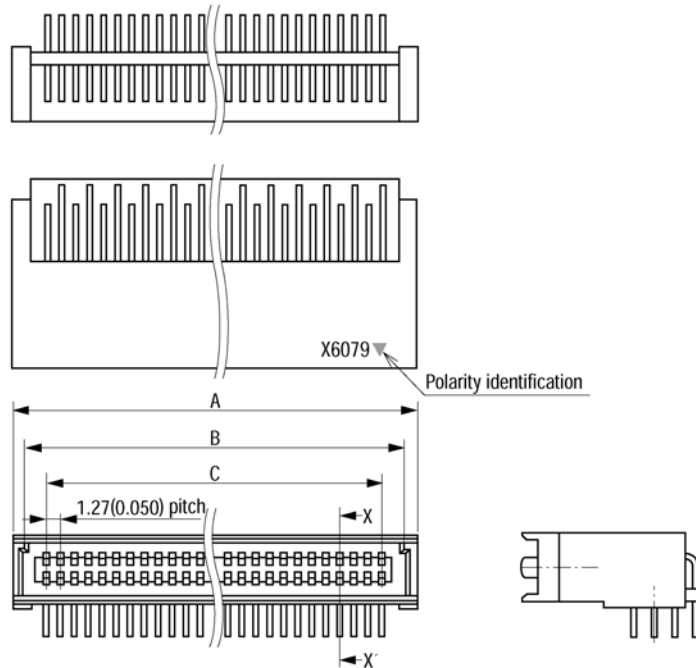

X-X' Cross Section

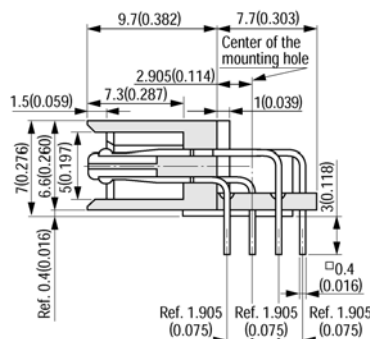


TS-2046-04  
Sheet 5 of 6

# 3M™ Pak 50 Boardmount Plug


.050" Through-Hole, Straight and Right Angle, With Ret. Clips, Flng. Option P50 Series

## Printed Circuit Board Layout (Component Side View)

### STRAIGHT WITH FLANGES (with and without Retention Clips)

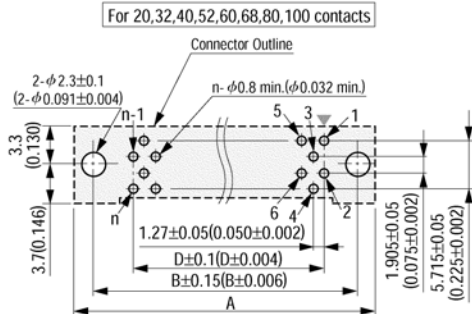


For 26,30,34,50 contacts

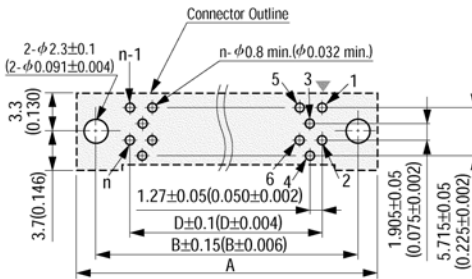


### STRAIGHT WITHOUT FLANGES

For 20,32,40,52,60,68,80,100 contacts

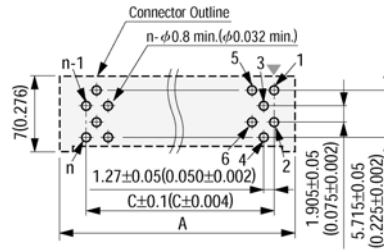

For 26,30,34,50 contacts

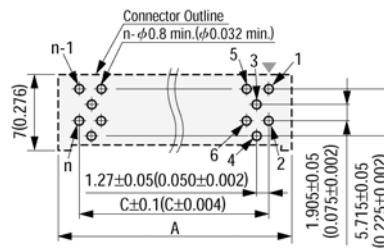


▼=Polarity identification

Recommended PCB Thickness  $t = 1.6 \pm 0.19 (0.063 \pm 0.007)$


\*"n" is number of contacts.

### RIGHT ANGLE WITH FLANGES (with and without Retention Clips)

For 20,32,40,52,60,68,80,100 contacts

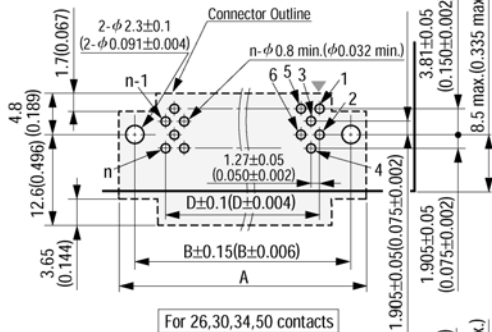


For 26,30,34,50 contacts

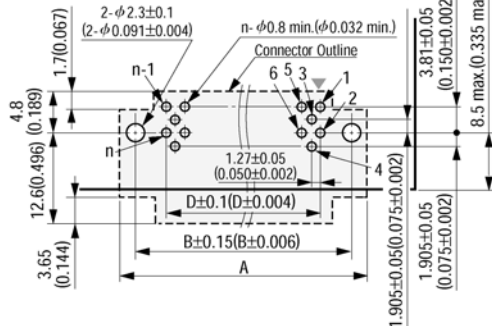


### RIGHT ANGLE WITHOUT FLANGES

For 20,32,40,52,60,68,80,100 contacts

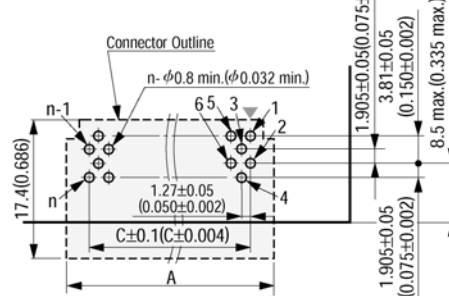

For 26,30,34,50 contacts

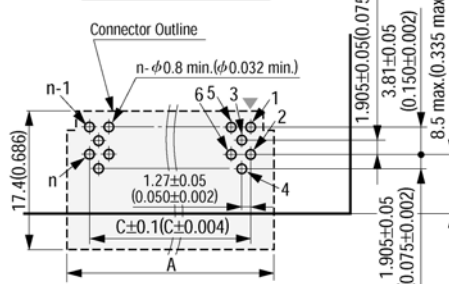

TS-2046-03  
Sheet 6 of 6

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



### 3M Electronics

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/225-5373  
[www.3M.com/electronics](http://www.3M.com/electronics)

## Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Minimum 10%  
Post-Consumer Fiber

Printed in USA.

© 3M 2006