


1N3611GP thru 1N3614GP and 1N3957GP

Glass Passivated Junction Rectifier
Reverse Voltage 200 to 1000V
Forward Current 1.0A

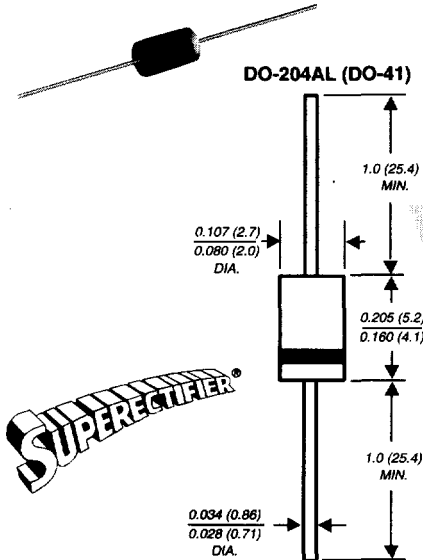

NOTE: Lead diameter is $\frac{0.026 (0.66)}{0.023 (0.58)}$ for suffix "E" part numbers

Dimensions in inches and (millimeters)

*Glass-plastic encapsulation technique is covered by Patent No. 3,996,602, and brazed-lead assembly by Patent No. 3,930,306

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Capable of meeting environmental standards of MIL-S-19500
- Cavity-free glass passivated junction
- 1.0 Ampere operation at $T_A = 75^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AL, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	1N 3611GP	1N 3612GP	1N 3613GP	1N 3614GP	1N 3957GP	UNIT
* Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
* Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
* Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	A
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0					A
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30					A
Typical thermal resistance (NOTE 1)	$R_{\theta JA}$	55					$^\circ\text{C}/\text{W}$
	$R_{\theta JL}$	25					
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175					$^\circ\text{C}$

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	1N 3611GP	1N 3612GP	1N 3613GP	1N 3614GP	1N 3957GP	UNIT
Maximum instantaneous forward voltage at 1.0A	V_F	1.0					V
* Maximum DC reverse current at rated DC blocking voltage	I_R	1.0 300					μA
Typical reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$	t_{rr}	2.0					μs
Typical junction capacitance at 4.0V, 1MHz	C_J	8.0					pF

NOTES:

- (1) Thermal resistance from junction to ambient and from junction to lead at $0.375"$ (9.5mm) lead length, P.C.B. mounted
*JEDEC registered values

1N3611GP thru 1N3614GP and 1N3957GP

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING

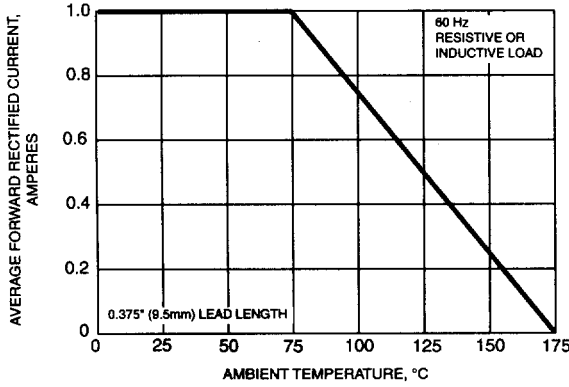


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

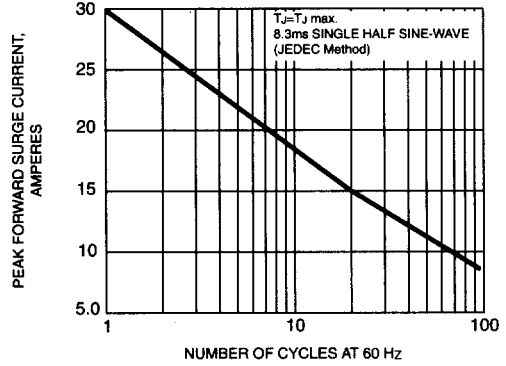


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

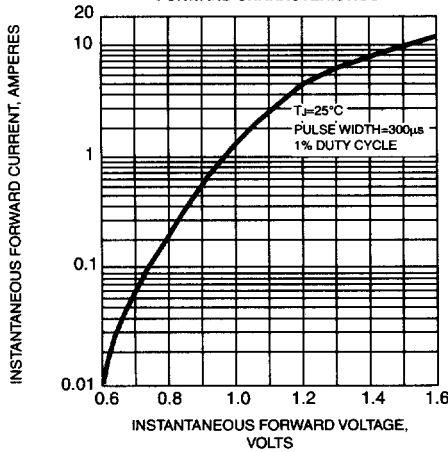


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

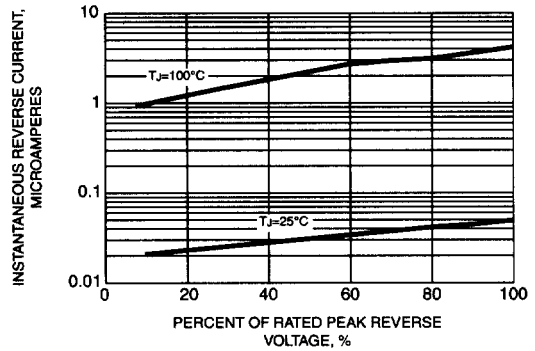


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


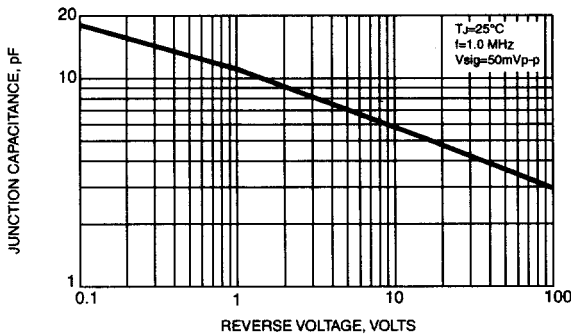


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

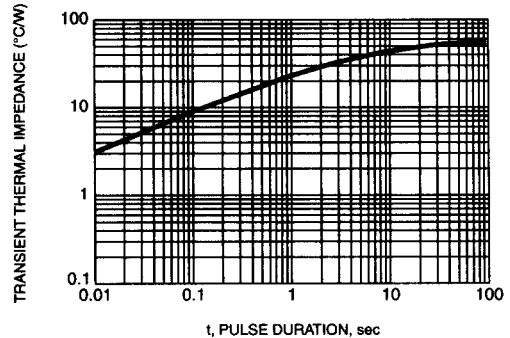

Standard