






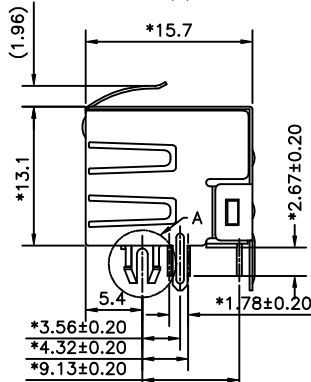

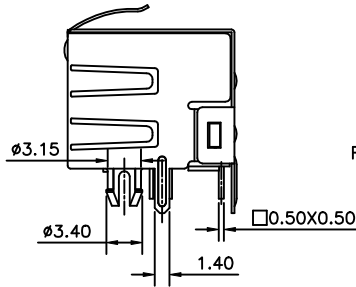
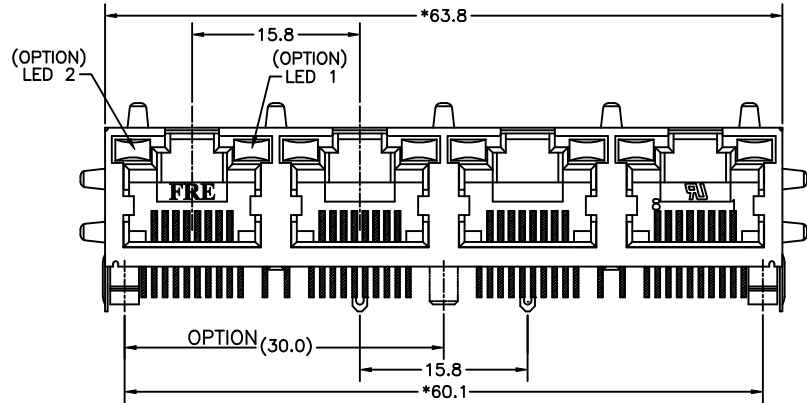


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

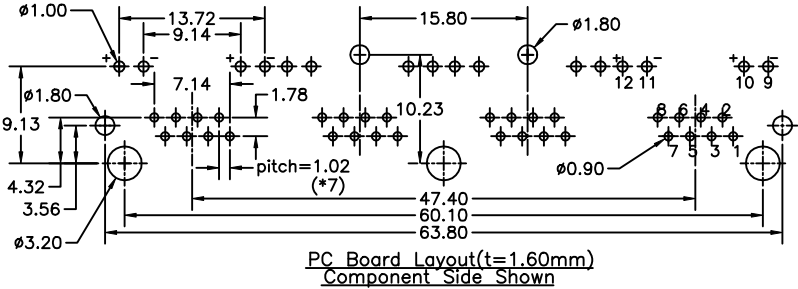

- NOTES:
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
 - LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM
 - OPERATING: 750 CYCLES MIN.

- MECHANICAL:**
- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
 - BACK PLATE MATERIAL : FR52 COLOR-BLACK.
 - LED SIZE : 3.2*2.0*7.0*P=2.54mm.
 - SHIELD MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
 - CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS OR 0.046mm.
 - PLATING : GOLD PLATING OVER NICKEL.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.

- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265°C(5~10SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F. CUL FILE No:E163191

- 1-LED1:GREEN ,LED2:YELLOW
2-LED1:GREEN ,LED2:GREEN
3-LED1:YELLOW ,LED2:GREEN
4-LED1:G+Y ,LED2:G+Y
5-LED1:RED ,LED2:GREEN
7-LED1:YELLOW ,LED2:YELLOW
D-LED1:G+R ,LED2:G+R
E-LED1:GREEN ,LED2:RED
N-LED1:GREEN ,LED2:G+Y
P-LED1:Y+R ,LED2:GREEN
Q-LED1:G+Y ,LED2:G+R
S-LED1:Y+R ,LED2:Y+R
V-LED1:Y+G ,LED2:Y+G
K-LED1:G+Y ,LED2:GREEN

- PLATING: 1-3u" 2-6u"
3-15u" 4-30u" 5-50u"
- J1- W/O LOGO,PLATE Tin SHIELD,STAMP PIN
J2- W/O LOGO,PLATE Ni SHIELD,STAMP PIN
J3- W/O LONG,PLATE Tin SHIELD,ROUND PIN
J4- W/O LONG,PLATE Ni SHIELD,ROUND PIN
65- W/FRE+UL LOGO,PLATE Ni SHIELD,STAMP PIN,FR52
- 4-4 PORTS W/O MIDDLE POLE
C-4 PORTS W/ MIDDLE POLE
- 0-NO SHIELD
1-NO TAB 2-TOP TABS.
3-SIDE TABS.
4-TOP TABS & SIDE TABS.

DETACHED LISTS

MM (INCH)		DFTO YANGLAN	DATE 08/27/05'	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD:JAKE	DATE:2005/08/27		
		MFO	DATE		
		APPVL:LUHENG	DATE:2005/08/27		
MM				TITLE	
.0 ± 0.20				RJ45 SIDE ENTRY LED GANG JACK 4 PORTS	
.00 ± 0.15				DRAWING NO. GE5J3017-LA	
.000 ± 0.075				/PART NO. SEE NOTE	
ANGLES ±		MATERIAL :		SIZE REV	
		QT*Y :		A3 0	
		FINISH :		DO NOT SCALE DRAWING	
		SCALE : 2:1		SHEET 1 OF 1	
THIRD ANGLE PROJECTION					