

Product Specifications



F1-PNMMU

FSJ1-50A Jumper with interface types N Male and Mini UHF Male, variable length



CHARACTERISTICS


General Specifications

| | |
|-------------------------|--|
| Body Style, Connector A | Straight |
| Body Style, Connector B | Straight |
| Cable Family | FSJ1-50A |
| Interface, Connector A | N Male |
| Interface, Connector B | Mini UHF Male |
| Variable Length | For custom lengths contact 1-800-255-1479 (North America), 1-779-435-6500 (International), or an Andrew representative |

Electrical Specifications

| | |
|------------------|-----------|
| DTF, Connector A | -28.00 dB |
| DTF, Connector B | -10.00 dB |

Jumper Assembly Sample Label

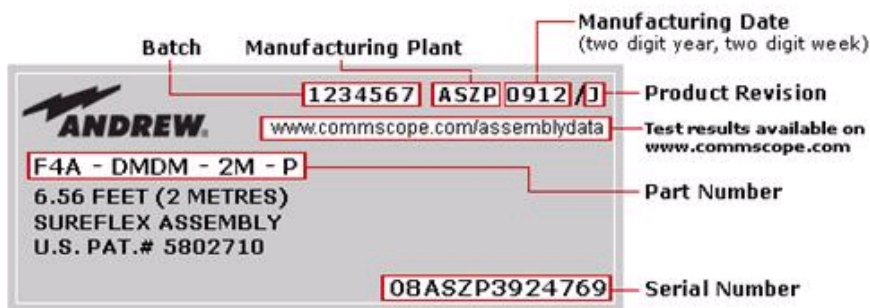

Regulatory Compliance/Certifications

| | |
|----------------------------|--|
| Agency | Classification |
| RoHS 2002/95/EC | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |
| ISO 9001:2008 | Designed, manufactured and/or distributed under this quality management system |

www.commscope.com/andrew

Product Specifications

F1-PNMMU



INCLUDED PRODUCTS



FSJ1-50A

FSJ1-50A, HELIAX® Superflexible Low Density Foam Coaxial Cable, corrugated copper, 1/4 in, black PE jacket



F1MU

Mini UHF Male for 1/4 in FSJ1-50A cable



F1PNM-HC

Type N Male for 1/4 in FSJ1-50A cable

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See www.commscope.com/andrew for the most current information.

page 2 of 2
6/9/2011