



SS24V-R/24H-R Types

Shape and Dimensions

●SS24V-R

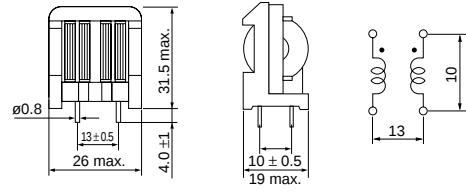

●SS24H-R

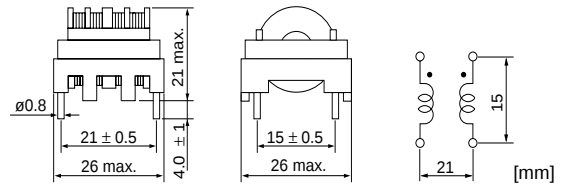

Specifications

Model	Rated Current (A)	Inductance (mH) min.	DC Resistance (Ω /line) max.	Temp. Rise (K) max.	Weight (g)	
					V approx.	H
SS24V/H-R05600	0.5	60	1.75	45	18.8	17.1
SS24V/H-R07350	0.7	35	1.0	45	19.1	17.4
SS24V/H-R08250	0.8	25	0.75	50	18.8	17.1
SS24V/H-R10170	1.0	17	0.55	45	18.6	16.9
SS24V/H-R15080	1.5	8.0	0.24	45	19.0	17.3
SS24V/H-R18060	1.8	6.0	0.21	45	18.2	16.5
SS24V/H-R20045	2.0	4.5	0.17	50	18.3	16.6

•Rated voltage: 250 VAC/VDC •Withstanding voltage: 2000 VAC, one minute between lines •Insulation resistance: At 500 VDC, more than 100 M Ω (between lines)
 •Thermal class: E (120°C) •Temperature: -25°C to T°C(T=120 – temp. rise) •Inductance measurement condition: 1 kHz, 1 V, HP-4261A at 20°C

Impedance vs. Frequency

