


**CRSH2 SERIES****SCHOTTKY BARRIER RECTIFIER  
2.0 AMPS, 20 THRU 100 VOLTS****CASE DO-15**

# Central™

## Semiconductor Corp.

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CRSH2 Series types are Schottky Barrier Rectifiers mounted in an axial lead epoxy case using a metal to silicon junction to yield a low forward voltage drop.

**MARKING: FULL PART NUMBER****MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)



	SYMBOL	CRSH2-								UNITS
		<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	<u>6</u>	<u>8</u>	<u>10</u>		
Peak Repetitive Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	V	
DC Blocking Voltage	$V_R$	20	30	40	50	60	80	100	V	
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	56	70	V	
Average Forward Current ( $T_L=75^\circ\text{C}$ )	$I_O$				2.0				A	
Peak Forward Surge Current (8.3ms)	$I_{FSM}$				50				A	
Operating and Storage Junction Temperature	$T_J, T_{stg}$				-65 to +125				$^\circ\text{C}$	
Thermal Resistance	$\theta_{JA}$				35				$^\circ\text{C/W}$	

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
$I_R$	$V_R=\text{Rated } V_{RRM}$		0.5	mA
$I_R$	$V_R=\text{Rated } V_{RRM} (T_A=100^\circ\text{C})$		20	mA
$V_F$	$I_F=2.0\text{A} (20\text{V}, 30\text{V}, 40\text{V})$		0.5	V
$V_F$	$I_F=2.0\text{A} (50\text{V}, 60\text{V})$		0.7	V
$V_F$	$I_F=2.0\text{A} (80\text{V}, 100\text{V})$		0.85	V
$C_J$	$V_R=4.0, f=1.0\text{MHz}$	170		pF

## CRSH2 SERIES

### SCHOTTKY BARRIER RECTIFIER 2.0 AMPS, 20 THRU 100 VOLTS

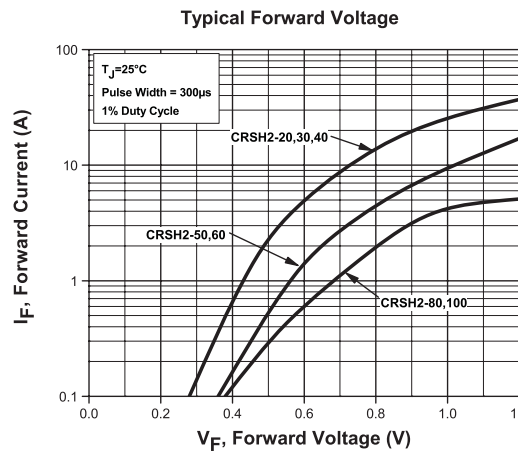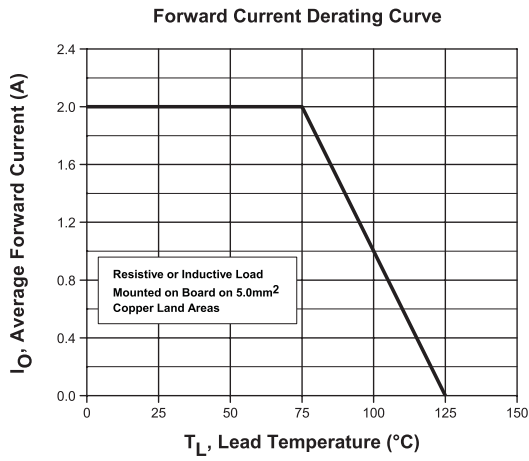

### DO-15 CASE - MECHANICAL OUTLINE

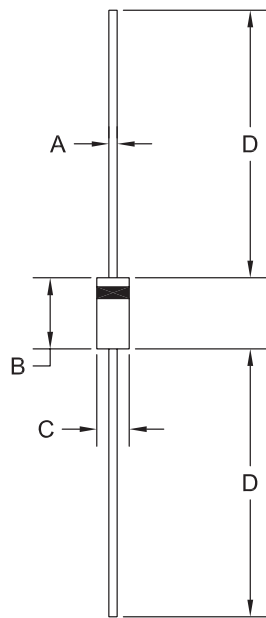

R1

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.028	0.034	0.71	0.86
B	0.230	0.300	5.84	7.62
C	0.104	0.140	2.64	3.56
D	1.000	-	25.40	-

DO-15 (REV: R1)

**MARKING: FULL PART NUMBER**

R2 (24-October 2008)