


*RoHS COMPLIANT



BOURNS®

Features

- Lead free
- RoHS compliant*
- 9 RC termination circuits to IEEE 1284 standard
- Stable thin-film-on-silicon technology
- Ultra-miniature packages to JEDEC standards

Applications


- Bidirectional parallel port communications
- Specially designed for PC/printer interface
- Ideal for space-constrained applications

Thin Film on Silicon 2CTE IEEE 1284 Terminator

General Information

The IEEE 1284 Terminator is used to provide filtering and pull-up termination on bidirectional, high-speed parallel ports connecting computer to printer. These Silicon-based, Tantalum-Nitride resistors and capacitors feature excellent stability, temperature coefficients and tracking performance. This product series conforms to JEDEC standards.


Package Schematic

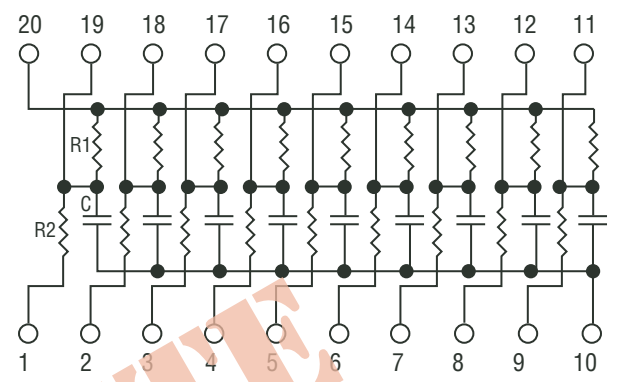

Electrical & Environmental Characteristics

| Electrical Characteristics | Symbol | Minimum | Nominal | Maximum | Unit |
|--------------------------------------|------------------|---------|---------|---------|------|
| Resistance Range | R | 10 | | 4.7K | Ω |
| Resistor Tolerance | | | ±10 % | | Ω |
| Power Rating per Resistor @ 70 °C | | | | 0.1 | Watt |
| Capacitor Range | C | 33 | | 220 | pF |
| Capacitor Tolerance | | | ±20 % | | pF |
| Capacitor Breakdown Voltage | | 25 | 35 | | V |
| Operating Voltage | | | | 50 | V |
| Environmental Characteristics | | | | | |
| ESD | | 2 K | | | V |
| Operating Temperature | T _J | -55 | | +125 | °C |
| Storage Temperature | T _{stg} | -65 | | +150 | °C |
| Power Rating per Package @ 70 °C | | | | 1.0 | Watt |

Filter Response

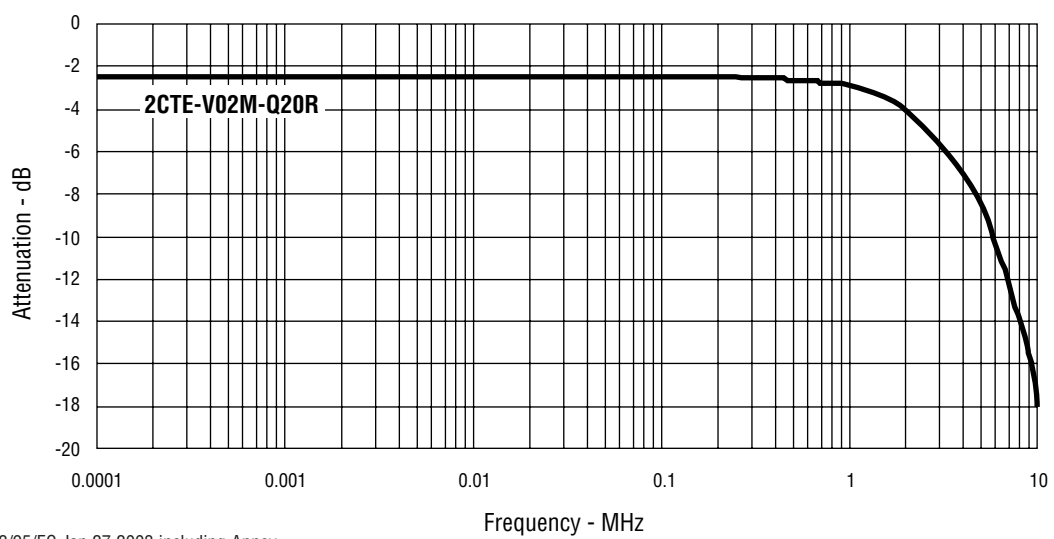

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex


Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.

Thin Film on Silicon 2CTE IEEE 1284 Terminator

BOURNS®

Mechanical Characteristics

QSOP Package Dimensions

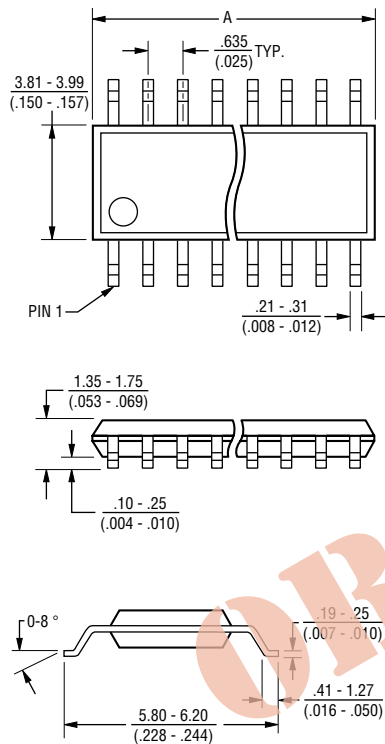


| Model | A |
|--------|---------------------------|
| 2QSP20 | 8.56 - 8.74 (.337 - .344) |

Governing dimensions are in mm. Dimensions in parentheses are in inches and are approximate.


JEDEC Reference Number M0-137.

QSOP Package Power Temperature Derating Curve

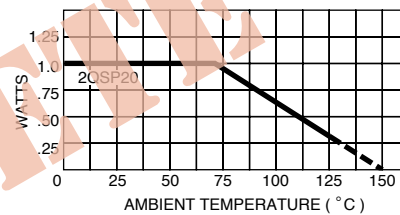

Typical Part Marking

Represents total content. Layout may vary.



Standard RC Values


| Value Code | R1 Value (ohms) | R2 Value (ohms) | C1 Value (pF) | Cap. BV (typ.) | Part Number (Tape & Reel) | Part Number (Tubes) |
|------------|-----------------|-----------------|---------------|----------------|---------------------------|---------------------|
| V01 | 1 K | 33 | 180 | 25 | 2CTE-V01M-Q20R | 2CTE-V01M-Q20T |
| V02 | 2.2 K | 33 | 220 | 25 | 2CTE-V02M-Q20R | 2CTE-V02M-Q20T |
| V03 | 4.7 K | 10 | 180 | 25 | 2CTE-V03M-Q20R | 2CTE-V03M-Q20T |
| V04 | 4.7 K | 33 | 180 | 25 | 2CTE-V04M-Q20R | 2CTE-V04M-Q20T |
| V05 | 4.7 K | 270 | 33 | 25 | 2CTE-V05M-Q20R | 2CTE-V05M-Q20T |
| V08 | 1 K | 33 | 47 | 25 | 2CTE-V08M-Q20R | 2CTE-V08M-Q20T |
| V09 | 2.2 K | 33 | 47 | 25 | 2CTE-V09M-Q20R | 2CTE-V09M-Q20T |

Thin Film on Silicon 2CTE IEEE 1284 Terminator

BOURNS®

Dispensing


For large quantities, the product will be dispensed in Tape and Reel (see diagram below).

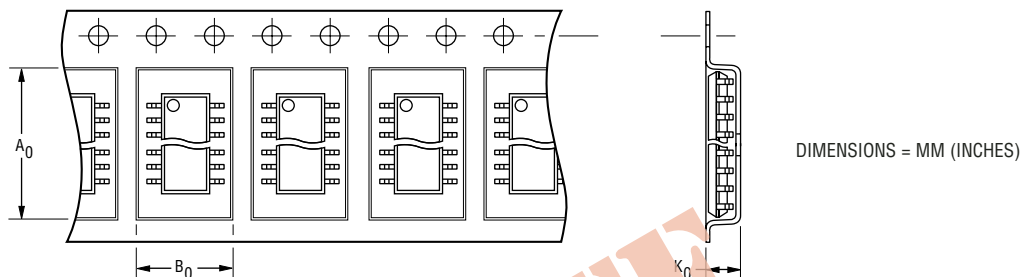

| Package | A ₀ | B ₀ | K ₀ | Width | Pitch | No. of Pieces per 13 reel | No. of Pieces per tube |
|----------------|----------------|----------------|----------------|------------|-----------|---------------------------|------------------------|
| QSOP 20 Pin | 6.5 (0.256) | 9.0 (0.354) | 2.1 (0.083) | 16 (0.630) | 8 (0.315) | 3,500 | 56 |

How To Order

2 CTE-V02 M-Q 20 R LF

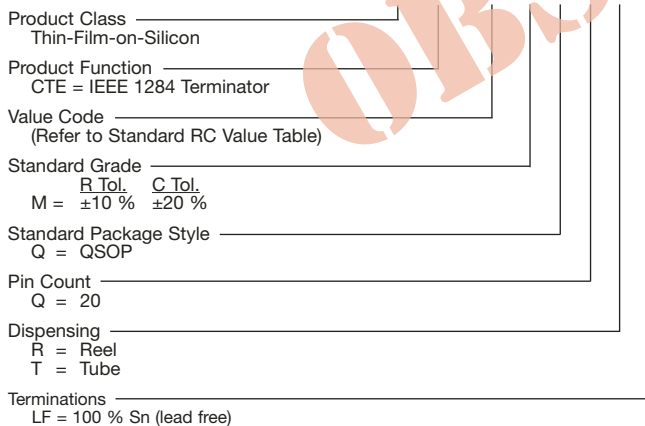

Reliable Electronic Solutions

Asia-Pacific:
Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe:
Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas:
Tel: +1-951 781-5500 • Fax: +1-951 781-5700
www.bourns.com