





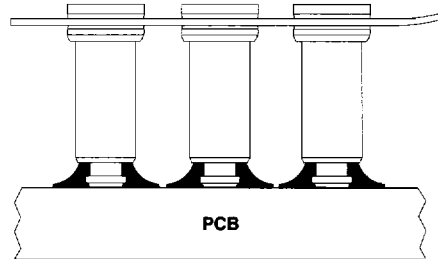

Surface Mount Dual In-line Sockets & Adapters

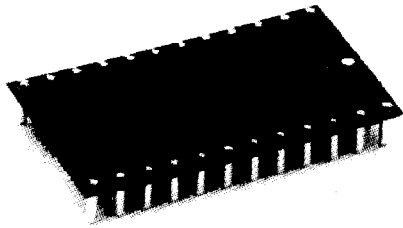

Peel-A-Way®
Surface Mount Sockets



Surface Mount Top/Bottom

Features:

- Sockets surface mount to PCB.
- Available in high temperature Peel-A-Way® socket terminal carrier.
- Peel-A-Way® carrier can be left in place for added stability.
- High reliability screw machine terminals with multiple finger beryllium copper contacts.
- Available with solder preforms, See page 35 for preform information.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel


Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:


KS/KA - Polyimide Film

Temp. range -269°C to 400°C
(-452°F to 752°F)


Terminal Information

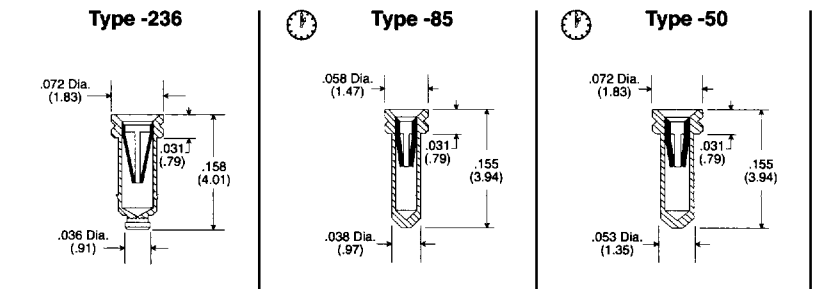

Type -258



Type -574



Quick turn delivery available on standard terminal types.


Additional terminal types available.

See terminal section for detailed terminal information.

Socket Options



RTV Sealed - Pg. 36



Solder Preform - Pg. 35

See designated pages for how to order information on these socket options.

How To Order

