


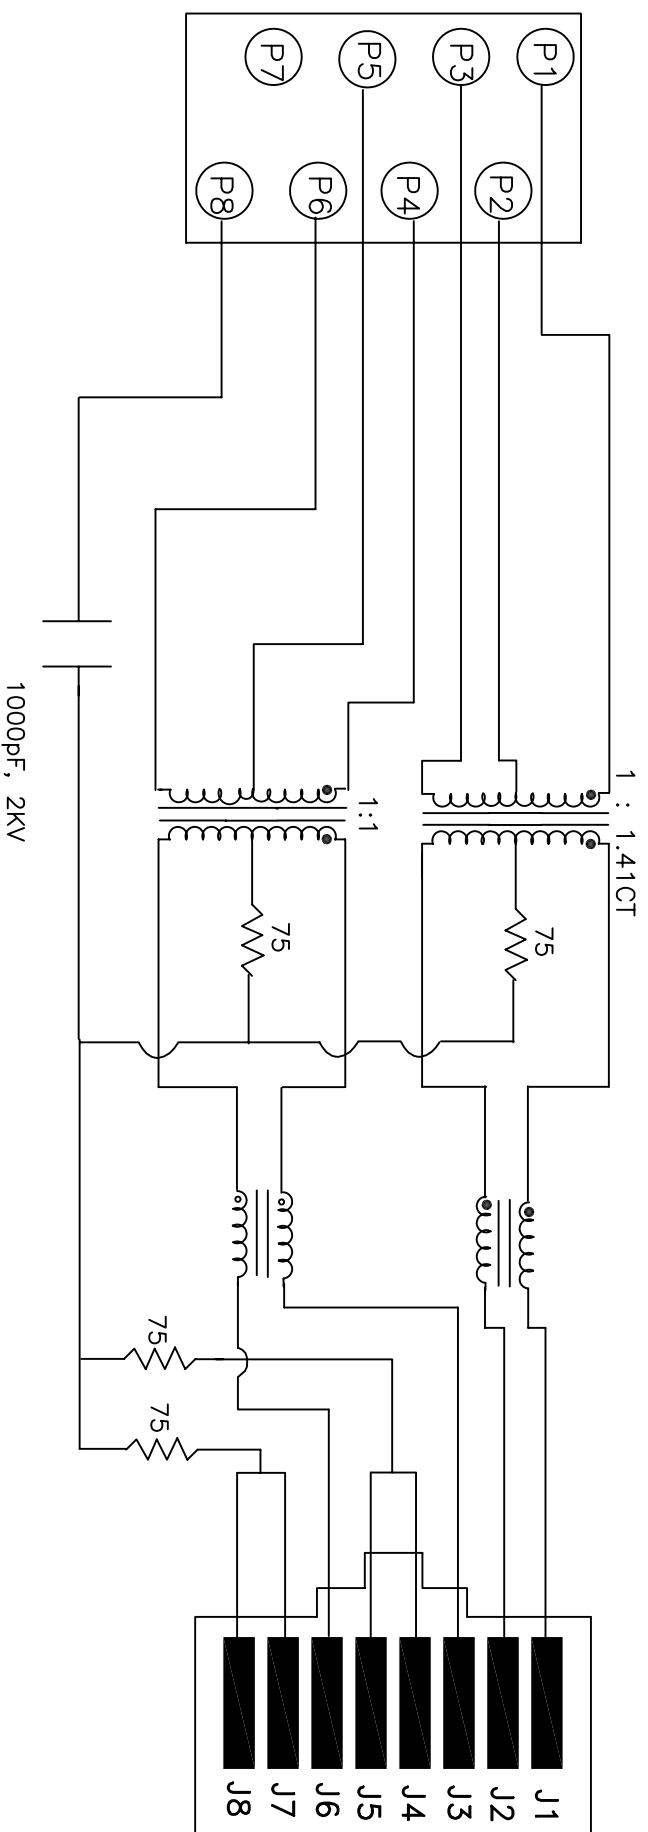

ELECTRICAL SPECIFICATIONS:




- | | | | | | | | |
|-----|---------------------------|-------------------------------------|------------------------|---------------------------|-------------|--------------|-----------------------------|
| 1.0 | TURNS RATIO: | $\frac{(P4-P5-P6)}{(P1-P2-P3)}$ | : | $\frac{(J3-J6)}{(J1-J2)}$ | : | 1CT $\pm$ 3% | |
| | | | : | | : | 1CT | 1.41CT $\pm$ 3% |
| 2.0 | INDUCTANCE: | $\frac{(P6-P4)}{(P3-P1)}$ | : | | : | 350uH MIN. | @ 0.1V, 100KHz, 8mA DC Bias |
| | | | : | | : | 350uH MIN. | @ 0.1V, 100KHz, 8mA DC Bias |
| 3.0 | LEAKAGE INDUCTANCE: | $\frac{P6-P5-P4}{P3-P2-P1}$ | (WITH J6 AND J3 SHORT) | : | 0.3 uH MAX. | @ 1MHz | |
| | | | (WITH J2 AND J1 SHORT) | : | 0.3 uH MAX. | @ 1MHz | |
| 4.0 | INTERWINDING CAPACITANCE: | $\frac{(P6, P5, P4)}{(P3, P2, P1)}$ | TO (J6, J3) | : | 30pf MAX | @ 1MHz | |
| | | | TO (J2, J1) | : | 30pf MAX | @ 1MHz | |
| 5.0 | DC RESISTANCE: | $(J6-J3)=(J2-J1)$ | : | | : | 1.2 ohms | Max. |

NOTES:

- 1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

Bel Stewart Connector
11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512
<http://www.stewartconnector.com>

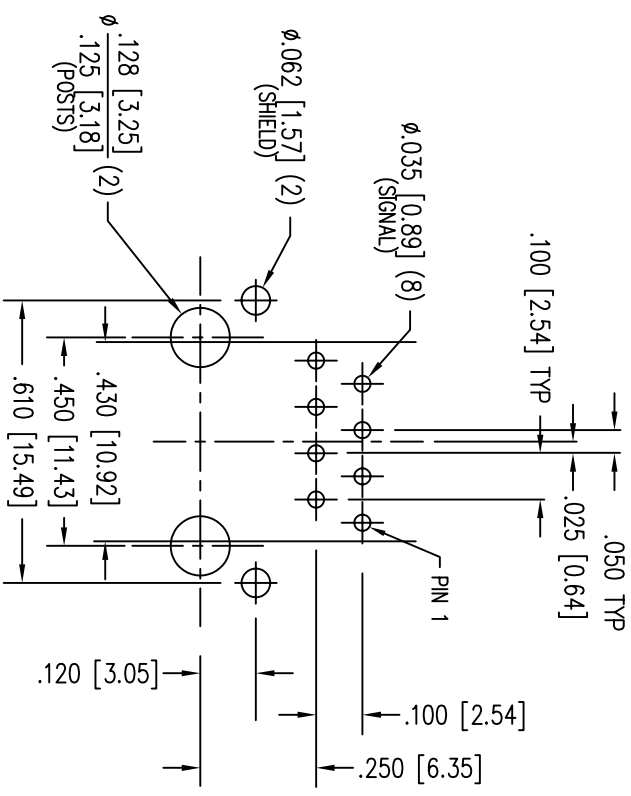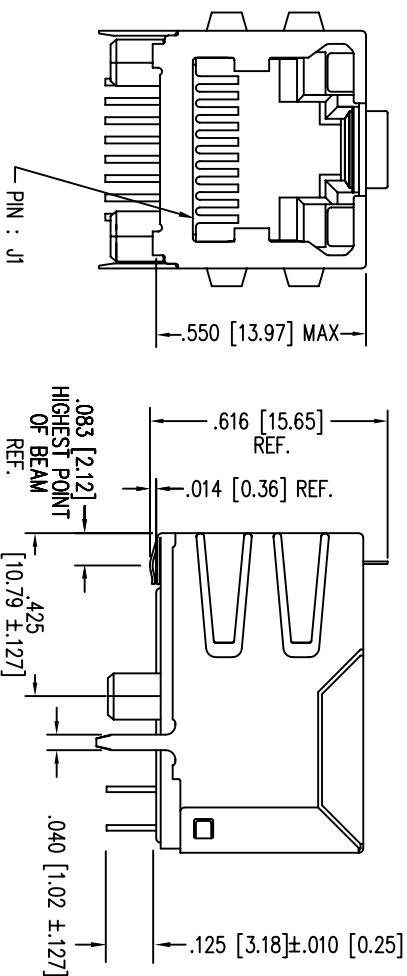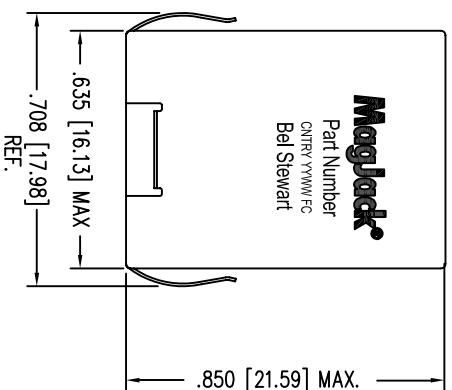

P.C.B. RECOMMENDED HOLE LAYOUT
SEEN FROM COMPONENT SIDE
TOLERANCE ±.003 [0.08] UNLESS OTHERWISE SPECIFIED


- NOTES:
1. CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD.
50 MICRO-INCHES MIN. IN CONTACT AREA.
 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED.
SEE ELECTRICAL DRAWING FOR OMITTED PINS.
 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
 4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
 5. WAVE SOLDER COMPATIBLE – PREHEAT 125°C/90SECS.

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

Bel Stewart Connector
11118 Susquehanna Trail, South
Glen Rock, Pa 17327-9199
717.234.7512
<http://www.stewartconnector.com>

Magjack®

SHEET 2 OF 3 DRAWING NO. SI-50017 REV. 05

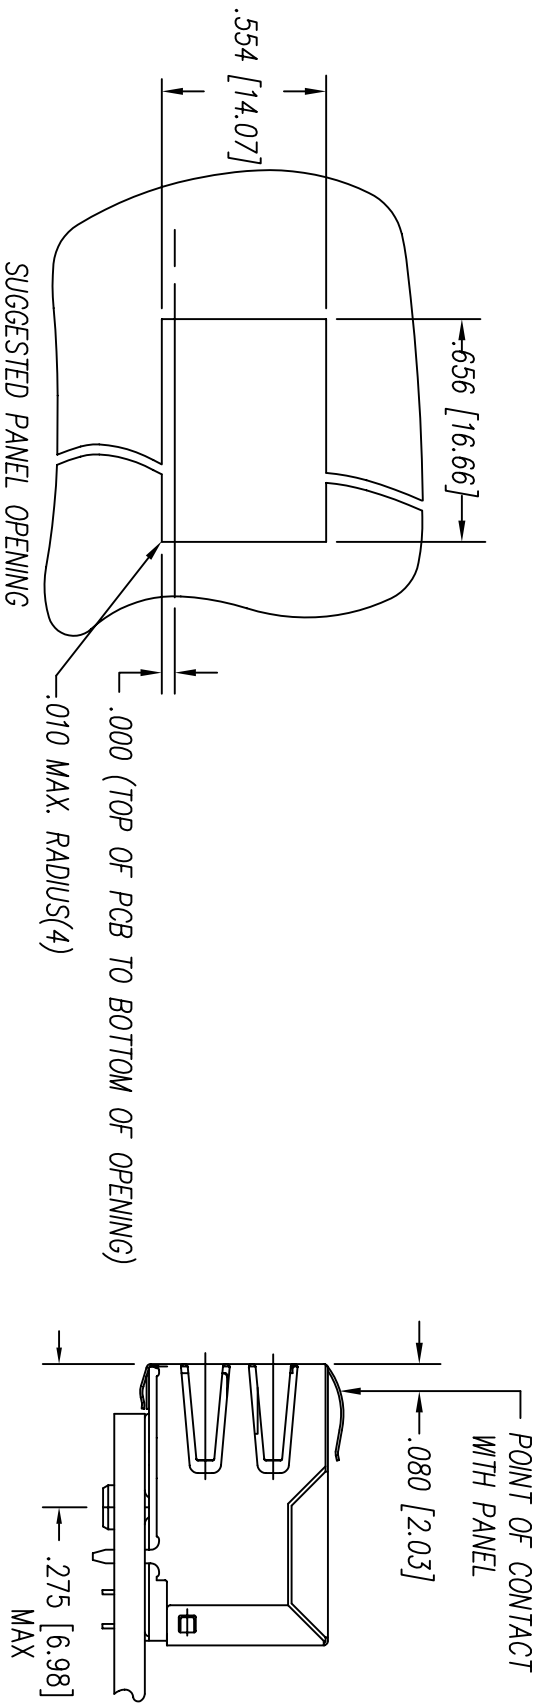

1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE $\pm .005$ [0.13]

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.