

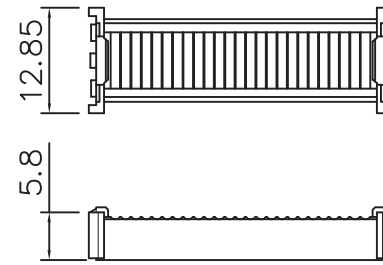


Without Insulator Support



Cover



Strain Relief

**Material:**

- Insulator: Glass-Filled Thermoplastic PBT, UL94V-0
- Contact: Copper alloy
- Shell: SPCC

**Electrical:**

- Contact Resistance: 20MΩ Max. @1Amp DC
- Insulation Resistance: 1,000MΩ @500V DC
- Dielectric Withstanding Voltage: 1,000V AC/rms 60Hz for 1 Min.
- Current Rating: 1 Amp
- Voltage Rating: 250V AC/rms 60Hz

\*Important is that the min mating cycles D-sub must have are 1,000

Unit: MM±0.25MM



ITEM NO.  
**A-DFF25LPXX-III-R**  
 TITLE  
 Flat Ribbon Cable D-Sub Assembly - 25Pin, Female,  
 Low Profile

**ASSMANN**  
 Electronics, Inc.  
 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 ©Copyright 2010 by Assmann Electronic Components  
 All International Rights Reserved