


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 277V AC 1HP 277V AC 1/2HP 125V AC	Mounting Hole	Circuit
	Contact Resistance 50m ohm Max. Insulation Resistance DC 500V 100M ohm Min. Dielectric Strength AC 1500V 1 minute Function 6P DPDT (ON)-OFF-(ON) Operation Temp. 0° C ~ 85° C		

() = Momentary Function

MATERIAL:

Frame: Nylon 66, Black
 UL Flame: 94-V2
 Cover: PA#66+30%GF A0520
 UL Flame: 94-V0
 Terminal: Copper Alloy
 Contact: Copper Alloy
Waterproof: IP56

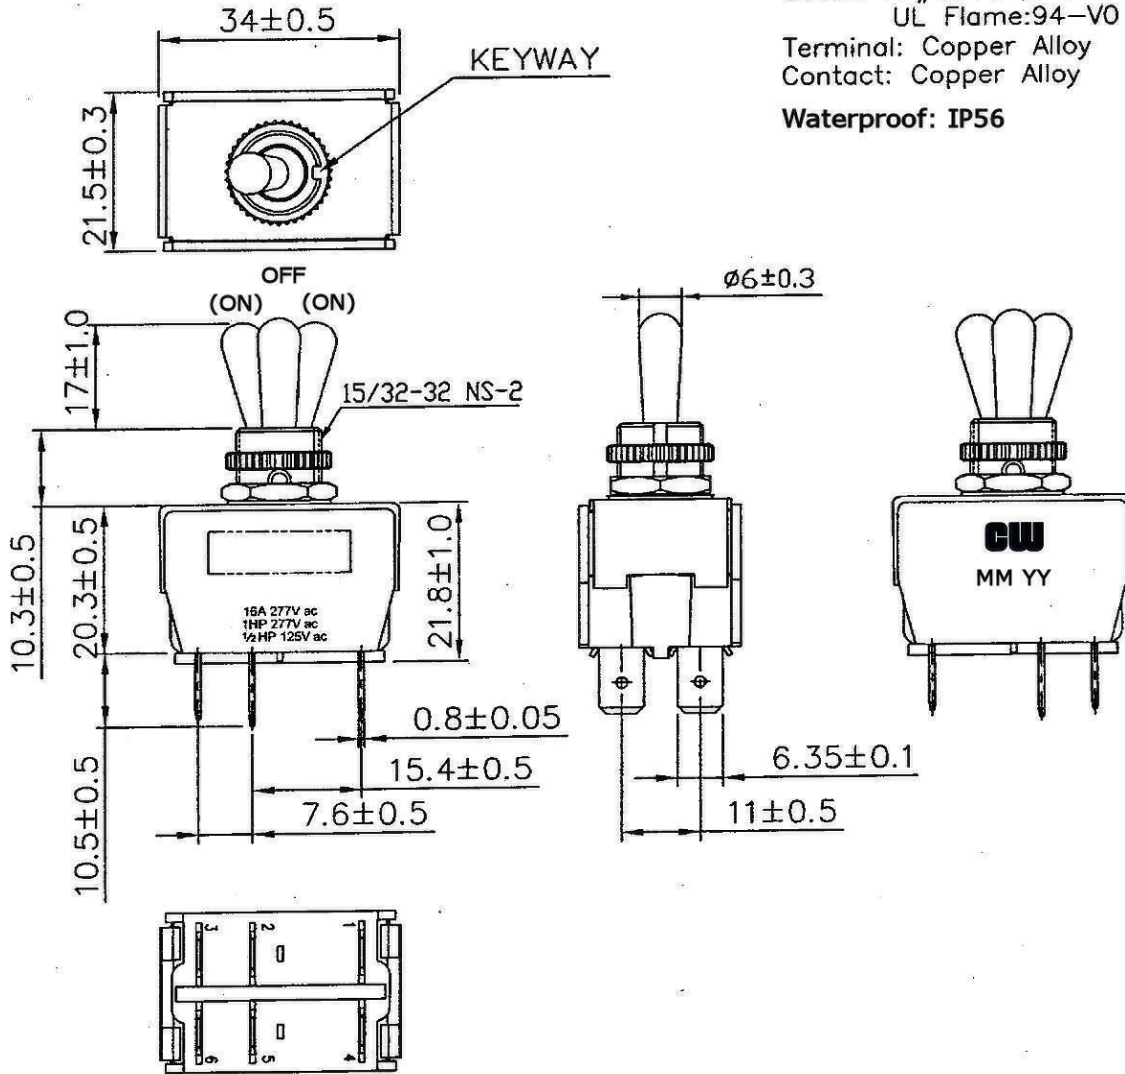

RoHS Compliant

2 Removed from drawing. 8/17/10.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 10/21/08

Rev. 2

Unit: mm

Checked By: G. Guld

Title: TOGGLE SWITCH

CW P/N: GTS448K101AHR