


# LF200D Series

## Ultra-Miniature, 2W Dual Output SMT DC/DC Converters

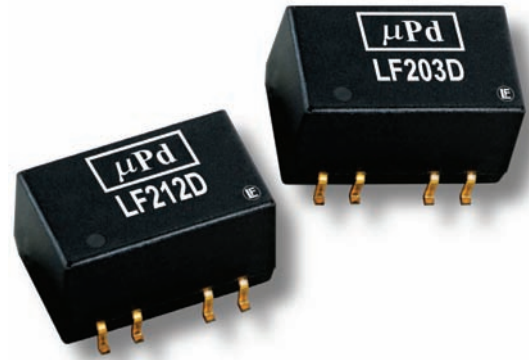


### Key Features:

- 2W Output Power
- Ultra-Miniature SMT Case
- 1,000 VDC Isolation
- 5V, 12 & 24V Inputs
- -40°C to +85°C Operation
- 7 Standard Models
- 2.0 MH MTBF Minimum
- Industry Standard Pin-Out



**RoHS Compliant**



**Tape/Reel  
Available**

### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerelectronics.com  
W: www.micropowerelectronics.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC	
	12 VDC Input	10.8	12.0	13.2		
	24 VDC Input	21.6	24.0	26.4		
Reverse Polarity Input Current				0.3	A	
Input Filter	Capacitor					

Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy			±1.5	±4.0	%	
Output Voltage Balance	Dual Output, Balanced Load		±0.1	±1.0	%	
Line Regulation	For Vin Change of 1%		±1.2	±1.5	%	
Load Regulation (Note 1)	See Model Selection Guide					
Ripple & Noise (20 MHz) (Note 2)			50	75	mV P - P	
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			150	mV P - P	
Ripple & Noise (20 MHz)				5	mv rms	
Output Power Protection		120			%	
Temperature Coefficient			±0.01	±0.02	%/°C	
Output Short Circuit	Momentary (0.5 Sec.)					

General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	60 Seconds	1,000			VDC	
Isolation Resistance	500 VDC	10			GΩ	
Isolation Capacitance	100 kHz, 1V		60	100	pF	
Switching Frequency		70	100	120	kHz	

Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+85	°C	
Operating Temperature Range	Case	-40		+90	°C	
Storage Temperature Range		-40		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	

Physical						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Case Size		0.60 x 0.36 x 0.34 Inches (15.3 x 9.3 x 8.7 mm)				
Case Material		Molding (UL94-V0)				
Weight		0.07 Oz (2.2g)				

Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	2.0			MHours	

Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC	
	12 VDC Input	-0.7		18.0		
	24 VDC Input	-0.7		30.0		
Lead Temperature	1.5 mm From Case For 10 Sec.			300	°C	
Internal Power Dissipation	All Models			650	mW	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


## Model Selection Guide

Model Number	Input				Output			Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
LF201D	5	4.5 - 5.5	519	60	±5.0	±200.0	±4.0	10	77	1,000
LF202D	5	4.5 - 5.5	504	60	±12.0	±83.0	±1.5	7	79	1,000
LF203D	5	4.5 - 5.5	501	60	±15.0	±66.0	±1.0	7	79	1,000
LF212D	12	10.8 - 13.2	202	30	±12.0	±83.0	±1.5	5	82	500
LF213D	12	10.8 - 13.2	201	30	±15.0	±66.0	±1.0	5	82	500
LF222D	24	21.6 - 26.4	102	15	±12.0	±83.0	±1.5	5	81	200
LF223D	24	21.6 - 26.4	100	15	±15.0	±66.0	±1.0	5	82	200

### Notes:

- Load regulation is measured for an output change of 20% to 100%.
- When measuring output ripple, it is recommended that an external 0.33  $\mu\text{F}$  ceramic capacitor be placed from each output to common. For noise sensitive applications, the use of 1.5  $\mu\text{F}$  capacitors will reduce the output ripple.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR ( $\text{ESR} < 1.0\Omega$  at 100 kHz) capacitor be mounted close to the converter. For 5V input units a 2.2  $\mu\text{F}$  is recommended, for 12V input units, a 1.0  $\mu\text{F}$  and for 24V input units a 4.7  $\mu\text{F}$ .
- The outputs of these units may be connected to provide a 10 VDC, 24 VDC or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

## Derating Curve

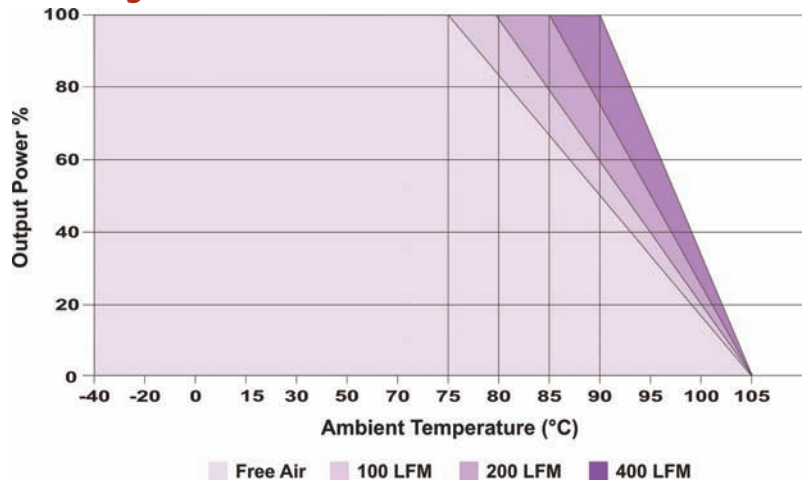

## Capacitive Load


Output	±5 VDC	±12 & ±15 VDC
$\mu\text{F}$ Max	±10 $\mu\text{F}$	±4.7 $\mu\text{F}$

## Pin Connections

Pin	Description	Pin	Description
1	-Vin	6	No Pin
2	+Vin	7	+Vout
3	No Pin	8	No Pin
4	Common	9	No Pin
5	-Vout	10	NA

NA = Not for electrical connection

## Mechanical Dimensions

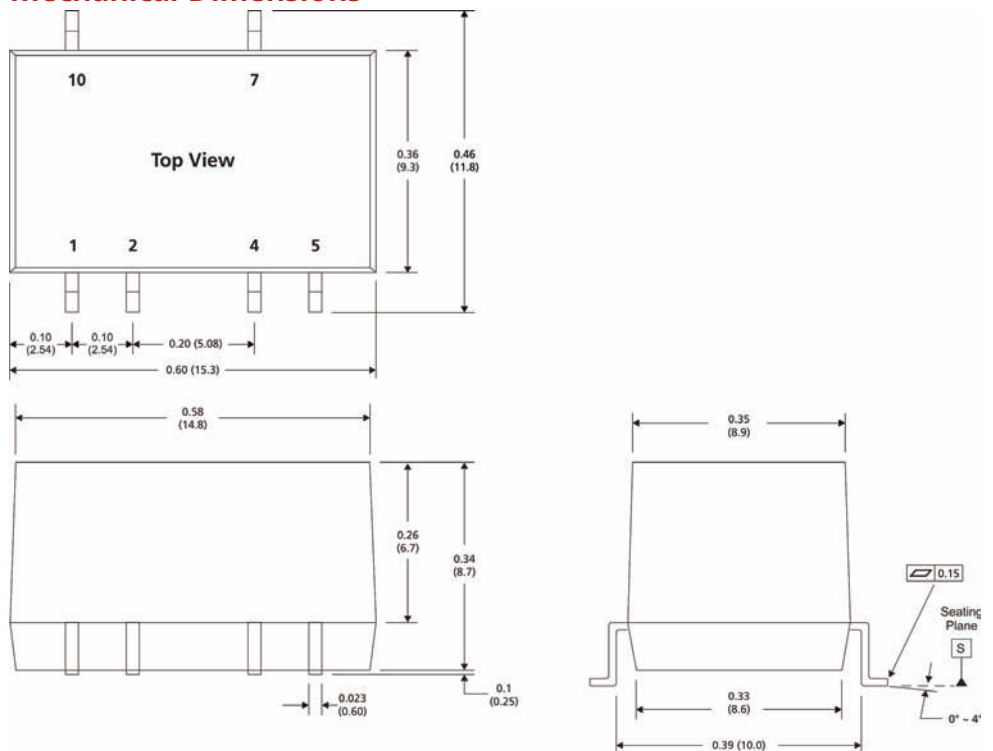

### Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)
- Pin 1 is marked by a "dot" or indentation on the unit



**MicroPower Direct**  
www.micropowerdirect.com