


- Features :
 - 3000VDC I/O isolation
 - Internal SMD technology
 - Protection: Short circuit
 - Non-conductive plastic case
 - Cooling by free air convection
 - SMD package styles
 - 100% full load burn-in test
 - Low cost / High reliability
 - Approved: UL / CUL
 - 1 year warranty

SPECIFICATION



MODEL NO.	F0505T-1W	F1205T-1W	F0509T-1W	F1209T-1W	F0512T-1W	F1212T-1W	F0515T-1W	F1215T-1W	
ORDER NO.	SFT01L-05	SFT01M-05	SFT01L-09	SFT01M-09	SFT01L-12	SFT01M-12	SFT01L-15	SFT01M-15	
OUTPUT	DC OUTPUT VOLTAGE		5V		9V		12V		
	OUTPUT CURRENT RANGE		0 ~ 200mA		0 ~ 111mA		0 ~ 84mA		
	EFFICIENCY		70%	70%	75%	73%	78%	73%	
	RATED POWER		1W						
	RIPPLE & NOISE (max.) Note.2		100mVp-p						
	LINE REGULATION Note.3		±1.2% for 1% input variation						
	LOAD REGULATION Note.4		±8.0%						
	VOLTAGE TOLERANCE		±8.0%						
INPUT	SWITCHING FREQUENCY(Typ.)		100KHz						
	VOLTAGE RANGE		4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V
	NORMAL VOLTAGE		5V	12V	5V	12V	5V	12V	5V
	INPUT CURRENT	Full load	264mA	123mA	264mA	123mA	264mA	123mA	264mA
		No load	30mA	19mA	30mA	19mA	30mA	19mA	30mA
PROTECTION		Fuse recommended							
PROTECTION	OVERLOAD		Momentary						
			Protection type : Broken						
PROTECTION	SHORT CIRCUIT		Momentary						
			Protection type : Broken						
ENVIRONMENT	WORKING TEMP.		-40 ~ +85°C (Refer to output load derating curve)						
	WORKING HUMIDITY		20% ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY		-40 ~ +105°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT		±0.03% / °C (0 ~ 50°C)						
	VIBRATION		10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes						
SAFETY & EMC	SAFETY STANDARDS		UL60950-1, CSA C22.2						
	WITHSTAND VOLTAGE		I/P-O/P: 3KVDC						
	ISOLATION RESISTANCE		I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH						
OTHERS	MTBF		500khrs min. MIL-HDBK-217F(25°C)						
	DIMENSION		15.24*7.5*6.5mm or 0.6**0.295**0.24" inch (L*W*H)						
	WEIGHT		1.7g						


■ Mechanical Specification




■ Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	NC
5	-Vout
6	NC
7	NC
8	+Vout
10	NC
11	NC
12	NC

■ Derating Curve

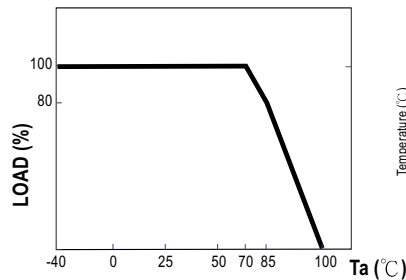

■ Reflow Soldering Curve

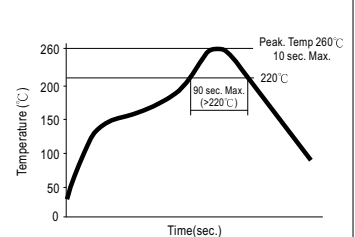

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 20% to 100% rated load.