



CHENMKO ENTERPRISE CO.,LTD

1SS400PT

SURFACE MOUNT SWITCHING DIODE

VOLTAGE 90 Volts CURRENT 0.1 Ampere

Lead free devices

APPLICATION
* Ultra high speed switching



FEATURE
* Small surface mounting type. (SC-79/SOD-523)
* High speed. (TRR=1.2nSec Typ.)
* Suitable for high packing density.
* Peak forward current is 225mA.
* Lead free devices

CONSTRUCTION
* Silicon epitaxial planar

MARKING
* 6



SC-79/SOD-523

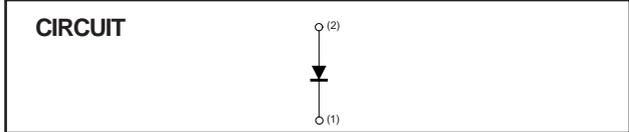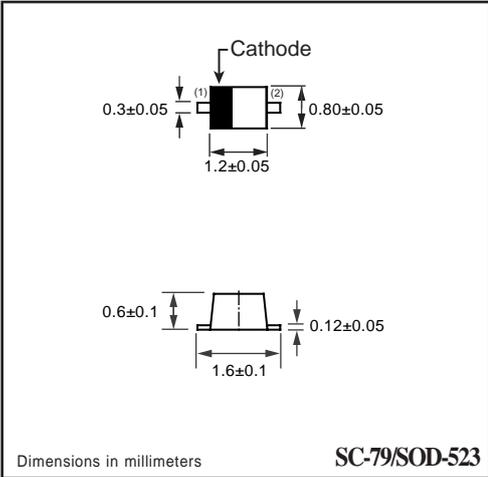

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | 1SS400PT | UNITS |
|--|--------|-------------|-------|
| Maximum Recurrent Peak Reverse Voltage | VRRM | 90 | Volts |
| Maximum RMS Voltage | VRMS | 63 | Volts |
| Maximum DC Blocking Voltage | VDC | 80 | Volts |
| Maximum Average Forward Rectified Current | Io | 0.1 | Amps |
| Peak Forward Surge Current at 1Sec. | IFSM | 0.5 | Amps |
| Typical Junction Capacitance between Terminal (Note 1) | CJ | 3.0 | pF |
| Maximum Reverse Recovery Time (Note 2) | TRR | 4.0 | nSec |
| Maximum Operating Temperature Range | TJ | +125 | °C |
| Storage Temperature Range | TSTG | -55 to +125 | °C |

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | 1SS400PT | UNITS |
|--|--------|----------|-------|
| Maximum Instantaneous Forward Voltage at If= 100mA | VF | 1.20 | Volts |
| Maximum Average Reverse Current at VR= 80V | IR | 0.1 | uAmps |

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 0.5 volts.
 2. Measured at applied forward current of 10mA , reverse voltage of 6.0 volts and RL=100 ohms.
 3. ESD sensitive product handling required.

RATING CHARACTERISTIC CURVES (1SS400PT)

FIG. 1 - SURGE CURRENT CHARACTERISTICS

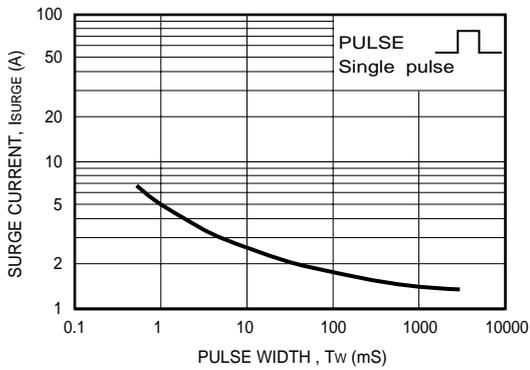


FIG. 2 - FORWARD CHARACTERISTICS

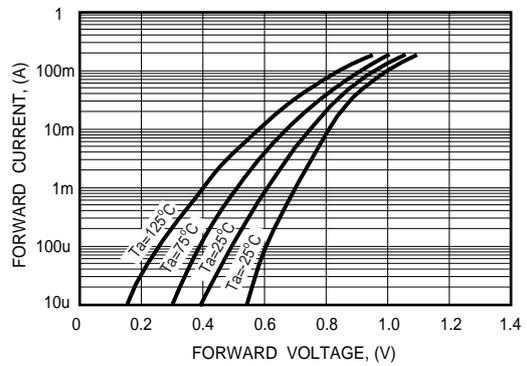


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

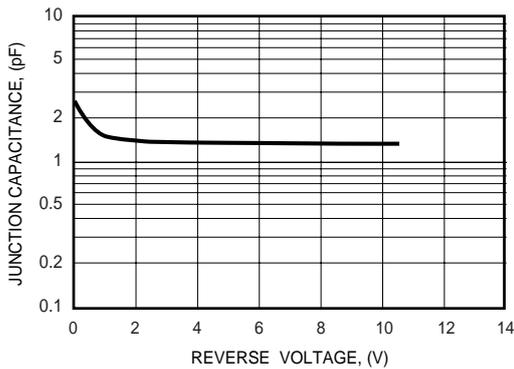


FIG. 4 - REVERSE CHARACTERISTICS

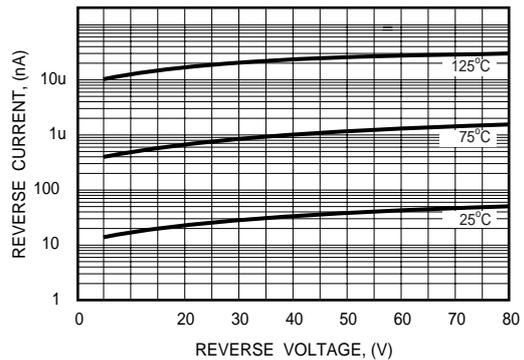


FIG. 5 - REVERSE RECOVERY TIME

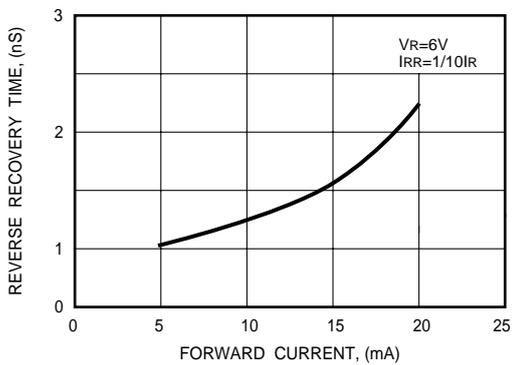


FIG. 6 - REVERSE RECOVERY TIME MEASUREMENT CIRCUIT

