


**Model 72917**  
**4mm Banana Plug to 2mm Sheathed Banana Jack Adapter**

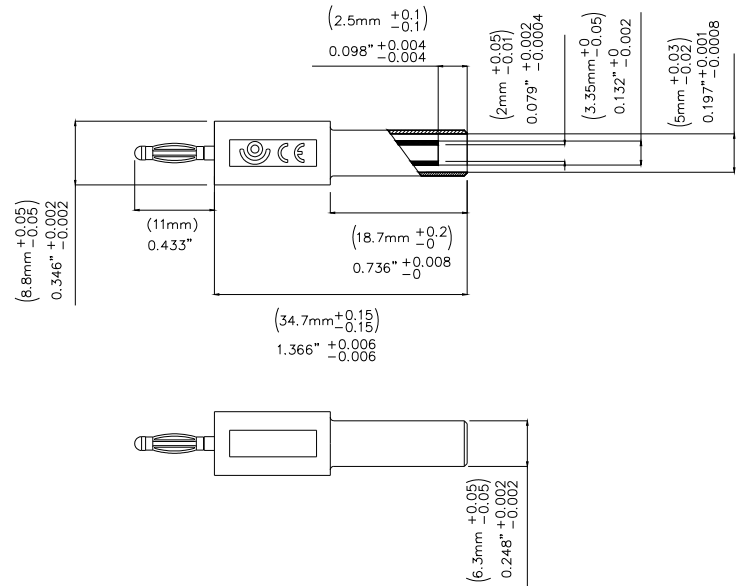

**Easy Adaptation from 2mm to 4mm Test**

**Features**

- Accepts 2mm safety-sheathed banana plugs
- Converts to standard 4mm banana plug
- Rating: 33 Vac / 70 Vdc, 10A

**Materials**

- Insulation: Polyamide
- Plug body: Nickel-plated Brass

**Ordering Information**

Model:72916- Color Sold in packages of 10 pieces  
Available colors: Black (-0) or Red (-2)

**Specifications**

Max Current	Max. 10A
Max Voltage	33 V AC / 70 V DC
Temperature	-20° C + 80° C
Max Resistance	Less than 0.8 mΩ

**Rating:** *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

USA: Sales: 800-490-2361 Fax: 888-403-3360  
Europe: 31-(0) 40 2675 150 International: 425-446-5500  
e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.