




MBRF1030CT-MBRF10100CT

Schottky Barrier Rectifiers

VOLTAGE RANGE: 30 - 100 V
CURRENT: 10 A

ITO-220AB

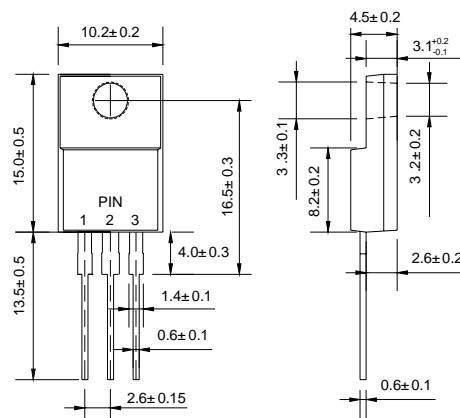

Dimensions in millimeters

Features

- ◇ High surge capacity.
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- ◇ Metal silicon junction, majority carrier conduction.
- ◇ High current capacity, low forward voltage drop.
- ◇ Guard ring for over voltage protection.

Mechanical Data

- ◇ Case: JEDEC ITO-220AB, molded plastic body
- ◇ Polarity: As marked
- ◇ Position: Any
- ◇ Weight: 0.06 ounce, 1.67 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

		MBRF 1030CT	MBRF 1035CT	MBRF 1040CT	MBRF 1045CT	MBRF 1050CT	MBRF 1060CT	MBRF 1090CT	MBRF 10100CT	UNITS								
Maximum recurrent peak reverse voltage	V_{RRM}	30	35	40	45	50	60	90	100	V								
Maximum RMS Voltage	V_{RMS}	21	25	28	32	35	42	63	70	V								
Maximum DC blocking voltage	V_{DC}	30	35	40	45	50	60	90	100	V								
Maximum average forward total device rectified current @ $T_c = 105^\circ\text{C}$	$I_{F(AV)}$	10								A								
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125								A								
Maximum forward voltage (I _F =5.0A, T _c =125°C) (Note 1) (I _F =5.0A, T _c =25°C)	V_F	0.57		0.70		-		0.85		V								
Maximum reverse current @ $T_c = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_c = 125^\circ\text{C}$	I_R	0.1		15		6.0 ³⁾		m A		m A								
Maximum thermal resistance (Note 2)	$R_{\theta JC}$	6.8				4.4				°C/W								
Operating junction temperature range	T_J	-55 ---- + 150								°C								
Storage temperature range	T_{STG}	-55 ---- + 150								°C								

NOTE: 1. Pulse test: 300μs pulse width, 1% duty cycle.

2. Thermal resistance from junction to case.

3. $T_c=100^\circ\text{C}$

Ratings AND Characteristic Curves

FIG.1 – PEAK FORWARD SURGE CURRENT

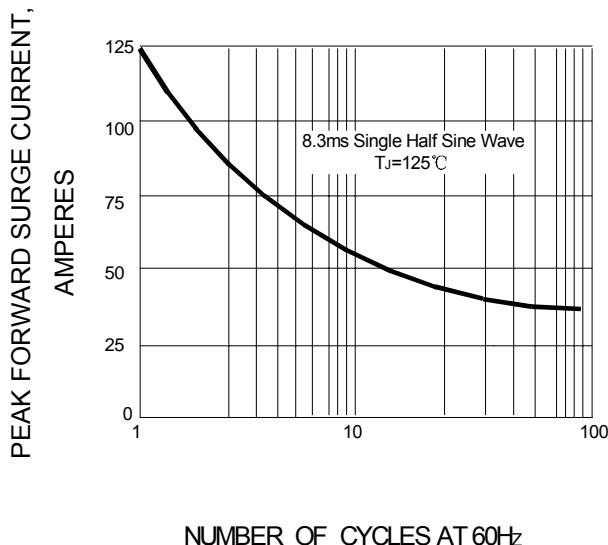


FIG.2 – FORWARD DERATING CURVE

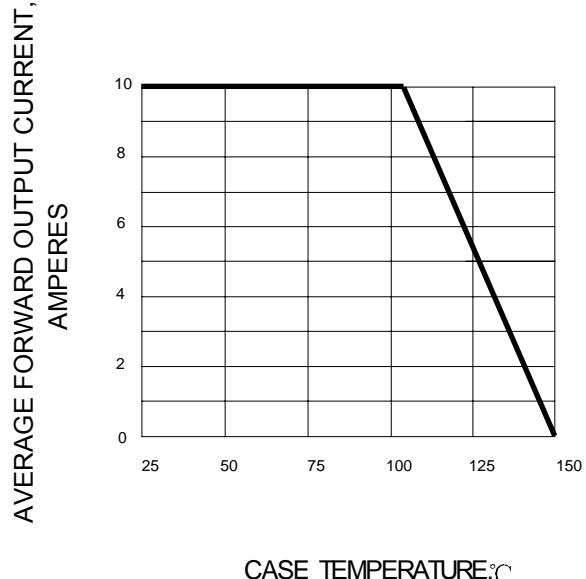


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

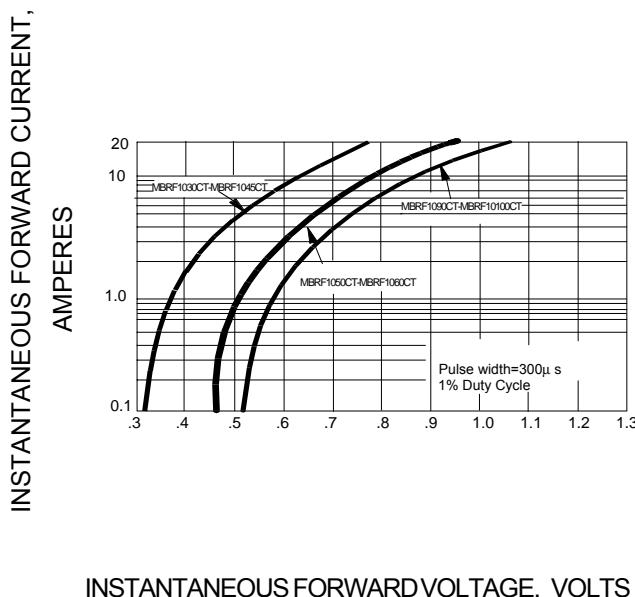


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

