



## PHOTON COUPLED ISOLATOR Ga As INFRARED EMITTING DIODE & LIGHT ACTIVATED SCR

### APPROVALS

- UL recognised, File No. E91231

### DESCRIPTION

The IS605, IS606 are optically coupled isolators consisting of infrared light emitting diode and a light activated silicon controlled rectifier in a standard 6pin dual in line plastic package.


### FEATURES

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High Isolation Voltage ( $5.3\text{kV}_{\text{RMS}}, 7.5\text{kV}_{\text{PK}}$ )
- High Surge Anode Current (5.0 A)
- High Blocking Voltage (400V\*<sup>1</sup>, 625V\*<sup>1</sup>)
- Low Turn on Current (5mA typical)
- All electrical parameters 100% tested
- Custom electrical selections available






### APPLICATIONS

- 10A, T<sup>2</sup>L compatible, Solid State Relay
- 25W Logic Indicator Lamp Driver
- 400V Symmetrical transistor coupler

#### OPTION SM SURFACE MOUNT



#### OPTION G



Dimensions in mm

### ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

### INPUT DIODE

Forward Current	60mA
Forward Current (Peak) (1μs pulse, 300pps)	3A
Reverse Voltage	6V
Power Dissipation	100mW

### DETECTOR

Peak Forward Voltage IS605	400V* <sup>1</sup>
IS606	625V* <sup>1</sup>
Peak Reverse Gate Voltage	6V
RMS On-state Current	300mA
Peak On-state Current (100μs, 1% duty cycle)	10A
Surge Current (10ms)	5A
Power Dissipation	300mW

\*1 IMPORTANT : A resistor must be connected between gate and cathode (pins 4 & 6) to prevent false firing ( $R_{\text{GK}} < 56\text{k}\Omega$ )

### ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, TS25 1YD England Tel: (01429)863609  
Fax : (01429) 863581 e-mail sales@isocom.co.uk  
<http://www.isocom.com>

### ISOCOM INC







1024 S. Greenville Ave, Suite 240,  
Allen, TX 75002 USA  
Tel:(214)495-0755 Fax:(214)495-0901  
e-mail info@isocom.com  
<http://www.isocom.com>

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ ) Reverse Voltage ( $V_R$ )	3	1.2	1.5	V V	$I_F = 10\text{mA}$ $I_R = 10\mu\text{A}$
Output (note 2)	Peak Off-state Voltage ( $V_{DM}$ ) IS605	400			V	$R_{GK} = 10\text{k}\Omega$ , $I_D = 2\mu\text{A}$
	IS606	625			V	$R_{GK} = 10\text{k}\Omega$ , $I_D = 2\mu\text{A}$
	Peak Reverse Voltage ( $V_{RM}$ ) IS605	400			V	$R_{GK} = 10\text{k}\Omega$ , $I_D = 2\mu\text{A}$
	IS606	625			V	$R_{GK} = 10\text{k}\Omega$ , $I_D = 2\mu\text{A}$
	On-state Voltage ( $V_{TM}$ )		1.1	1.3	V	$I_{TM} = 300\text{mA}$
	Off-state Current ( $I_{DM}$ ) IS605			2	$\mu\text{A}$	$R_{GK} = 10\text{k}\Omega$ , $I_F = 0$ , $V_{DM} = 400\text{V}$
	IS606			2	$\mu\text{A}$	$R_{GK} = 10\text{k}\Omega$ , $I_F = 0$ , $V_{DM} = 625\text{V}$
	Reverse Current ( $I_R$ ) IS605			2	$\mu\text{A}$	$R_{GK} = 10\text{k}\Omega$ , $I_F = 0$ , $V_{DM} = 400\text{V}$
	IS606			2	$\mu\text{A}$	$R_{GK} = 10\text{k}\Omega$ , $I_F = 0$ , $V_{DM} = 625\text{V}$
	Coupled Input Current to Trigger ( $I_{FT}$ ) (note 2) IS605 IS606 Turn on Time ( $t_{on}$ )			11 14 50	mA mA $\mu\text{s}$	$V_{AK} = 100\text{V}$ , $R_{GK} = 27\text{k}\Omega$ $V_{AK} = 100\text{V}$ , $R_{GK} = 27\text{k}\Omega$ $R_{GK} = 27\text{k}\Omega$ , $I_F = 30\text{mA}$ , $V_{AK} = 20\text{V}$ , $R_L = 200\Omega$
Coupled	Coupled dv/dt, Input to Output (dv/dt) Input to Output Isolation Voltage $V_{ISO}$	500			V/ $\mu\text{s}$	See note 1
	Input-output Isolation Resistance $R_{ISO}$ Input-output Capacitance $Cf$	5300 7500 $10^{11}$			$V_{RMS}$ $V_{PK}$ $\Omega$ pF	See note 1 $V_{IO} = 500\text{V}$ (note 1) $V = 0$ , $f = 1\text{MHz}$

Note 1 Measured with input leads shorted together and output leads shorted together.


Note 2 Special Selections are available on request. Please consult the factory.

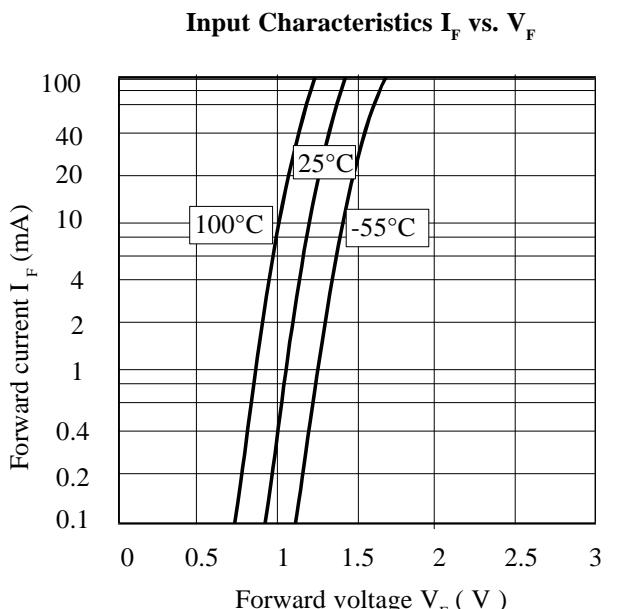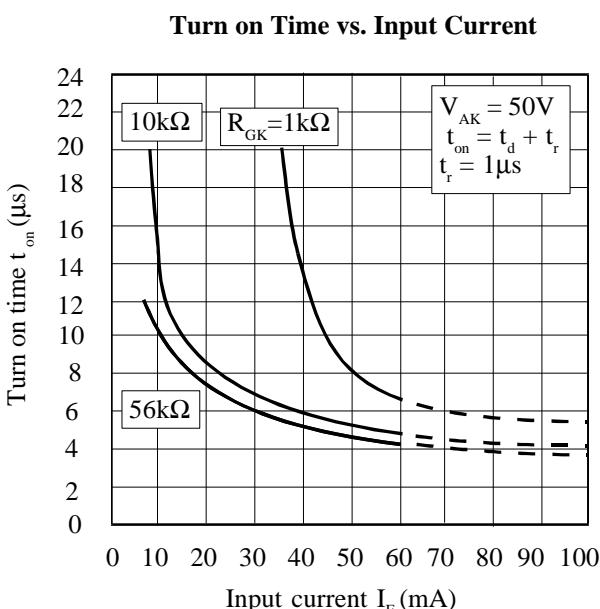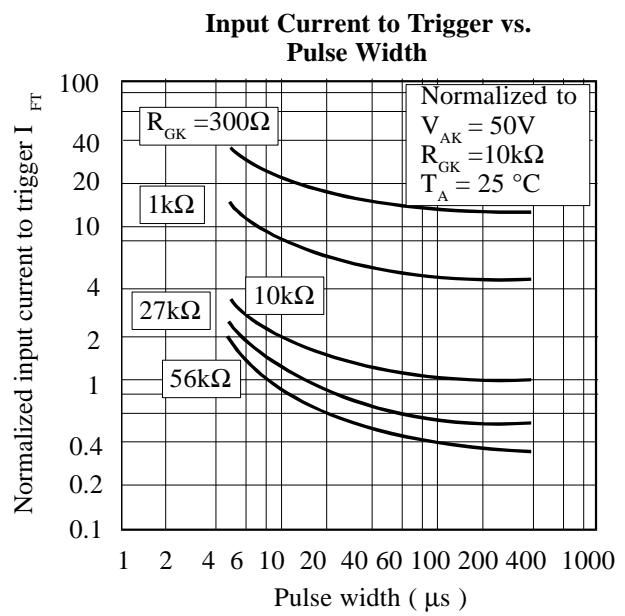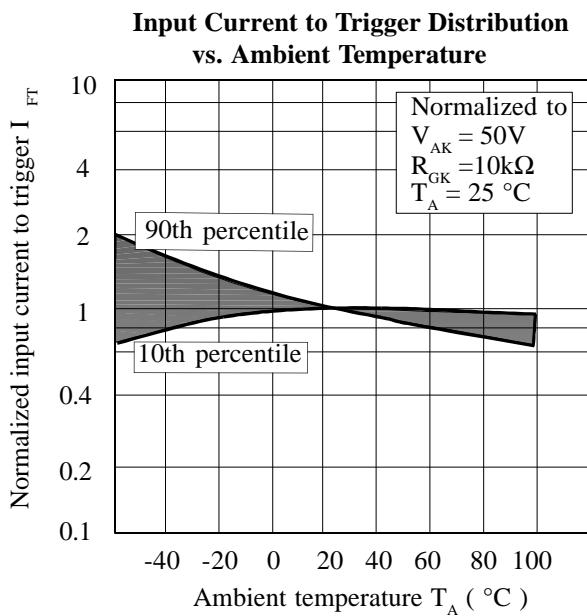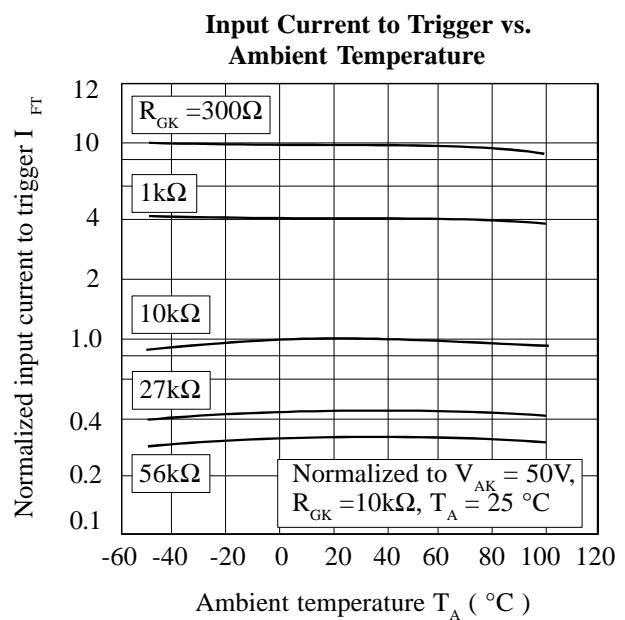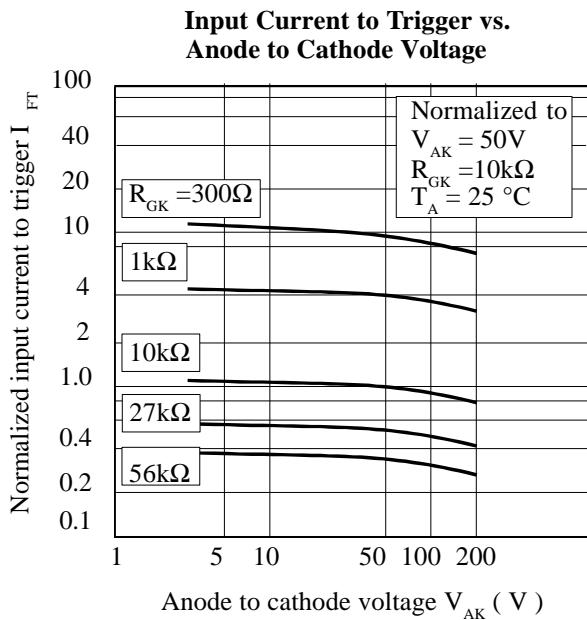


### Holding Current vs. Ambient Temperature

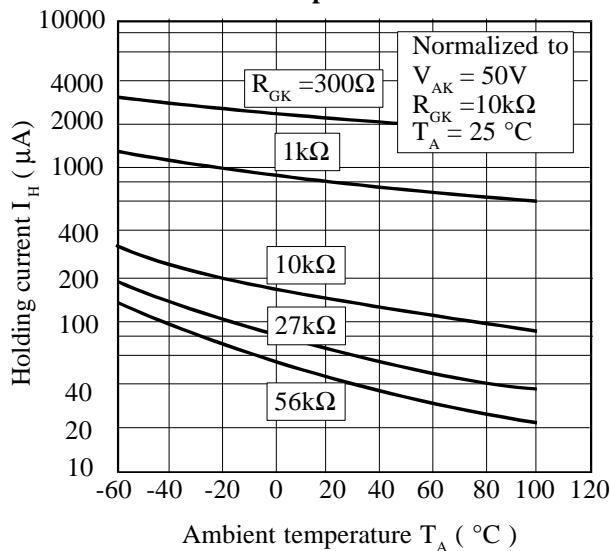


### Maximum Transient Thermal Impedance

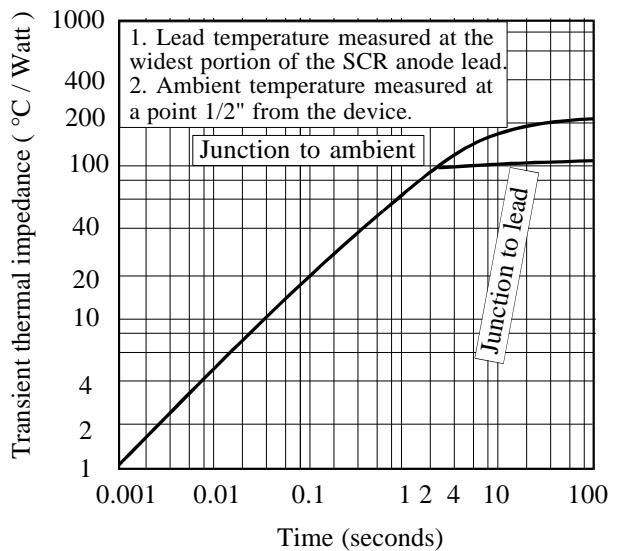


### Off State Forward Current vs. Ambient Temperature

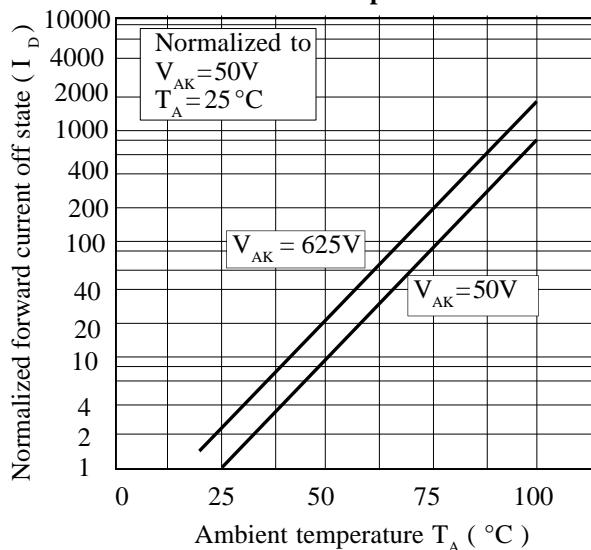

### On State Current vs. Maximum Allowable Temperature

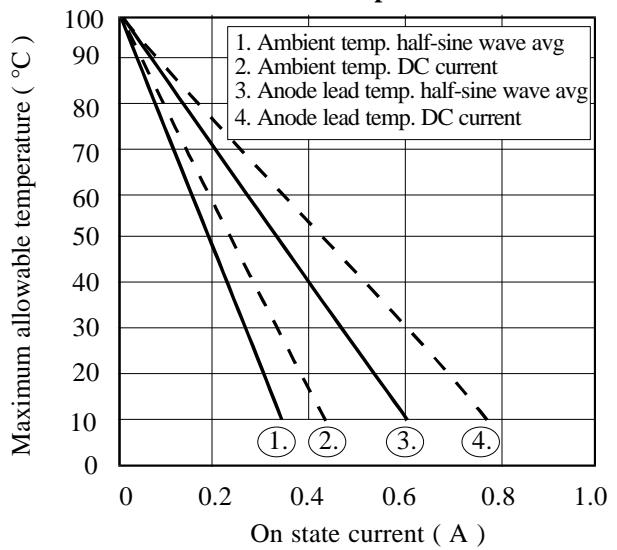

### dV/dt vs. Ambient temperature

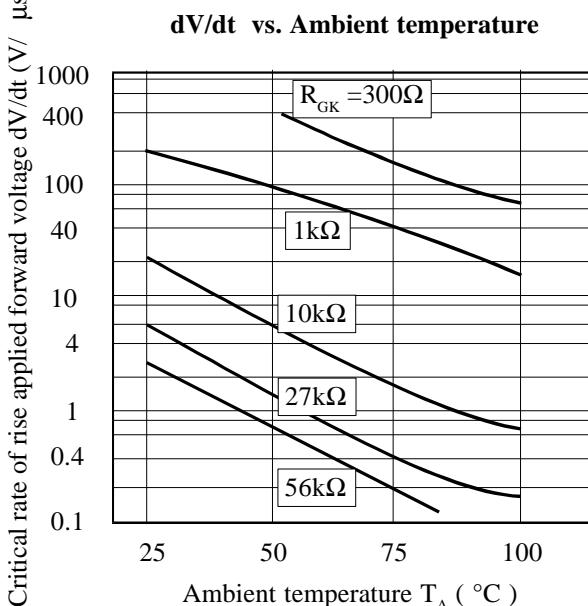

### On State Characteristics

