
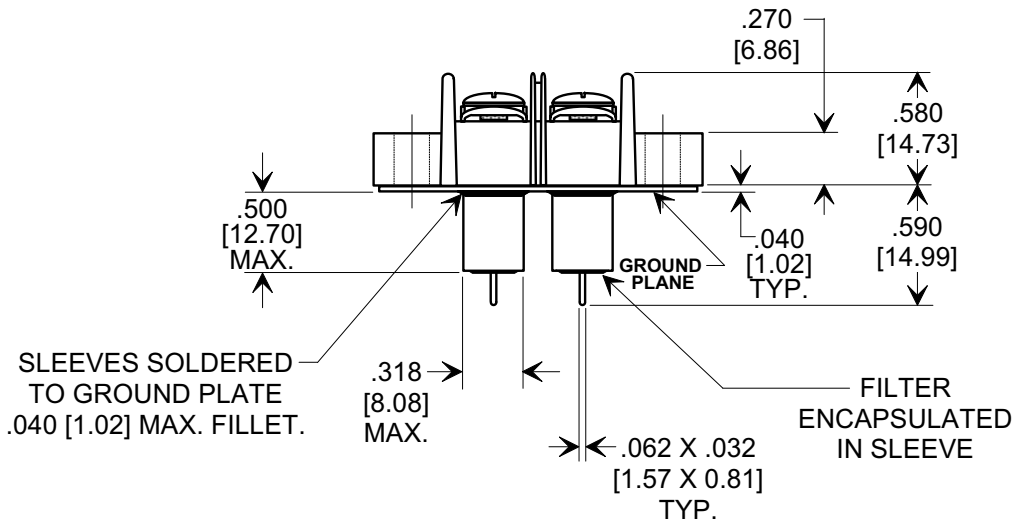
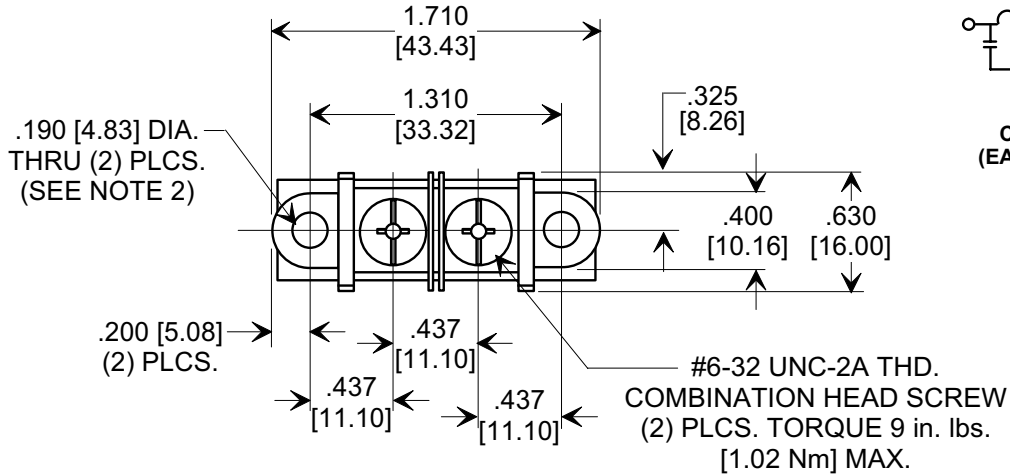



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

1. MAX. SOLDERING TEMPERATURE 500°F [260°C].
2. BLOCK MOUNTING: RECOMMENDED MOUNTING SCREWS (# 8 PAN HEAD). TORQUE 5 in. lbs. [0.56Nm] MAX.
3. MOLDED MATERIAL: HIGH TEMPERATURE THERMOPLASTIC (PBT), UL RATED 94 V-O.
4. UL FILE NO. E201344.

Cx (pF)	WORKING VOLTAGE -40°C TO +125°C	I _{DC}	I.R. MIN. @ 100 (VDC.)	DWV (VAC)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
					10 MHz	100 MHz	1 GHz	10 GHz
2000 MIN.	250 VAC	20 Amps	10 G Ω	1500	5	50	60	65

REVISION RECORD Original Release C.O.	WAS SK 7741-001. SM03-13-00	TOLERANCES unless otherwise specified	Title FILTERED TERMINAL BLOCK 2 POSITION, UL RECOGNIZED	
	20000308-5-02		2 PLC. DECIMAL ± N/A	Drawn S.M. 03-07-00 Scale FULL
	ADDED DWV & I.R. REVISED NOTES & METRIC. S.M. 06-16-04		3 PLC. DECIMAL ± .030 [0.76]	
	20040615-1-09		ANGLES ± N/A	Approved B.M. 03-07-00
NOTES 2 & 3 REVISED L.E. 06-29-04	20040628-5-07	TUSONIX TUCSON, ARIZONA	A	7602-503