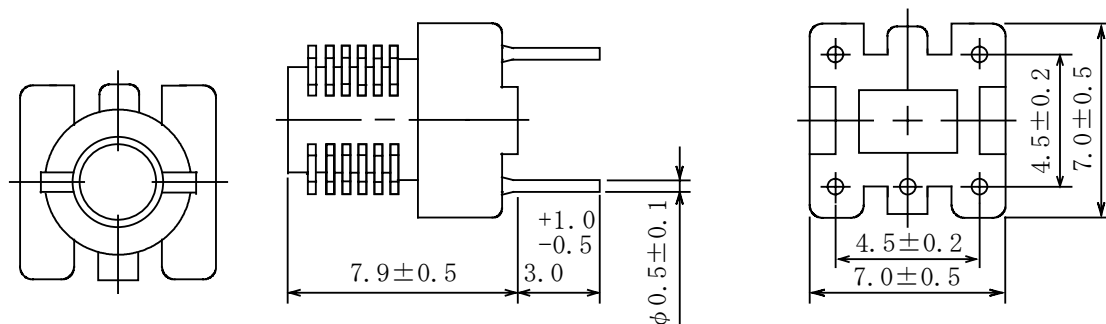


Type: S-7LFN
◆ Product Description


- 7.5×7.5mm Max.(L×W), 8.4mm Max. Height.
- Inductance:0.1~10 μ H Max.
- Operating frequency:150MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

◆ Feature

- Variable unshielded type.
- Internally assembled condenser is available.
- RoHS Compliance

◆ Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)


“S” is winding start

◆ Specification(Part No. 2227-T001)

Item	(1-4)	Measuring Condition
Tuning Capacity	31pF±10%	88MHz
Unloaded Qu	40 Min.	88MHz
Using Frequency: 56MHz ~119MHz		

- * (3) and (6) should be shorted when measuring.