

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0192520150](#)  
**Status:** **Active**  
**Overview:** [wire management products](#)  
**Description:** 287.02mm (11.300") Natural Cable Tie, 50 Pound Tensile Strength, 100/Bag

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Accessories
Series	<a href="#">19252</a>
Application Tooling Part Link	192940002
Comments	Maximum bundle diameter = 82.80mm (3.26"). Engineering Number N-11-50-9-C-LC
Component Type	Cable Tie
Overview	<a href="#">wire management products</a>
Product Name	N/A

**Physical**


Circuits (Loaded)	N/A
Lock to Mating Part	None
Packaging Type	Bag
Temperature Range - Operating	105°C

**Material Info**

Old Part Number	N-11-50-9-C-LC
-----------------	----------------

**Reference - Drawing Numbers**

Sales Drawing	SD-19252-001
---------------	--------------

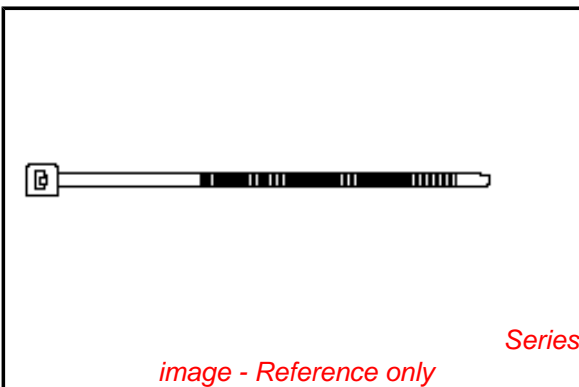

*image - Reference only*

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[19252Series](#)

**Application Tooling | [FAQ](#)**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
ServiceGrade™ Economy Cable Tie Tool	<a href="#">0192940002</a>



N-07-50-MH-9-C-XX

ⓓ

N = CABLE TIES

CABLE TIE LENGTH  
INCHES  
(ROUNDED)

TENSILE STRENGTH  
18 = 18 LBS  
40 = 40 LBS  
50 = 50 LBS  
120 = 120 LBS

TIE TYPE  
(BLANK) = STANDARD TIE  
ID = IDENTIFICATION  
MH = MOUNTING HOLE

INTERNAL DESIGNATOR

AMOUNT PER PACKAGE  
C = 100  
D = 500  
M = 1000

COLORS  
0 = UV BLACK  
9 = NATURAL  
30 = HEAT STABILIZED

SALES DRAWING

REMOVE BASE INFO EC NO: ETC2007-0295 DRWN: TBOANN02007/02/13 CHKD: JMACNEIL 2007/02/13 APPR: JMACNEIL 2007/02/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	DESCRIPTION	mm	INCH	DIMENSION STYLE IN/MM		TITLE	
	▽ = 0	4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	DRAWN BY B.ENDERL	DATE 04/05/11	19252 SERIES ENGINEERING NUMBERS CABLE TIES	
	∇ = 0	2 PLACES ± --- ± ---	1 PLACE ± --- ± ---	CHECKED BY H.BEITZL	DATE 04/05/11	MOLEX INCORPORATED	
REV		ANGULAR ± ---°		APPROVED BY R.DEROSS	DATE 04/05/11	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-19252-001
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1 OF 1