


| PARAMETER | | UNITS |
|---|--|------------------|
| Primary Impedance | 600 | Ω |
| Secondary Impedance | 600 | Ω |
| Longitudinal Balance 200 - 4000Hz @ 0dBm | 50dB min. | |
| Primary DC Resistance | 68 | Ω Max. |
| Secondary DC Resistance | 102 | Ω Max. |
| Frequency Response 200 - 4000Hz | ± 0.2 | dB |
| Insertion Loss | 2.0 Max. @ 1kHz | dB |
| Isolation (HI-POT) | 1000 | V _{RMS} |
| Primary DC | None | |
| Total Harmonic Distortion @ 400 Hz & 0 dBm | 50 Min. | dB |
| Return Loss | 18 min. 200 Hz to 4kHz 20 min. 300Hz to 4 KHz | dB dB |

T-735



600 Ω Audio Transformer

SCHMATIC DIAGRAM:



Physical Dimensions in inches (mm)

FOOTPRINT

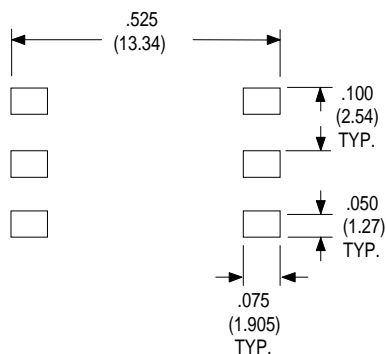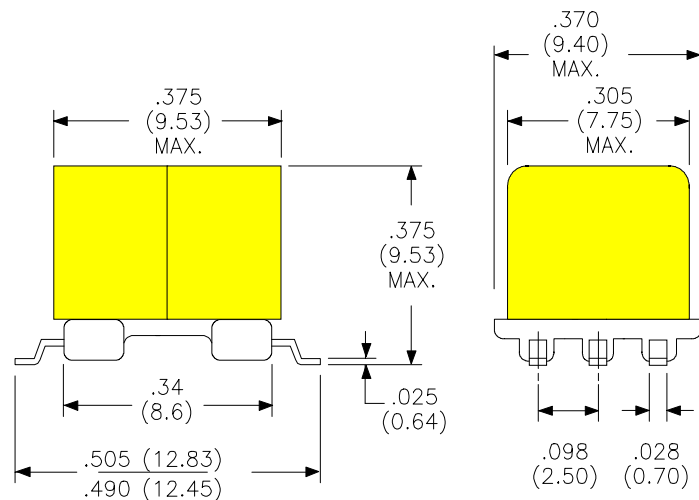

RHOMBUS INDUSTRIES INC.

FSCM NO. 16714

RHOMBUS P/N: T-735

CUST P/N:

NAME:

DATE: **9/30/96**

SHEET: 1 OF 1