



### 1. Dimensions:

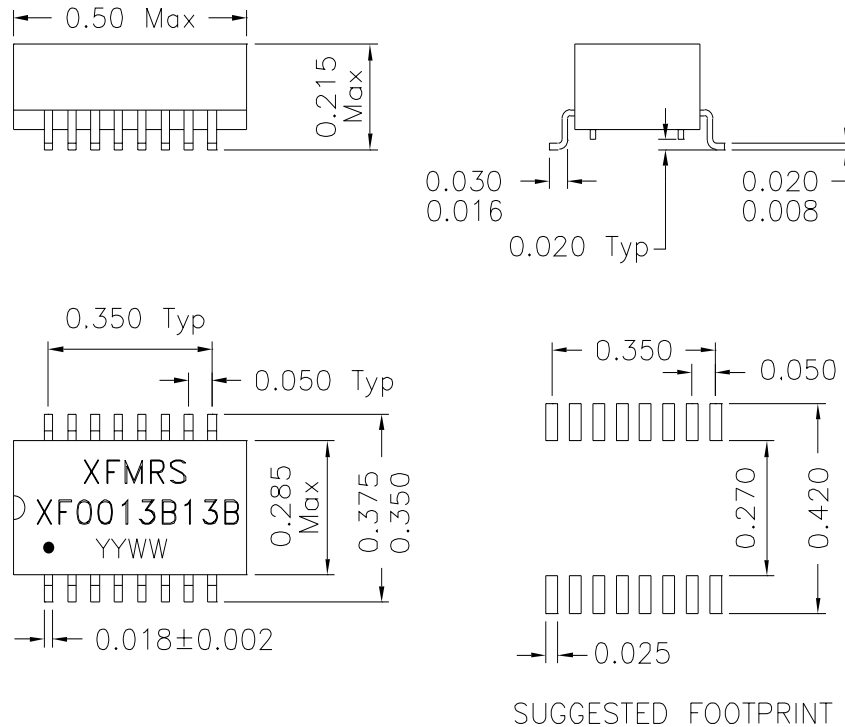

### 2. Schematic:

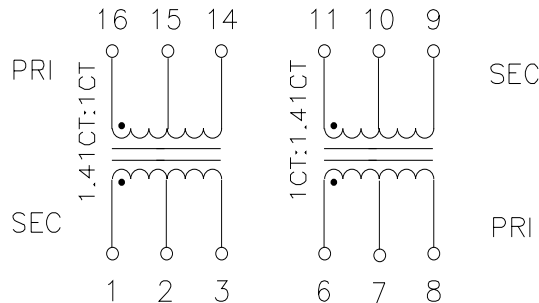

### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms  
 Turns Ratio: (16-15-14):(1-2-3)=1CT:1.41CT ±3%  
 (6-7-8):(11-10-9)=1CT:1.41CT ±3%  
 PRI OCL: 1.2mH MIN. @100KHz 50mV  
 Cw/w: 30pF MAX. @100KHz 50mV (PRI/SEC)  
 PRI LL: 0.6uH MAX. @100KHz 50mV (SEC Shorted)  
 PRI DC Resistance: 0.7 Ohms MAX.  
 SEC DC Resistance: 0.9 Ohms MAX.

DOC. REV: A/1

<b>XFMRs Inc</b> UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2.5:1 SHT 1 OF 1	Title: TRANSFORMER	
	P/N: XF0013B13B	REV. A
	DWN. 李清儿	Nov-11-99
	CHK. 孙小悦	Nov-11-99
APP. Joe Huff	Nov-11-99	