



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

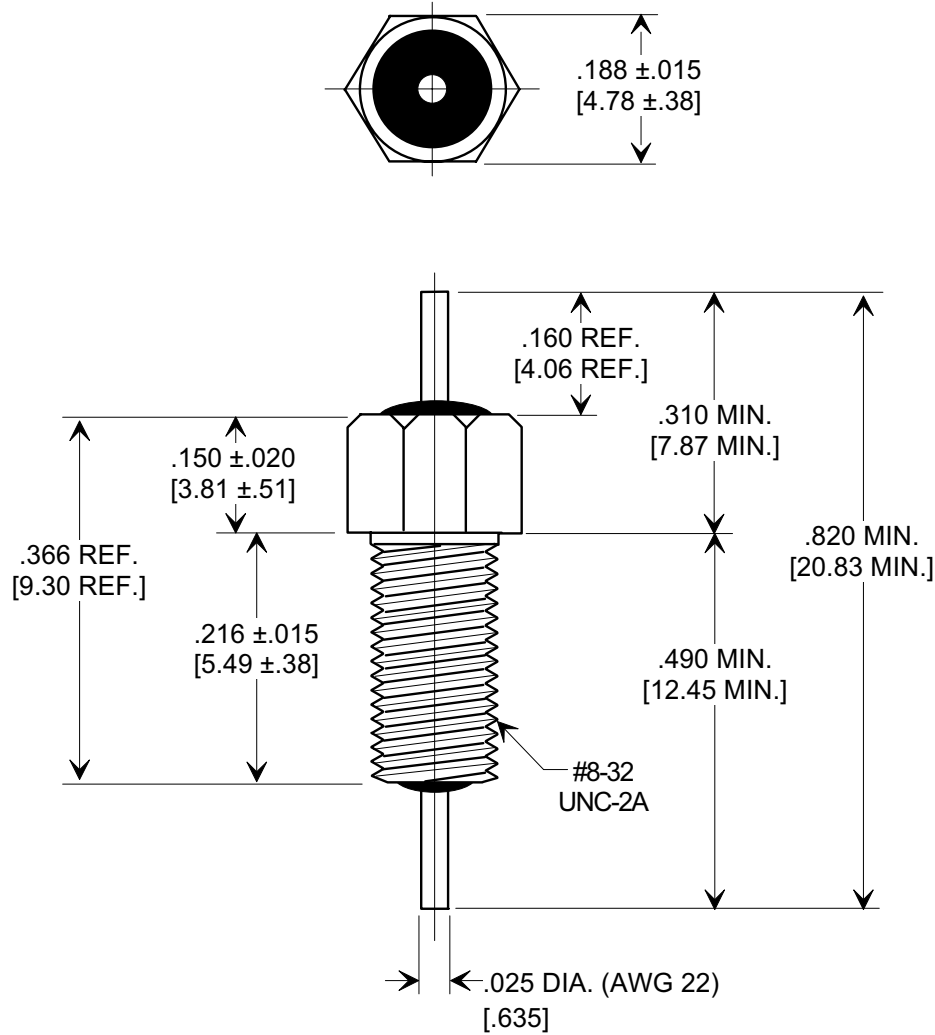

15,000 pF	50 VDC	20A	20	50	65	75	85
MIN. CAP.	125°C WORKING VOLTAGE	CURRENT IDC	10 MHz	50 MHz	100 MHz	200 MHz	1-10 GHz
			MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				

X-2015 Rev-0	REVISION RECORD	Title		EMI FILTER MIL-15733		
	Original Release C.O.	--TOLERANCES-- Unless Otherwise Specified				
	WAS SK 7093-001-S., E.C. 06-14-93	0	DECIMAL ±	Drawn	S.M. 01-12-98	Scale 4 X
	DWV REVISED. E.C. 05-12-94	1	ANGLES ±	Approved	J.Mc. 01-12-98	
REW. TO COMP. FMT. & ADD THREAD CALLOUT. S.M. 01-12-98	2	19980105-10-01	TUSONIX TUCSON, ARIZONA	A	4251-503	