

PRODUCT SPECIFICATION

DATE : 12/20/2012

cosmo ELECTRONICS CORPORATION	Photocoupler : KPC357NT0Z	NO.61P04119	REV.
		SHEET 1 OF 6	3

High Reliability Photocoupler

● Features

1. Halogen Free.
2. Pb free and RoHS compliant.
3. Low input current type ($I_F=0.1\text{mA}$).
4. Current transfer ratio (CTR : 100~600% at $I_F=0.1\text{mA}$ $V_{ce}=5\text{V}$).
5. High collector-emitter voltage($V_{ceo}:80\text{V}$).
6. High isolation voltage between input and output ($V_{iso}:3750\text{Vrms}$).
7. Mini-flat package:
compact 4 pin SOP with a 2.0mm profile
8. Agency Approvals
 - UL approved : No.E169586
 - VDE approved : No.40014684
 - FIMKO approved : EN 60065 No. FI 23147 A1
EN 60950 No. FI 24583 A1
 - CQC approved : No. CQC04001010530

● Application :

1. Computer terminals, programmable controllers.
2. Facsimile equipment, Audio, Video.
3. Communications, telephone, etc..

PRODUCT SPECIFICATION

DATE : 12/20/2012


cosmo
ELECTRONICS CORPORATION

Photocoupler :
KPC357NT0Z

NO.61P04119
SHEET 2 OF 6


REV.
3

1. OUTSIDE DIMENSION : UNIT (mm)

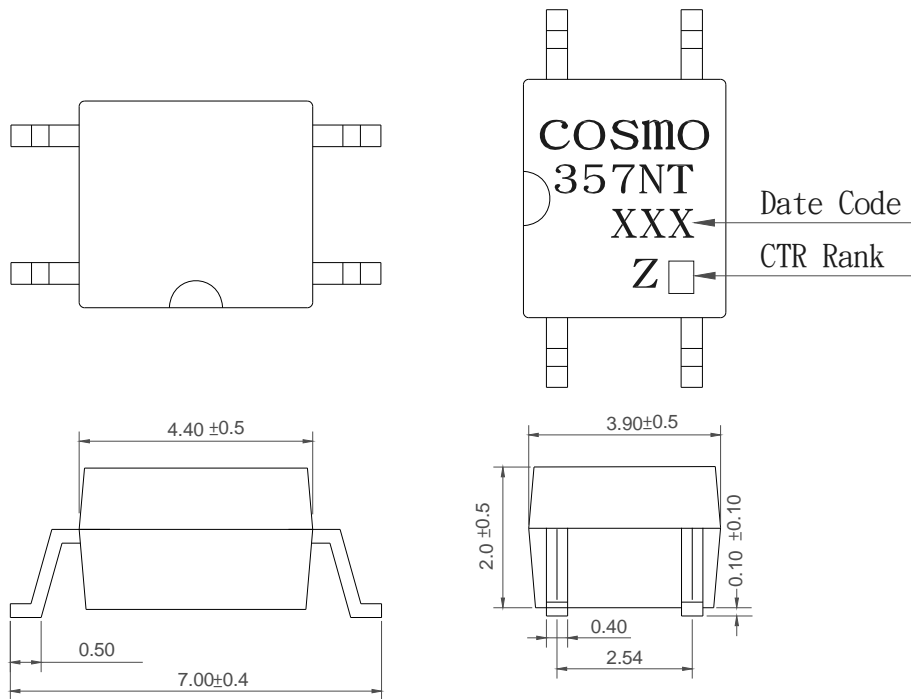

TOLERANCE : ± 0.2 mm

2. SCHEMATIC : TOP VIEW

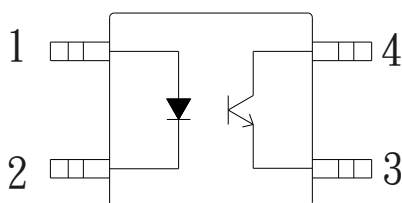

1. Anode
2. Cathode
3. Emitter
4. Collector

PRODUCT SPECIFICATION

DATE : 12/20/2012

cosmo ELECTRONICS CORPORATION	Photocoupler : KPC357NT0Z	NO.61P04119	REV.
		SHEET 3 OF 6	3

● Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	10	mA
	Peak forward current	I_{FP}	200	mA
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	15	mW
Output	Collector-emitter voltage	V_{CEO}	80	V
	Emitter-collector voltage	V_{ECO}	7	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	170	mW
Isolation voltage 1 minute		V_{iso}	3750	Vrms
Operating temperature		T_{opr}	-55 to +115	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature 10 second		T_{sol}	260	°C

● Electro-optical Characteristics

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F=10mA$	-	1.2	1.4	V
	Reverse current	I_R	$V_R=4V$	-	-	10	μA
	Terminal capacitance	C_t	$V=0, f=1KHz$	-	30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE}=50V$	-	-	0.1	μA
Transfer characteristics	Current transfer ratio	CTR	$I_F=0.1mA, V_{CE}=5V$	100	-	600	%
	Collector-emitter saturation	$V_{CE(sat)}$	$I_F=10mA, I_C=1mA$	-	0.1	0.2	V
	Isolation resistance	R_{iso}	DC500V, 40% to 60%RH	5×10^{10}	10^{11}	-	Ω
	Floating capacitance	C_f	$V=0, f=1MHz$	-	0.6	1.0	pF
	Response time (Rise)	t_r	$V_{CE}=2V, I_C=2mA, R_L=100\Omega$	-	4	-	μs
	Response time (Fall)	t_f		-	3	-	μs

PRODUCT SPECIFICATION

DATE : 12/20/2012

cosmo
ELECTRONICS CORPORATION

Photocoupler :
KPC357NT0Z

NO.61P04119
SHEET 4 OF 6

REV.
3

Classification table of current transfer ratio is shown below.

Rank mark	CTR (%)
KPC357NT0ZA	100 TO 600
KPC357NT0ZB	200 TO 500
KPC357NT0ZC	160 TO 400
KPC357NT0ZD	120 TO 300

Fig.1 Current Transfer Ratio vs. Forward Current

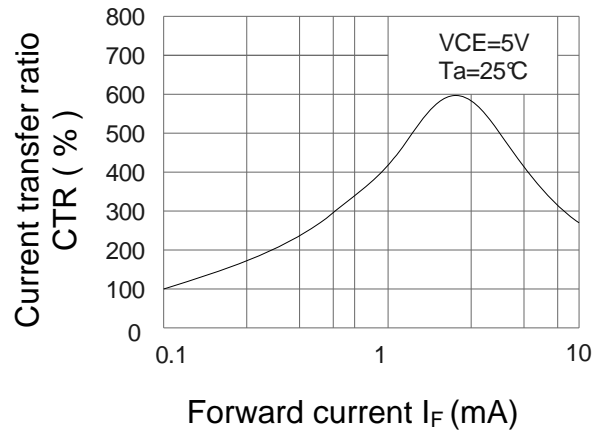


Fig.2 Collector Power Dissipation vs. Ambient Temperature

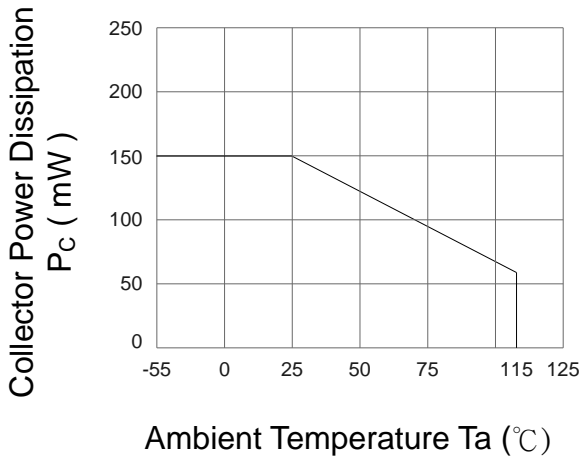


Fig.3 Collector Dark Current vs. Ambient Temperature

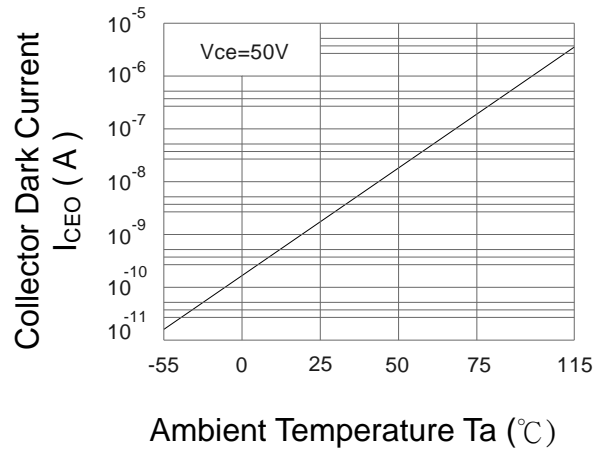


Fig.4 Forward Current vs. Ambient Temperature


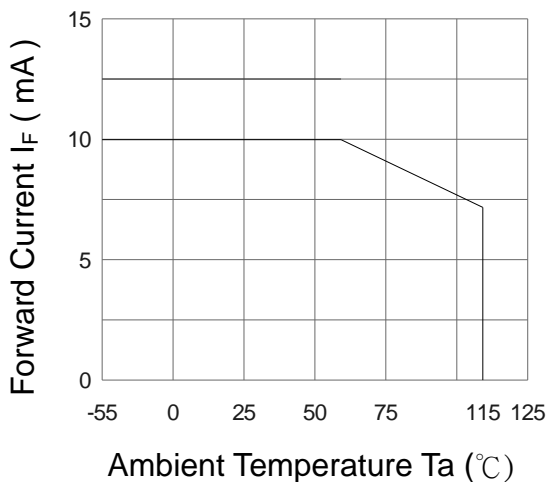


Fig.5 Forward Current vs. Forward Voltage

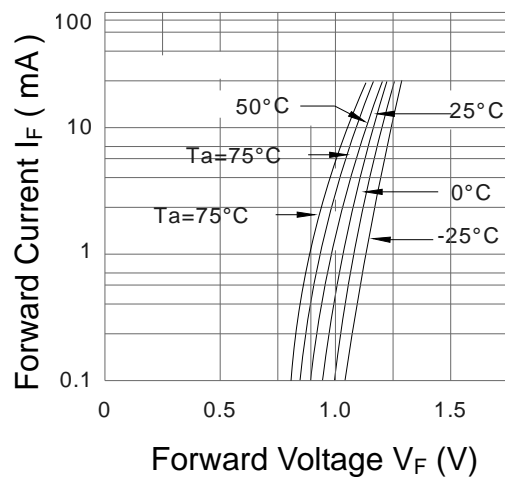

PRODUCT SPECIFICATION

DATE : 12/20/2012

cosmo ELECTRONICS CORPORATION	Photocoupler :	NO.61P04119	REV.
	KPC357NT0Z	SHEET 5 OF 6	3

Fig.6 Collector Current vs. Collector-Emitter Voltage

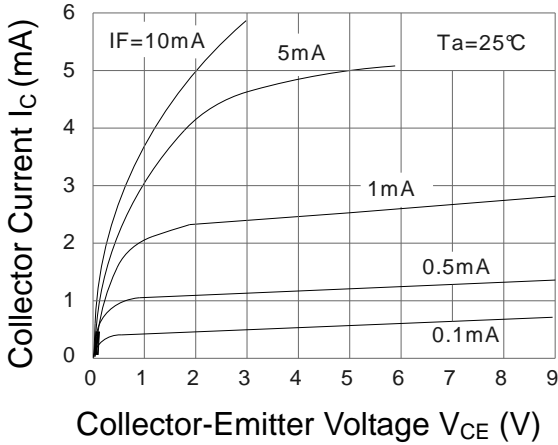


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

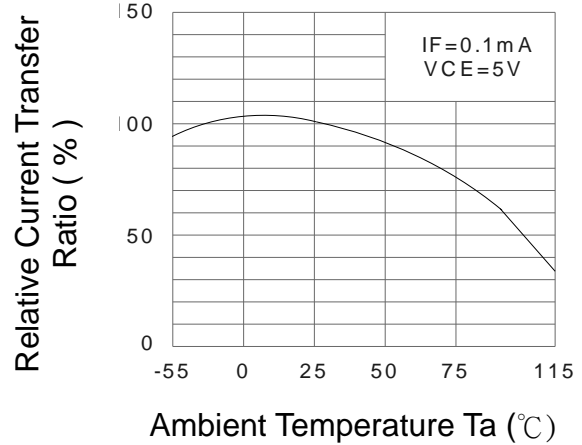


Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

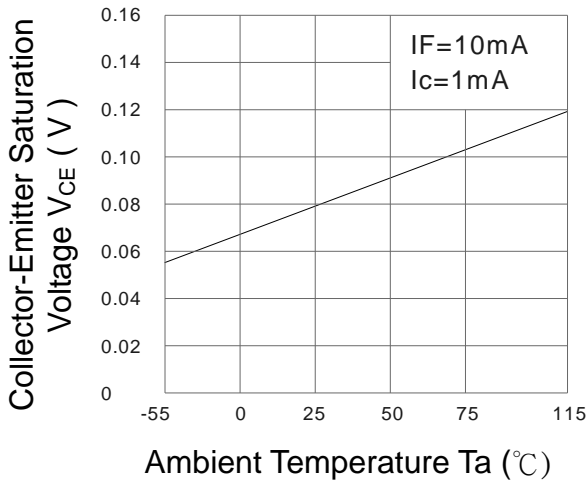


Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current

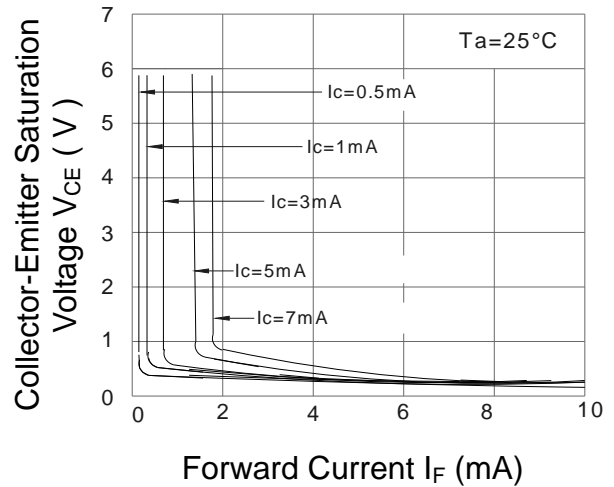


Fig.10 Response Time vs. Load Resistance


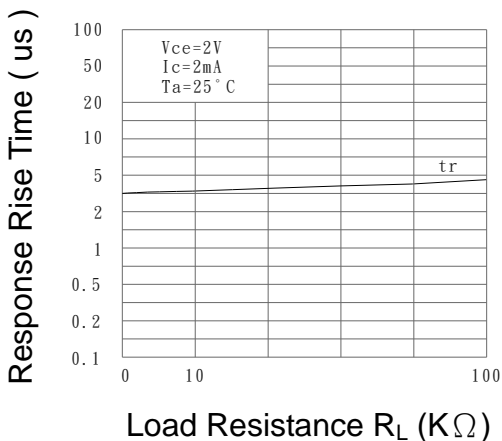


Fig.11 Response Time vs. Load Resistance

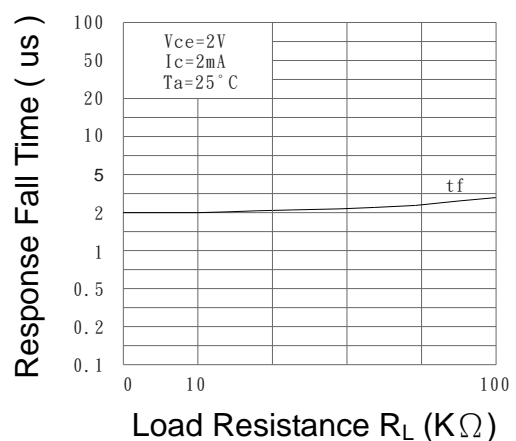

PRODUCT SPECIFICATION

DATE : 12/20/2012

cosmo ELECTRONICS CORPORATION	Photocoupler : KPC357NT0Z	NO.61P04119	REV.
		SHEET 6 OF 6	3

● Notice

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as :

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.