

# T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ( ± 5% ) 1:2CT & 1:2CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5		mH
Leakage Inductance		0.5	μH
Capacitance (C <sub>ww</sub> )		35	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		1.4	ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V<sub>RMS</sub> Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 33 pieces per tube

Surface mount version of this part available. Part# T-11048


**Primary Pins 14-12 & 5-7**

### PHYSICAL DIMENSIONS All dimensions in inches (mm):

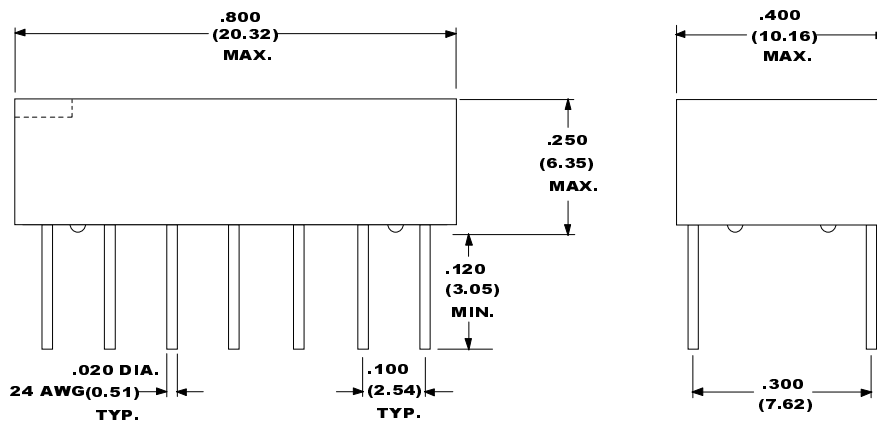

Unused pins not provided

### SCHEMATIC DIAGRAM:

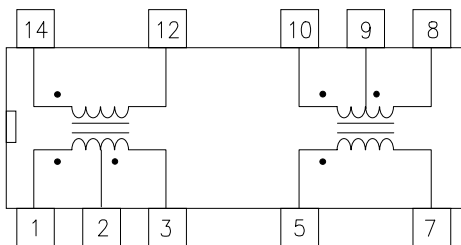

RHOMBUS P/N: <b>T-10148</b>	
CUST P/N:	NAME:
DATE: <b>2/23/98</b>	SHEET: 1 OF 1