



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989




E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

30A DUAL SCHOTTKY BARRIER RECTIFIERS

SRF30-03CT THRU SRF30-10CT

CASE : ITO-220AB(SRF30-XX), FULLY INSULATED PACKAGE

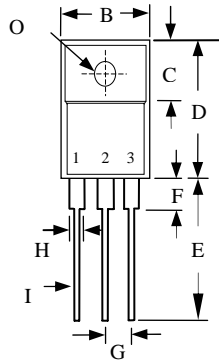

| | MILLIMETERS | |
|---|-------------|-------|
| | MIN | MAX |
| B | 9.72 | 10.27 |
| C | 6.30 | 6.90 |
| D | 14.50 | 15.50 |
| E | 13.00 | 13.80 |
| F | - | 4.1 |
| G | 2.41 | 2.67 |
| H | - | 1.52 |
| I | - | 0.9 |
| J | - | 4.8 |
| K | - | 3.1 |
| L | 2.5 | 2.9 |
| M | - | 0.8 |
| O | Ø3.4 | |

FEATURES

- EXTREMELY LOW VF
- LOW STORED CHARGE, MAJORITY CARRIER CONDUCTION
- LOW POWER LOSS / HIGH EFFICIENCY
- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND

MECHANICAL DATA

- CASE: TRANSFER MOLDED
- LEADS: SOLDERABLE PER MIL-STD-202,METHOD 208
- POLARITY: AS MARKED
- WEIGHT 2.05 GRAMS

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

| RATINGS | SYMBOL | SRF30-03CT | SRF30-035CT | SRF30-04CT | SRF30-045CT | SRF30-05CT | SRF30-06CT | SRF30-08CT | SRF30-09CT | SRF30-10CT | UNITS |
|--|-----------|---------------|-------------|------------|-------------|------------|------------|------------|------------|------------|-------|
| MAXIMUM RECURRENT PEAK REVERSE VOLTAGE | V_{RRM} | 30 | 35 | 40 | 45 | 50 | 60 | 80 | 90 | 100 | V |
| MAXIMUM RMS VOLTAGE | V_{RMS} | 21 | 24 | 28 | 31 | 35 | 42 | 56 | 63 | 70 | V |
| MAXIMUM DC BLOCKING VOLTAGE | V_{DC} | 30 | 35 | 40 | 45 | 50 | 60 | 80 | 90 | 100 | V |
| MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT SEE FIG.1 PER LEG | I_O | 30 15 | | | | | | | | | A |
| PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD PER LEG | I_{FSM} | 200 | | | | | | | | | A |
| STORAGE TEMPERATURE RANGE | T_{STG} | - 55 TO + 150 | | | | | | | | | °C |
| OPERATING TEMPERATURE RANGE | T_{OP} | - 55 TO + 125 | | | | | | | | | °C |

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^\circ C$ UNLESS OTHERWISE NOTED)

| CHARACTERISTICS | SYMBOL | SRF30-03CT | SRF30-035CT | SRF30-04CT | SRF30-045CT | SRF30-05CT | SRF30-06CT | SRF30-08CT | SRF30-09CT | SRF30-10CT | UNITS |
|---|--------|------------|-------------|------------|-------------|------------|------------|------------|------------|------------|-------|
| MAXIMUM FORWARD VOLTAGE AT 15A PER LEG | V_F | 0.60 | | | 0.70 | | | 0.85 | | | V |
| MAXIMUM REVERSE CURRENT AT 25°C PER LEG (NOTE 1) | I_R | 5.0 | | | | | | | | | mA |
| MAXIMUM REVERSE CURRENT AT 100°C PER LEG (NOTE 1) | I_R | 50.0 | | | | | | | | | mA |

THERMAL CHARACTERISTICS ($T_C = 25^\circ C$ UNLESS OTHERWISE NOTED)

| PARAMETER | SYMBOL | SRF30 | UNITS |
|---|-----------------|-------|-------|
| TYPICAL THERMAL RESISTANCE JUNCTION TO CASE PER LEG | $R_{\theta jc}$ | 4.0 | °C/W |

NOTES: 1. PULSE TEST: 300µS PULSE WIDTH, 1% DUTY CYCLE

RATINGS AND CHARACTERISTIC CURVES SRF30-03CT THRU SRF30-10CT

FIG. 1 - FORWARD DERATING CURVE

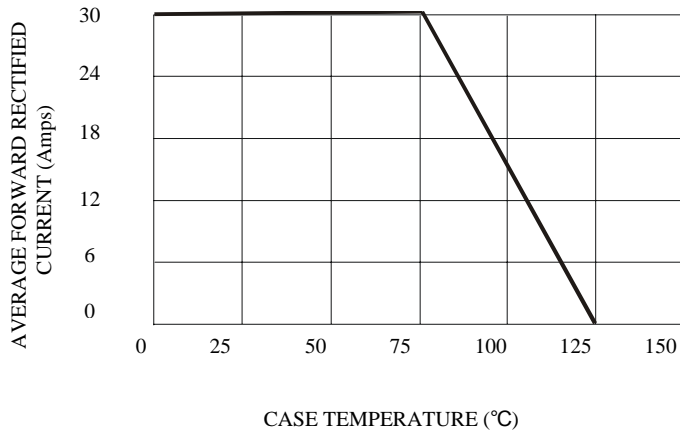


FIG. 2 - PEAK FORWARD SURGE CURRENT

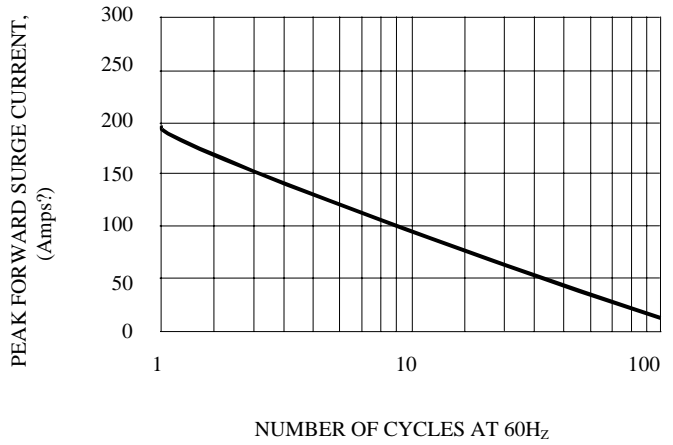


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

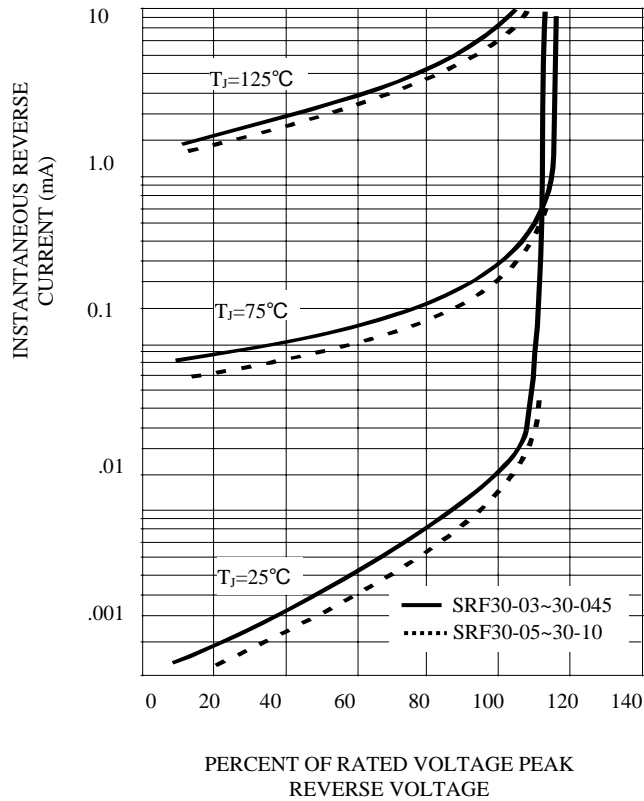


FIG. 4 - TYPICAL FORWARD CHARACTERISTIC

