

## FEATURES AND SPECIFICATIONS

### Features and Benefits

- Sizes 2 to 20 circuits

### Reference Information

Product Specification: PSX10-39  
 Packaging: Tray  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: 2599, 3003 and 3008 headers  
 Designed In: Inches

### Electrical

Voltage: 250V  
 Current: 7.0A  
 Contact Resistance: 20mΩ max.  
 Dielectric Withstanding Voltage: 1500V  
 Insulation Resistance: 500K MΩ min.

### Mechanical

Mating Force: 24 oz max.  
 Unmating Force: 4 oz min.  
 Normal Force: 350g  
 Durability: 25 cycles Tin

### Physical


Housing: Nylon, UL 94V-2  
 Contact: Phosphor Bronze  
 Plating: 1μm Tin/Lead and 0.5μm Gold  
 Operating Temperature: 0 to +75°C

**molex®** 5.08mm (.200") Pitch  
**KK®**


**PC Board Connector**

**3002**

**Right Angle  
 Mount Style A**

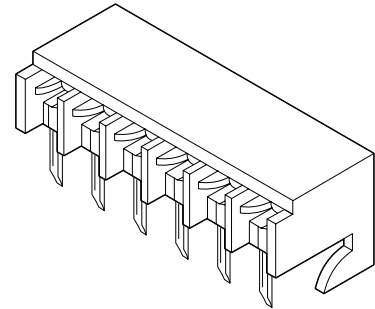

## CATALOG DRAWING (FOR REFERENCE ONLY)

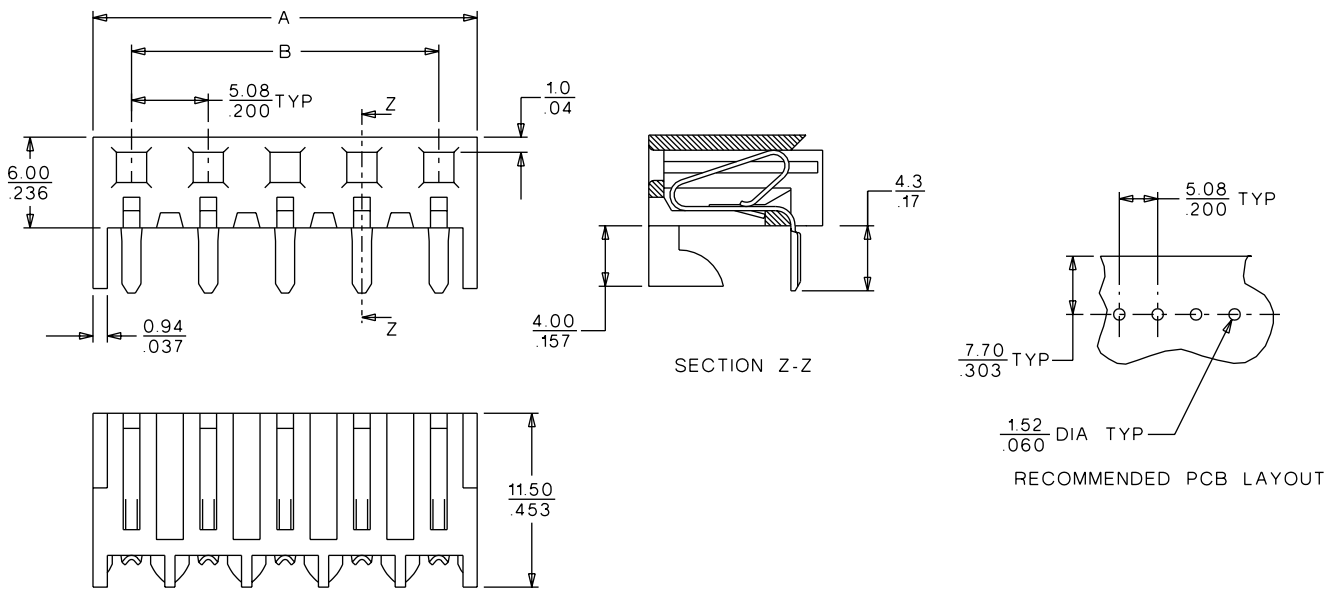

**D**  
 3.00 to 7.92mm (.118 to .312") Pitch

## ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Dimension	
	Tin	Gold	A	B
2	10-10-1021	10-10-1024	10.16 (.400)	5.08 (.200)
3	10-10-1031	10-10-1034	15.24 (.600)	10.16 (.400)
4	10-10-1041	10-10-1044	20.32 (.800)	15.24 (.600)
5	10-10-1051	10-10-1054	25.40 (1.000)	20.32 (.800)
6	10-10-1061	10-10-1064	30.48 (1.200)	25.40 (1.000)
7	10-10-1071	10-10-1074	35.56 (1.400)	30.48 (1.200)
8	10-10-1081	10-10-1084	40.64 (1.600)	35.56 (1.400)
9	10-10-1091	10-10-1094	45.72 (1.800)	40.64 (1.600)
10	10-10-1101	10-10-1104	50.80 (2.000)	45.72 (1.800)
11	10-10-1111	10-10-1114	55.88 (2.200)	50.80 (2.000)

Circuits	Order No.		Dimension	
	Tin	Gold	A	B
12	10-10-1121	10-10-1124	60.96 (2.400)	55.88 (2.200)
13	10-10-1131	10-10-1134	66.04 (2.600)	60.96 (2.400)
14	10-10-1141	10-10-1144	71.12 (2.800)	66.04 (2.600)
15	10-10-1151	10-10-1154	76.20 (3.000)	71.12 (2.800)
16	10-10-1161	10-10-1164	81.28 (3.200)	76.20 (3.000)
17	10-10-1171	10-10-1174	86.36 (3.400)	81.28 (3.200)
18	10-10-1181	10-10-1184	91.44 (3.600)	86.36 (3.400)
19	10-10-1191	10-10-1194	96.52 (3.800)	91.44 (3.600)
20	10-10-1201	10-10-1204	101.60 (4.000)	96.52 (3.800)

Plating: 1.00 microns Tin/Lead / 2.00 microns Copper min. (.000040" Tin/Lead / .000080" Copper min.) or 0.50 microns Gold / 0.75 microns Nickel min. (.000020" Gold / .000030" Nickel min.)