



EVERLIGHT ELECTRONICS CO.,LTD.

DATA SHEET

MODEL NO : 1224SYGC/S530-E2

DATE : 2000/6/14

DEPARTMENT : CHR&D1

REVISION : 1

RECEIVED			
<input checked="" type="checkbox"/> MASS PRODUCTION			
<input type="checkbox"/> PRELIMINARY			
<input type="checkbox"/> CUSTOMER DESIGN			
DEVICE NUMBER :		CDLE-122-078	
PAGE :		4	
CUSTOMER	DESIGNER	CHECKER	APPROVER
	钟祥至 2000.6.15	/	

1		2000/6/14
REV	DESCRIPTION	RELEASE DATE

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan
 Bonded Pricessing Zone Pan Yu, Guang Zhou, China
 TEL : (020)84860913,84860914
 FAX : (020)84860600
 http : //www.everlight.com



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-078 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224SYGC/S530-E2 ECN : _____ Page: 1/4

■ Features :

- Popular T- 3/4 diameter package
- Choice of various viewing angles
- Available on tape and reel
- Reliable and robust


■ Descriptions :

- The series is specially designed for applications requiring higher brightness
- The LED lamps are available with different colors, intensities, epoxy colors, etc.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

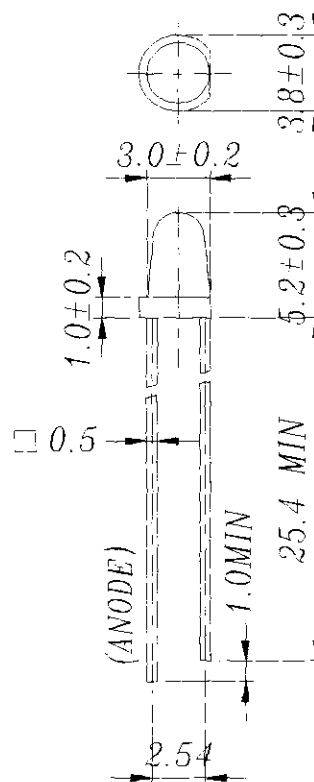

■ Notes :

- 1.All dimensions are in millimeters.
- 2.An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.

PART NO	Chip		Lens Color
	Material	Emitted Color	
1224SYGC/S530-E2	AlGaInP	Super Yellow Green	Water Clear

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan
 Bonded Pricessing Zone Pan Yu, Guang Zhou, China
 TEL : (020)84860913,84860914
 FAX : (020)84860600
 http : //www.everlight.com



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-078 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224SYGC/S530-E2 ECN : Page: 2/4

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA
Reverse Voltage	Vr	5	V







■ Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	63.00	100.00	/	mcd	If= 20 mA
Viewing Angle	2θ 1/2	/	25	/	deg	If= 20 mA
Peak Wavelength	λp	/	575	/	nm	If= 20 mA
Dominant Wavelength	λd	/	573	/	nm	If= 20 mA
Spectrum Radiation Bandwidth	Δλ	/	20	/	nm	If= 20 mA
Forward Voltage	Vf	1.70	2.00	2.40	V	If= 20 mA
Reverse Current	Ir	/	/	10	μA	Vr= 5 V



3.0mm Round Type LED Lamps

■ Typical Electro-Optical Characteristic Curves:

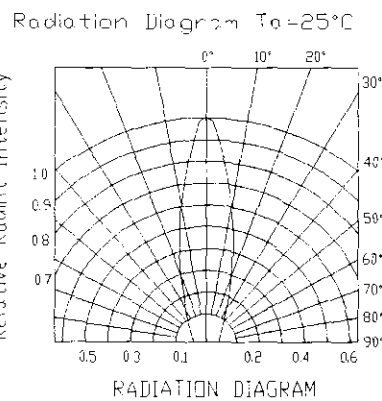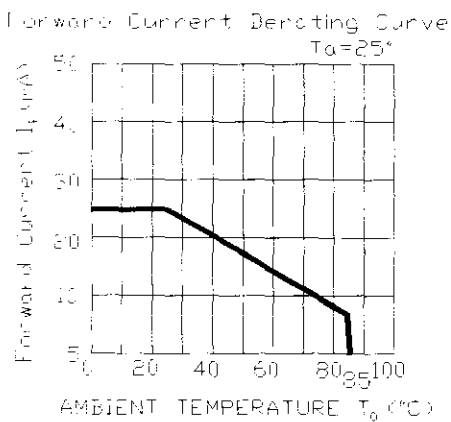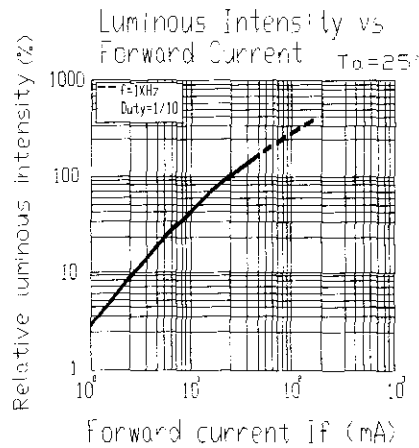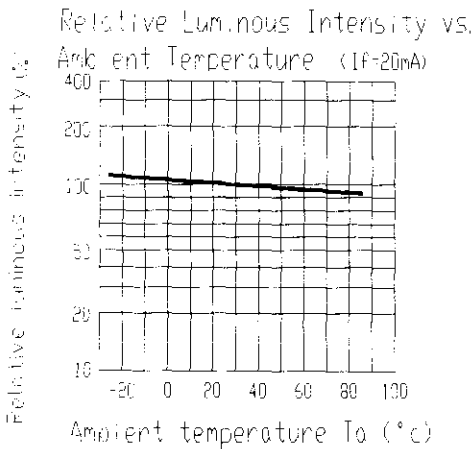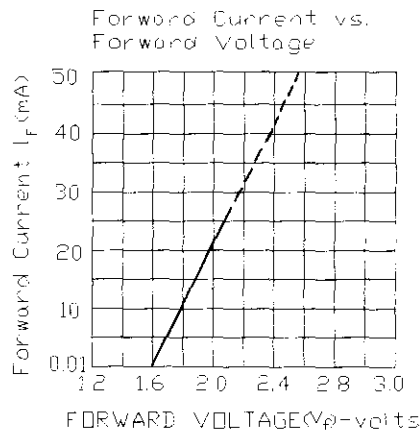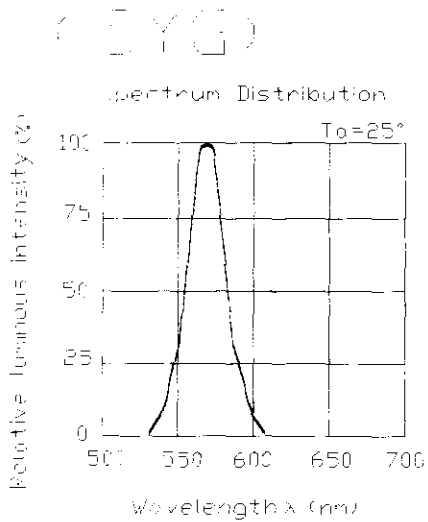



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-122-078 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1224SYGC/S530-E2 ECN : _____ Page: 4/4

■ Reliability test items and conditions:

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 pcs	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 pcs	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 pcs	0/1