


SAW Bandpass Filter F8681



Features

- RF bandpass filter
- High attenuation
- Usable bandwidth 4MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package

Package Dimensions

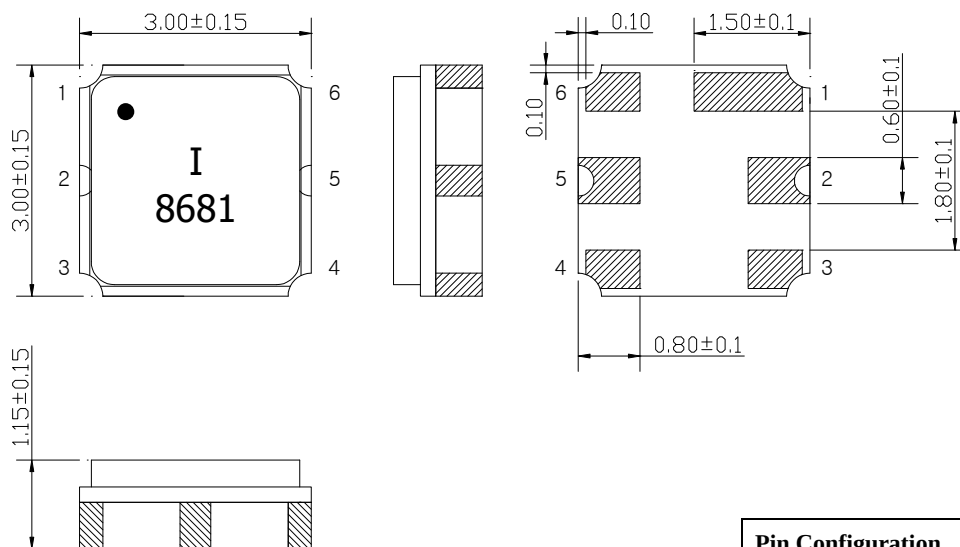

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 μm, Over a 1.27 ~ 8.89 μm
Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20	25	50
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	22

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8681	
		Rev. Date	2008-08-11	
		Rev.	NS6008-AS03	1/7

SAW Bandpass Filter F8681



Specifications

$F_c = 868.0\text{MHz}$

Terminating source impedance : 50Ω

Terminating load impedance : 50Ω

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	868.0	-
Insertion Loss ($F_c \pm 2.0\text{ MHz}$)	dB	-	4.0	4.5
Amplitude Ripple ($F_c \pm 2.0\text{ MHz}$)	dB	-	0.5	1.0
VSWR ($F_c \pm 2.0\text{ MHz}$)		-	1.5	2.0
Relative Attenuation				
... $F_c - 400 \sim - 40.8\text{ MHz}$	dB	47	50	-
$F_c + 50 \sim + 400\text{ MHz} \sim$...		40	50	

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8681	
		Rev. Date	2008-08-11	
		Rev.	NS6008-AS03	2/7

SAW Bandpass Filter F8681



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

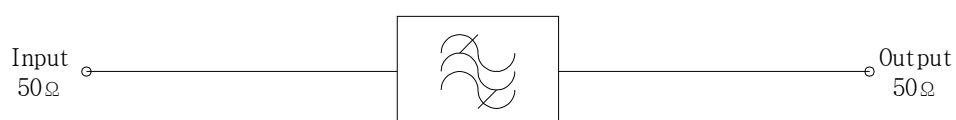

Marking Configuration

● ¹⁾
I ²⁾
8681 ³⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Marking Number



* Ink or Laser Marking available

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8681	
		Rev. Date	2008-08-11	
		Rev.	NS6008-AS03	3/7

SAW Bandpass Filter F8681



Typical Performance (at 25°C)

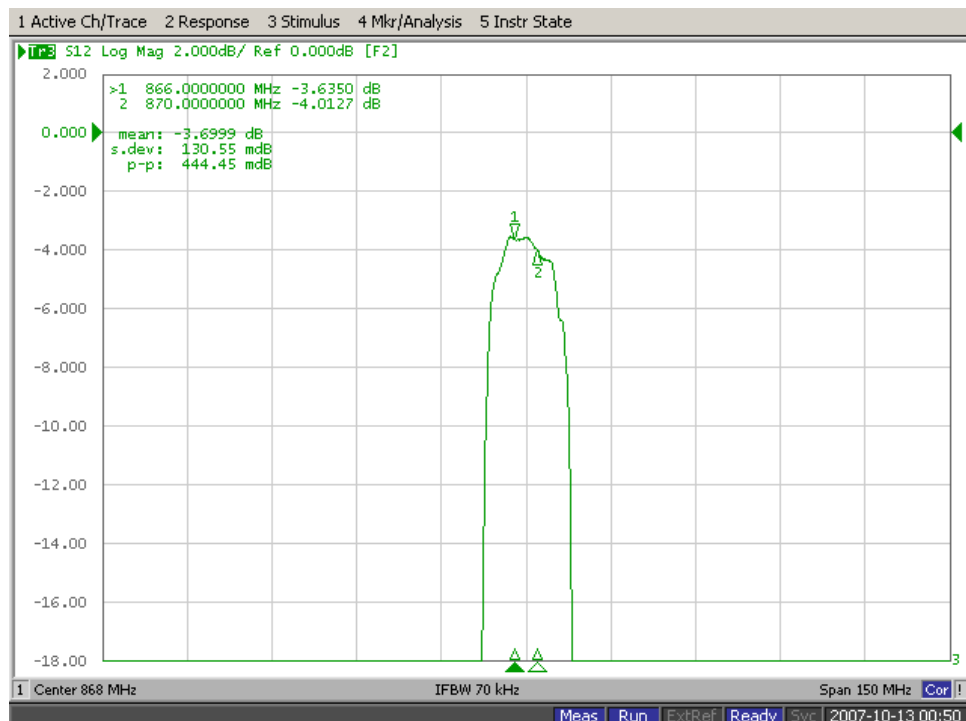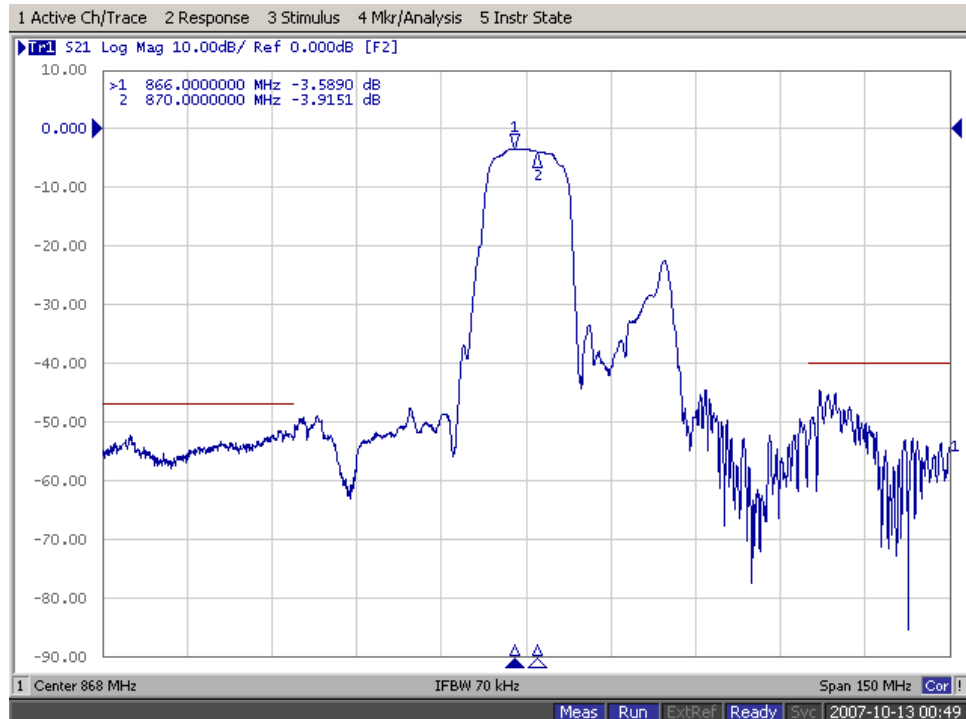



ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	F8681		
Rev. Date	2008-08-11		
Rev.	NS6008-AS03	4/7	



SAW Bandpass Filter F8681



Input / Output VSWR Charts

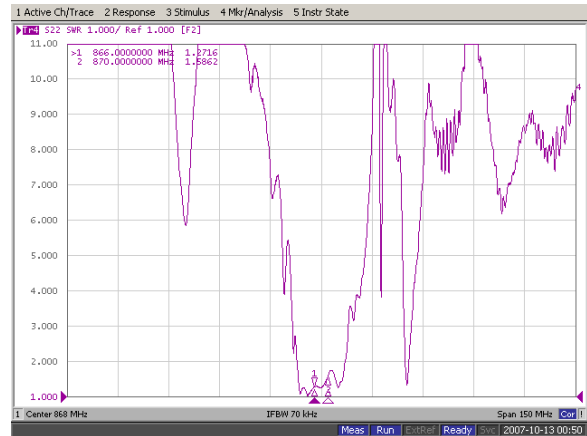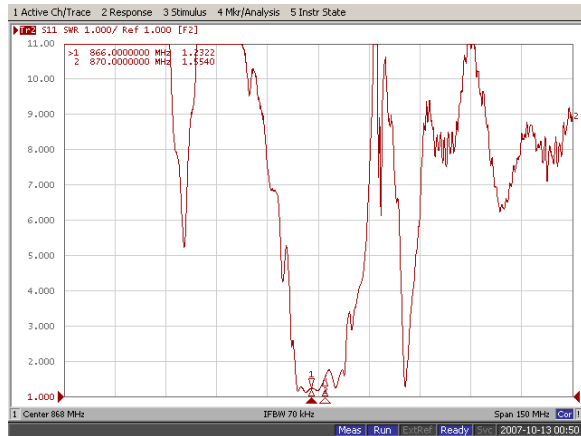

Input / Output Smith Charts

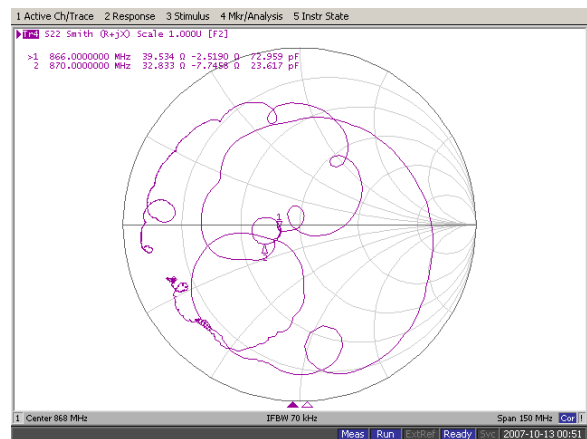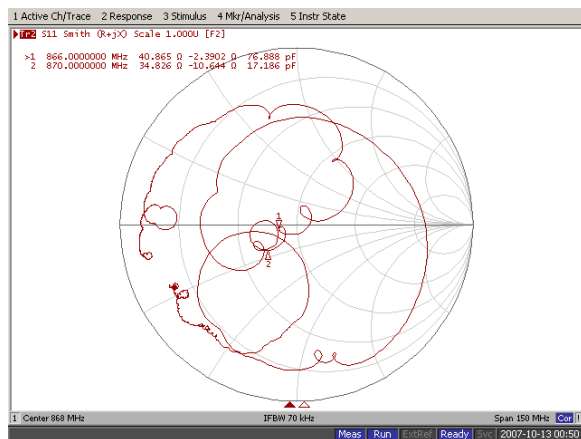


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.	F8681	
			Rev. Date	2008-08-11	
			Rev.	NS6008-AS03	5/7

SAW Bandpass Filter F8681




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

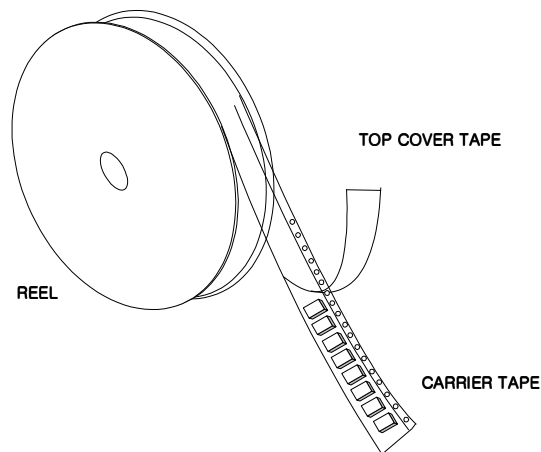

Tape Specification

1. Leader part and vacant position specification

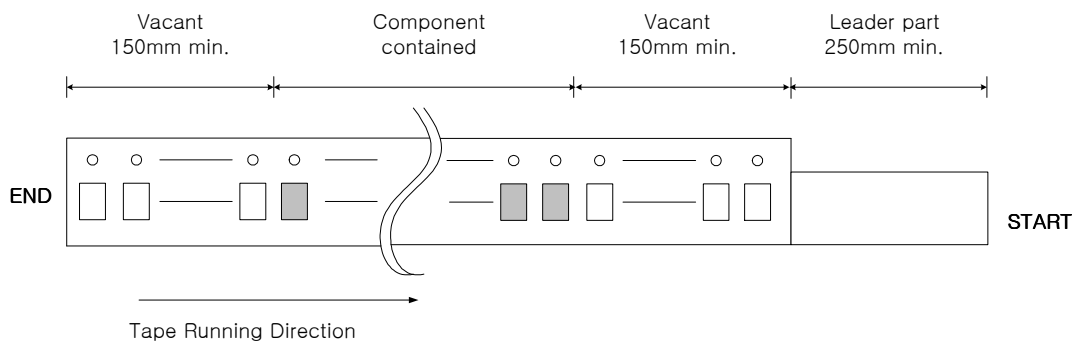


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : $0 \sim 15^\circ$
- 2) speed : 300mm/min
- 3) force : 20~70g

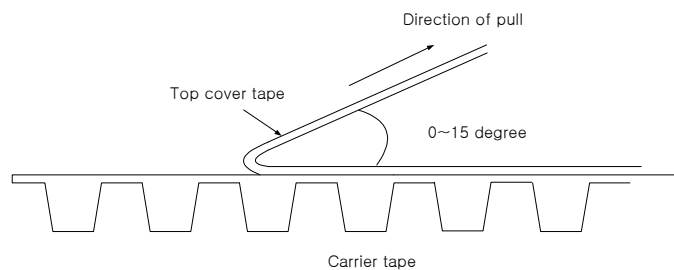


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8681	
		Rev. Date	2008-08-11	
		Rev.	NS6008-AS03	6/7

SAW Bandpass Filter F8681




Carrier Tape Dimensions [unit : mm]

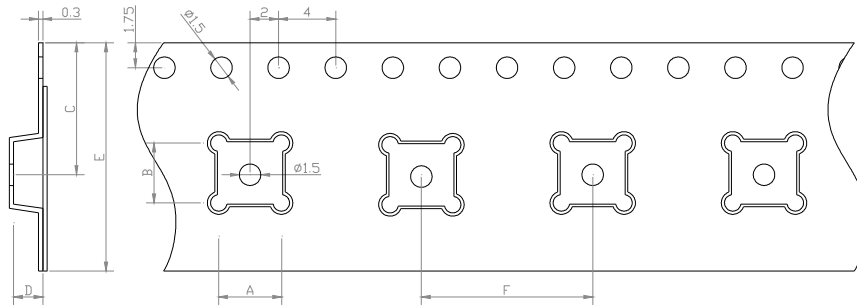


A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

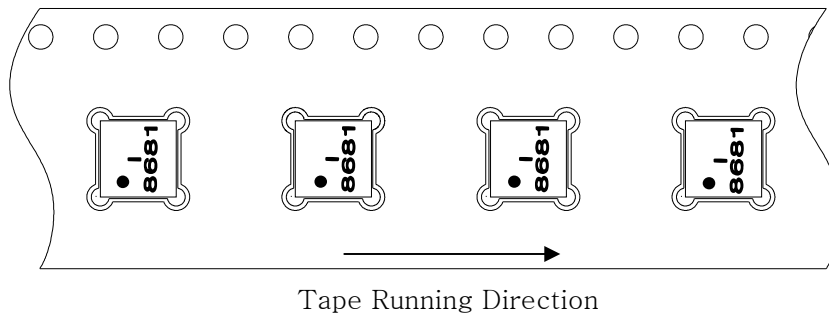

Reel Dimensions [unit : mm]

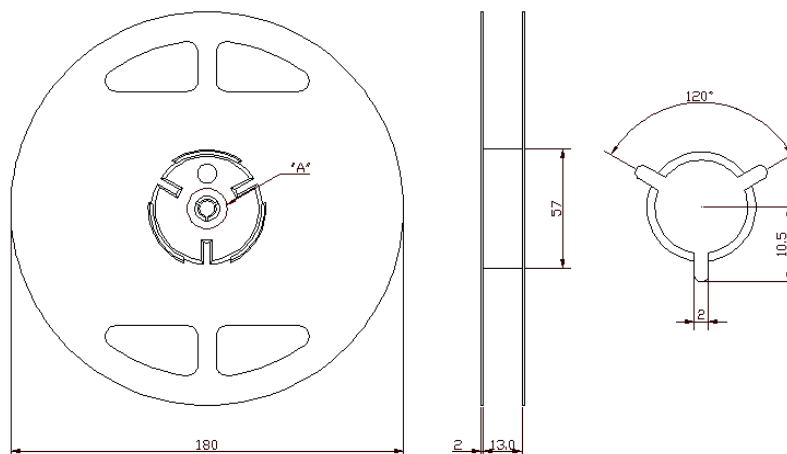

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F8681	
		Rev. Date	2008-08-11	
		Rev.	NS6008-AS03	7/7