
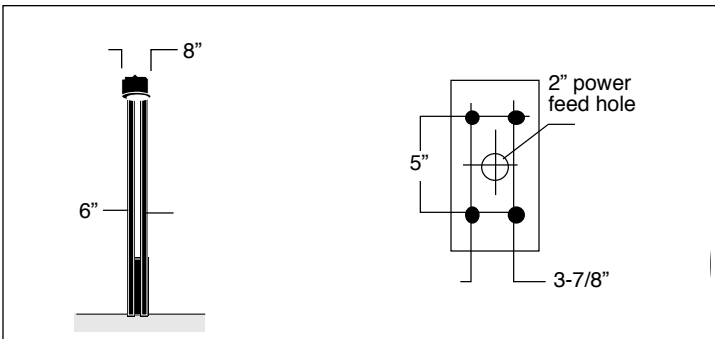


### Specification


All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)  
 Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1 - Cast aluminum sealed top cover.
- 2 - 8" dia. cast aluminum housing.
- 3 - Cast aluminum sealed removable glass lens frame, with perimeter memory retention embedded silicone gasket.
- 4 - Tempered clear glass lens.
- 5 - Semi-specular aluminum reflector.
- 6 - 2" x 2" extruded square aluminum twin bollard stands.
- 7 - One piece heavy cast aluminum triangular bollard base.
- 8 - Aluminum flush mount sealed access cover plate with socket flat head stainless steel screws.
- 9 - Set of four 1/2" -13 x 18" lg. galvanized anchor bolts.

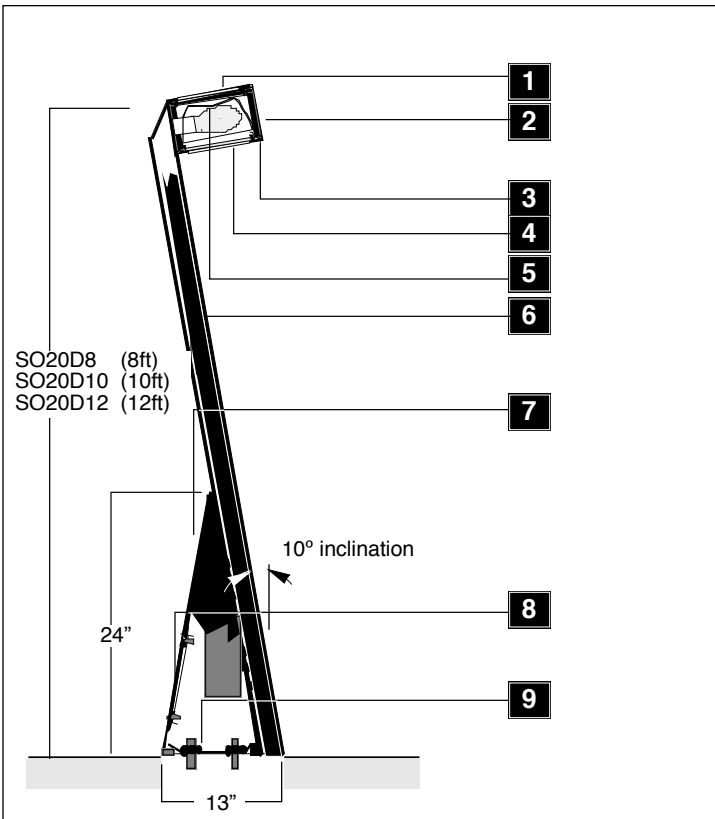

### Photometry



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on [www.luminis.com](http://www.luminis.com).

For options details and specifications, please refer to pages **72 & 128**

**Certification** UL. Wet Location. **Mounting** Set of four 3/4"-10 x 18" lg. galvanized anchor bolts.

Model#	Light source selection	Voltage	Finish	Options
<input type="checkbox"/> SO20D8 <input type="checkbox"/> SO20D10 <input type="checkbox"/> SO20D12	<div style="display: flex; justify-content: space-between;"> <div> <p><b>MH (ED17)</b></p> <input type="checkbox"/> M50  <input type="checkbox"/> M70  <input type="checkbox"/> M100  <input type="checkbox"/> M150  <input type="checkbox"/> M175  <p><b>HPS (ED17)</b></p> <input type="checkbox"/> H50  <input type="checkbox"/> H70  <input type="checkbox"/> H100  <input type="checkbox"/> H150</div> <div> <p><b>MH (G12) T6</b></p> <input type="checkbox"/> M39T  <input type="checkbox"/> M70T  <input type="checkbox"/> M150T</div> </div> <p>(Lamps by others)</p>	<p><b>120 V</b> Standard factory prewired (If no voltage is specified)                      For other voltages, please specify with catalog number.</p> <p><b>H.I.D.</b>    <b>H.I.D. G12/T6</b></p> <input type="checkbox"/> 208 V <input type="checkbox"/> 120 V <input type="checkbox"/> 240 V <input type="checkbox"/> 277 V <input type="checkbox"/> 277 V <input type="checkbox"/> 347 V <p>Note: 50W.HPS is available with 120/277V only.</p>	<p>(Refer to color chart)</p> <p><u>Standard selection</u></p> <input type="checkbox"/> <b>WHT</b> : Snow white <input type="checkbox"/> <b>BKT</b> : Jet black <input type="checkbox"/> <b>BZT</b> : Bronze <input type="checkbox"/> <b>GRT</b> : Titanium gray <input type="checkbox"/> <b>DGT</b> : Gun metal <input type="checkbox"/> <b>CHT</b> : Champagne <input type="checkbox"/> <b>MST</b> : Matte silver <input type="checkbox"/> <b>GNT</b> : Forest green <p><u>Optional colors</u></p> <input type="checkbox"/> <b>CS</b> : Custom color <input type="checkbox"/> <b>RAL</b> : RAL# color	<input type="checkbox"/> <b>FS</b> : <b>Electrical Fuse</b>

luminaires may be altered for design improvements or discontinued without prior notice.