

# **STN2222SF**

**NPN Silicon Transistor** 


### **Description**

- General purpose application
- Switching application

#### **Features**

- Large collector current
- Low collector saturation voltage
- Complementary pair with STN2907SF

#### **PIN Connection**

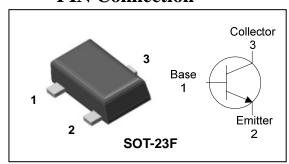

### **Ordering Information**

STN2222SF $\frac{\text{HA}}{0} \frac{\square}{2}$ SOT-23F	Type NO.	Marking	Package Code
	STN2222SF		SOT-23F

① Device Code ② Year&Week Code

### **Absolute maximum ratings**

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	60	V
Collector-Emitter voltage	$V_{CEO}$	30	V
Emitter-base voltage	$V_{EBO}$	5	V
Collector current	I <sub>C</sub>	600	mA
Collector dissipation	P <sub>C</sub> *	350	mW
Junction temperature	Tj	150	°C
Storage temperature	T <sub>stg</sub>	-55~150	°C

<sup>\* :</sup> Package mounted on 99.5% Alumina 10×8×0.1

#### **Electrical Characteristics**

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV <sub>CBO</sub>	$I_C = 10 \mu A, I_E = 0$	60	-	-	V
Collector-Emitter breakdown voltage	BV <sub>CEO</sub>	$I_C=10$ mA, $I_B=0$	30	-	-	V
Emitter-Base breakdown voltage	BV <sub>EBO</sub>	$I_E = 10 \mu A, I_C = 0$	5	-	-	V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =60V, I <sub>E</sub> =0	-	-	10	nA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =10mA	75	-		-
Collector-Emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA	-		0.4	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =20V, I <sub>C</sub> =20mA	250	-	-	MHz
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz	-	6.0	-	pF

#### **Electrical Characteristic Curves**

Fig. 1 Pc - Ta

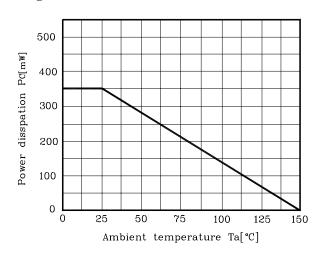


Fig. 2  $I_{\rm C}$  -  $V_{BE}$ 

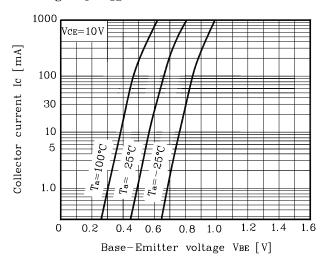


Fig. 3  $I_{\text{C}}$  -  $V_{\text{CE}}$ 

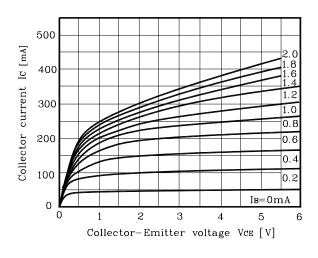


Fig. 4  $V_{CE(SAT)}$  -  $I_C$ 



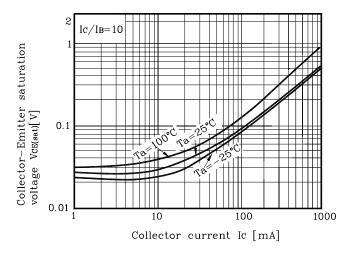


Fig. 5  $h_{FE}$  -  $I_{C}$ 

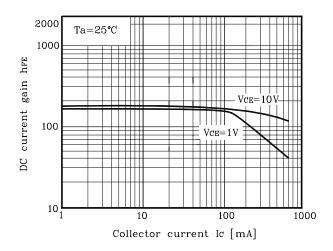


KSD-T5C078-000 2

## **Outline Dimension**

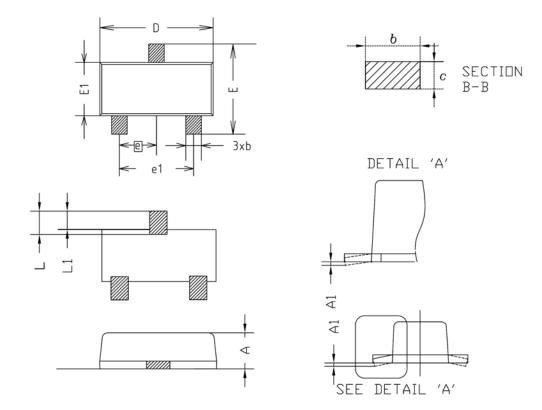

SYMBOL	MILLIMETER(mm)			NOTE	
STADUL	MINIMUM	NDMINAL	MAXIMUM	NUIL	
Α	0.80	0.90	1.00		
A1	0.00	_	0.10		
b	0.35	0.40	0.45		
C	0.10	0.15	0.20		
D	2.80	2.90	3.00		
Ε	2.30	2.40	2.50		
E1	1.50	1.60	1.70		
е	0.95BSC				
e1	1.80	1.90	2.00		
L	0.48	0.58	0.68		
L1	0.30	-	0.50		

#### \*Recommend PCB solder land [Unit: mm]

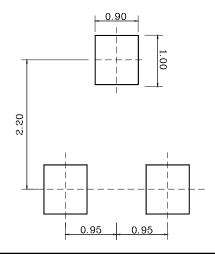

KSD-T5C078-000

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

KSD-T5C078-000