

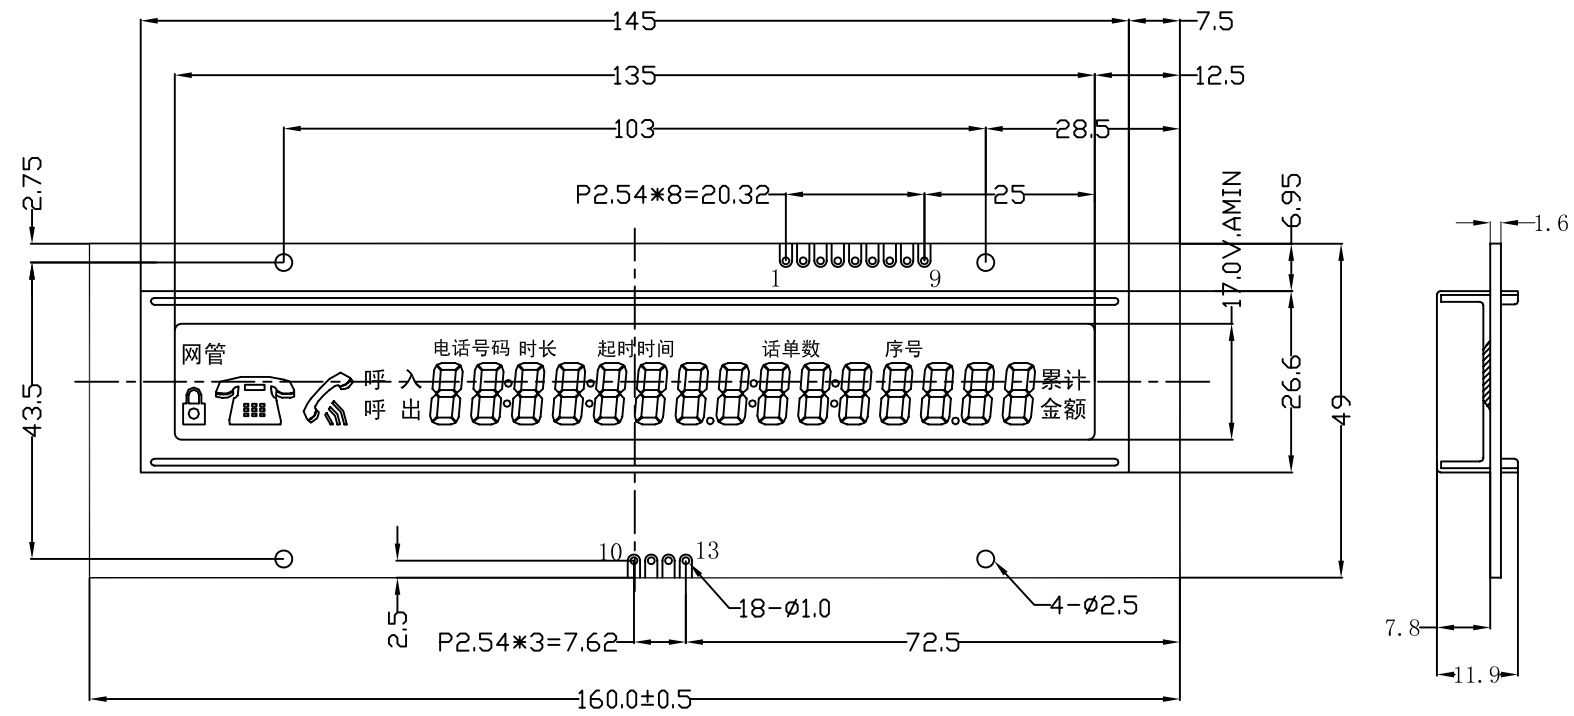


REV.	CHANGE CONTENT	BY	DATE

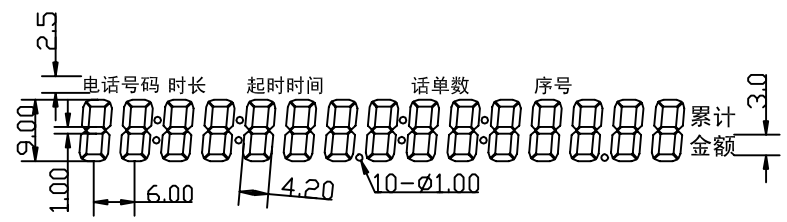

NO. PIN	1	2	3	4	5	6	7	8	9
SYMBOL	KEY1	KEY2	KEY3	KGND	GND	VCC	DATA	CLK	/CS
NO. PIN	10	11	12	13					
SYMBOL	KEY1	KEY2	KEY3	KGND					




NOTE:
 DISPLAY TYPE : TN TRANSMISSIVE-POSITIVE
 VIEWING DIRECTION : 6: 00
 OPERATING VOLT. : VDD=5V;VOP=5V
 OPERATING TEMP. : 0°C ~ +50°C
 STORAGE TEMP. : -10°C ~ +60°C
 DRIVE METHOD : 1/4 DUTY 1/3 BIAS
 DRIVE IC : HT1621
 LED : 琥珀色 1.9V

TOLERANCE		HTDISPLAY CO., LTD.			DRAWING No.: HS0019C-NT60L-VA		
>0~6	±0.10				DRAWING TITLE: LCM		
>6~80	±0.20	DESIGN	LZM	06.03.20	TECHNOLOGY	REV.: A	SCALE : -/-
>80~240	±0.30	CHECKED			Q.A	PROJECTION:	UNIT : mm
>240~400	±0.50	STANDARD			APPROVED		SHEET : 1/2
// ⊥ ⊙ ±0.10							

REV.	CHANGE CONTENT	BY	DATE

www.DataSheet4U.com

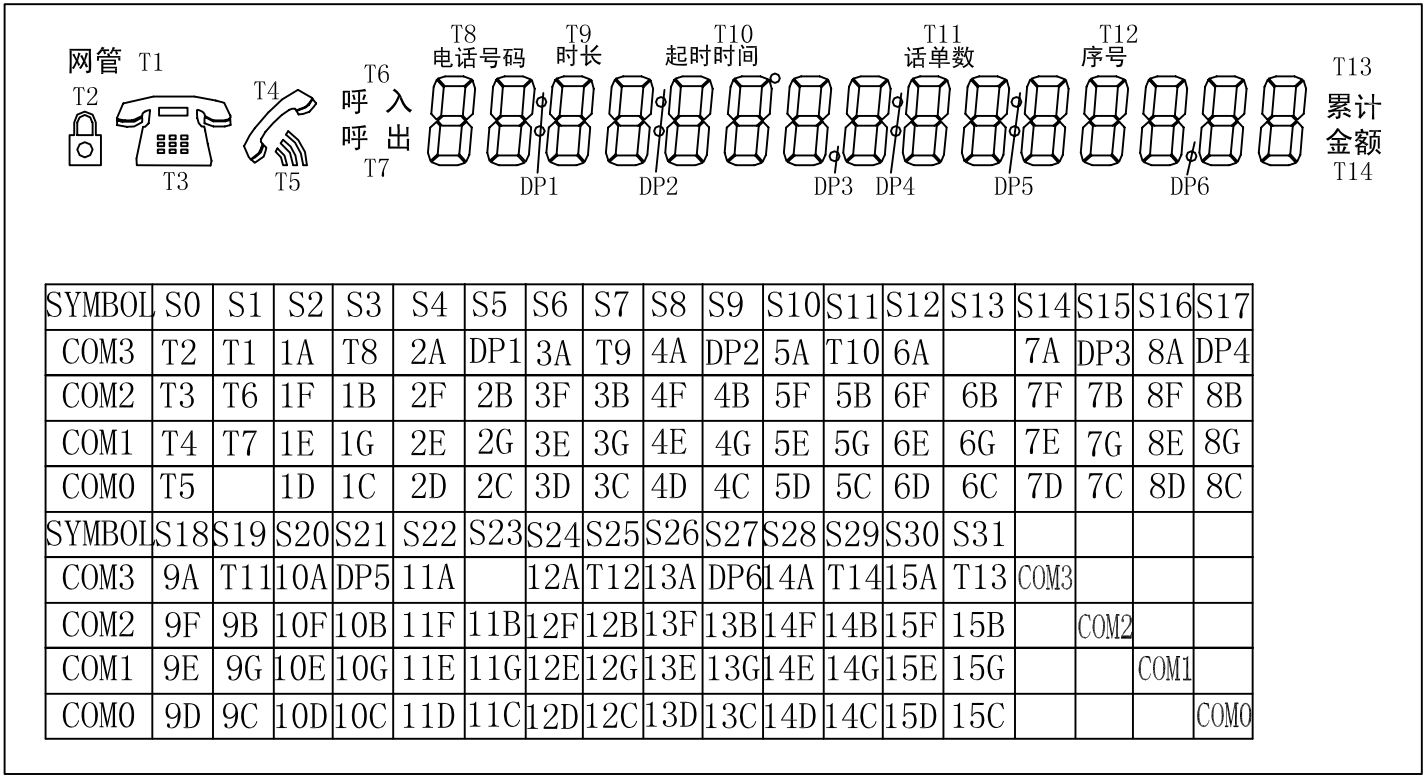

www.DataSheet4U.com

www.DataSheet4U.com

www.DataSheet4U.com

www.DataSheet4U.com

TOLERANCE			HTDISPLAY CO., LTD.			DRAWING No.: HS0019C-NT60L-VA	
>0~6	±0.10					DRAWING TITLE: LCM	
>6~80	±0.20		DESIGN	LZM	06.03.20	TECHNOLOGY	REV.: A
>80~240	±0.30	CHECKED			Q.A	PROJECTION:	UNIT : mm
>240~400	±0.50	STANDARD			APPROVED		SHEET : 2/2
// ⊥ ⊙ ±0.10							