

CATV Bandpass Filter
50 - 870 / 975 - 1025 / 1125 - 1425MHz

MAFLCT0081
V1P


Features

- 50 Ohm
- SMT unit
- RoHS* Compliant

Description

M/A-COM's MAFLCT0081 is a surface mount Bandpass filter unit designed for MoCA applications.

Functional Schematic

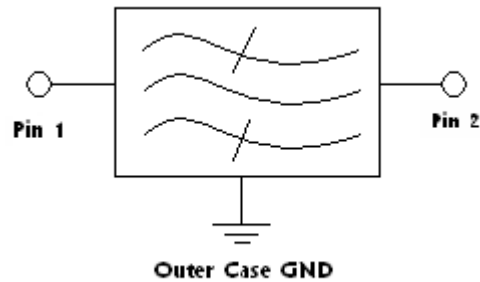

Pin Configuration

Function	Pin Number
Input Port	1
Output Port	2

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250mW
DC Current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

CATV Bandpass Filter
50 - 870 / 975 - 1025 / 1125 - 1425MHz

MAFLCT0081
V1P

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$


Parameter	Test Conditions	Units	Min	Typ	Max
Frequency Range	50-870 / 975 - 1025 / 1125-1425MHz				
Insertion Loss	975 - 1025MHz	dB		-1.1	-1.2
Stopband Rejection	50 - 870MHz	dB	-45	-65	
Stopband Rejection	1125 - 1425MHz	dB	-45	-56	
Input Return Loss	975 - 1025MHz	dB	-16	-18	

CATV Bandpass Filter
50 - 870 / 975 - 1025 / 1125 - 1425MHz

MAFLCT0081
V1P

Typical Performance Curves

Insertion Loss

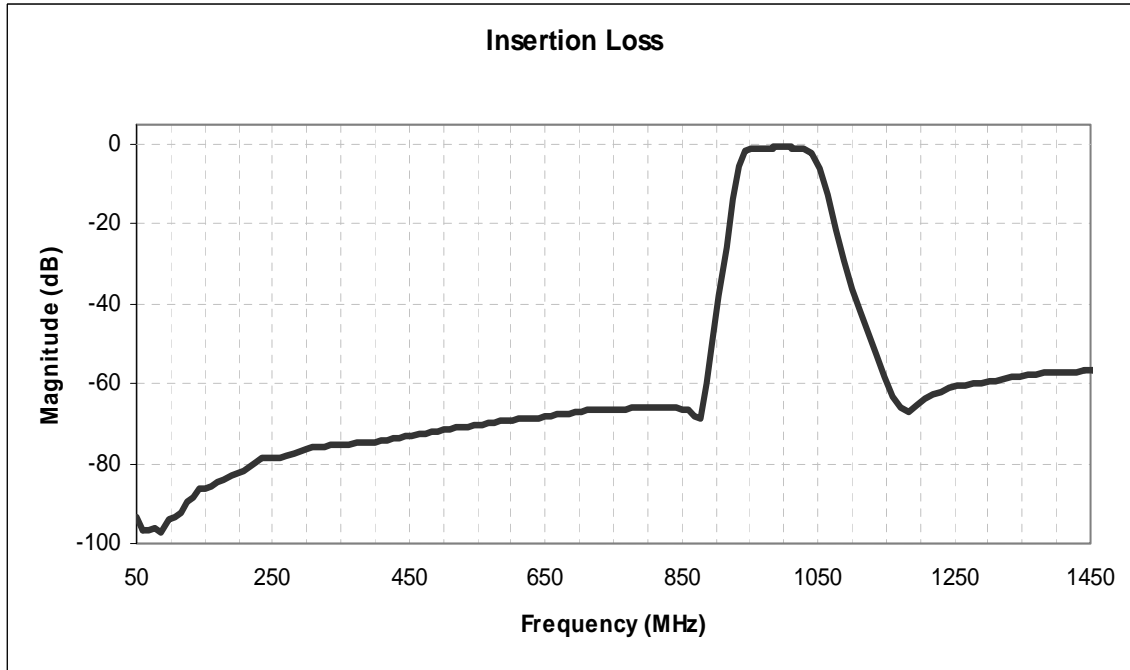

Input Return Loss

