

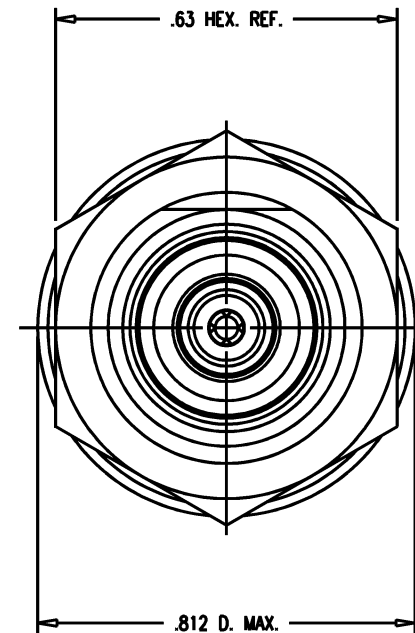


SD

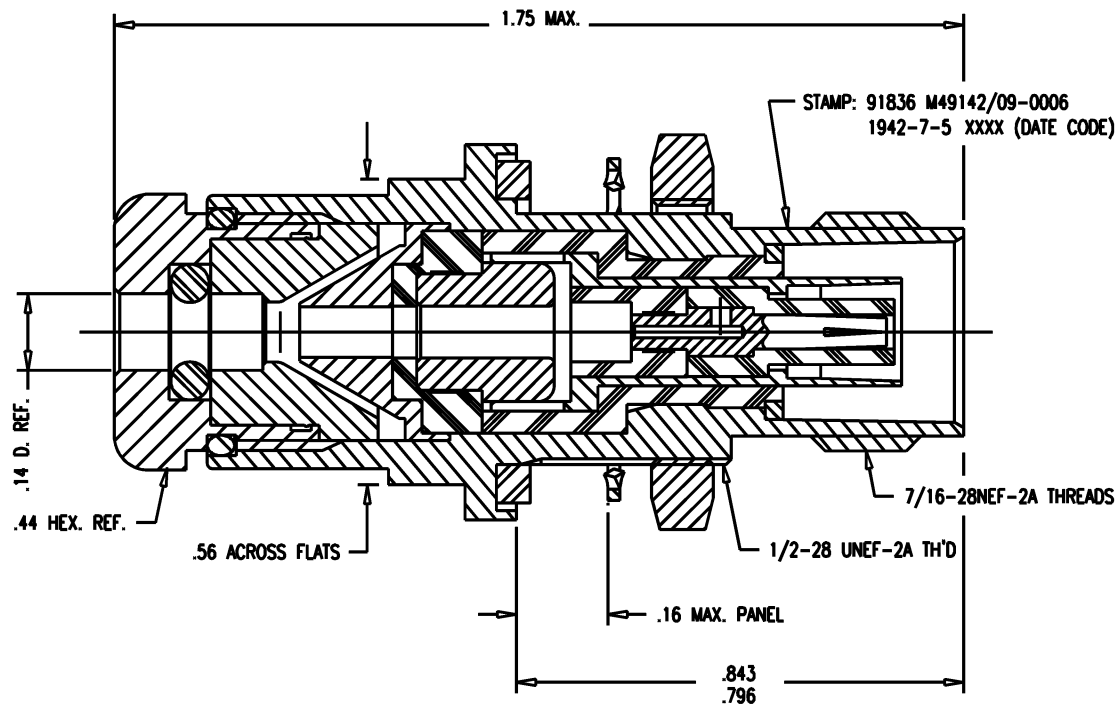

NOTES:

1. FOR USE WITH M17/176-00002 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-395.
3. INTERFACE PER MIL-STD-348, FIG. 202-2.
4. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-4894
 GASKETS & O-RINGS: SILICONE RUBBER, ZZ-R-765
 LOCKWASHER: PHOS. BRONZE, ASTM-B-103
 CONTACTS: BER. COP., ASTM-B-196
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
 CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
 WORKING VOLTAGE: 400 VRMS



MOUNTING HOLE

SD

M49142/09-0006

REVISIONS

ISSUE	CHANGES
4	CN 37318 D REDRAWN MRM 04/11/97

09-2006

SCALE 4:1

APPROX SURFACE AREA

1942-7-5

USED ON

REF:

JACK, BULKHEAD, TRT

DRAWN	JCA	DATE	11/09/93
DESIGN	TK	DATE	11/10/93
APPR.	VLS	DATE	11/15/93

KINGS
 ELECTRONICS CO., INC.
 TUCKAHOE, NEW YORK 10707

M49142/09-0006