



SOLDER CABLE CENTER CONDUCTOR TO BULLET CONTACT.

INSERT CABLE WITH FOIL ENTERING CONNECTOR AND BRAID OVER KNURL.

CRIMP FERRULE OVER BRAID WITH 0.213" HEX DIE.


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

6 - 30mm 30 - 120mm

<0.5mm 0.5 - 6mm

APPLY HEAT SHRINK TUBING OVER FERRULE.

HEAT SHRINK TUBING SHOULD FULLY (360 DEG) COVER THE BUMP ON BODY AND FND WITHIN ARFA "A'

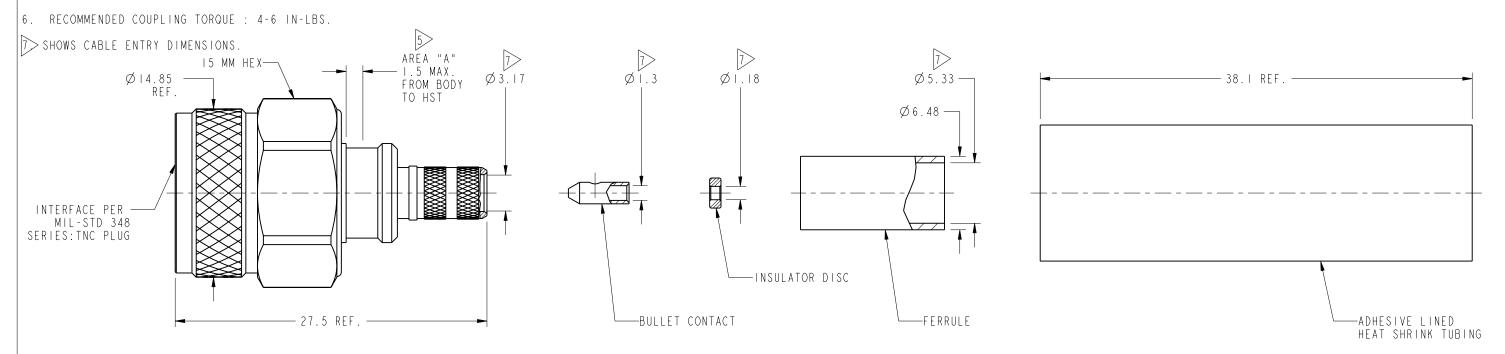

CABLE STRIPPING DIM'S

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATERIAL DATE TITLE DRAWN Amphenol RF | | - Ju | - | 2 R.MAO STR IP-67 TNC, PLUG ENGINEER DATE FOR LMR-200 CABLE www.amphenolrf.com D.DAVE 31 - Aug - 11

SCALE 3.000 MIN PASS THRU DIAMETER

 \pm 0.05mm $\pm\,$ 0 . Imm ± 0.2 mm NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp.' (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to REFERENCE APPROVED DATE DRAWING NO.31-6499 SCALE: 4.0:1.0 SHEET 2 OF 2 ITEM NO. 31-6499 CONFIGURATION LEVEL: CAD FILE DWG SIZE REV or disclosed by said drawings, specifications, or other data. PART NO. 31-6499 В FINISH