

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-14-1A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-14-1B: Brass, Nickel plated





PDSN-14-1C: Brass, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in
Polypropylene


ENVIRONMENTAL:

Operating temperature: -5°C to +83°C


RoHS
COMPLIANT

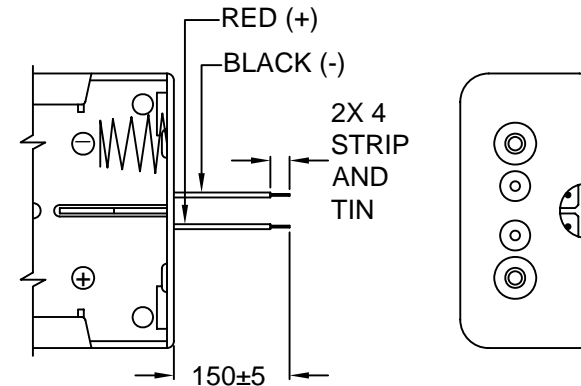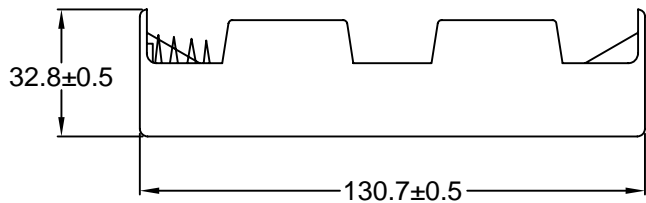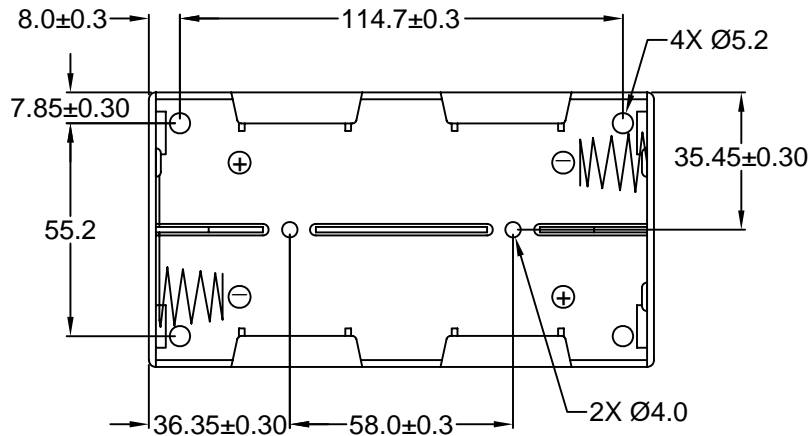

PDSN-14-1A WIRE LEADS

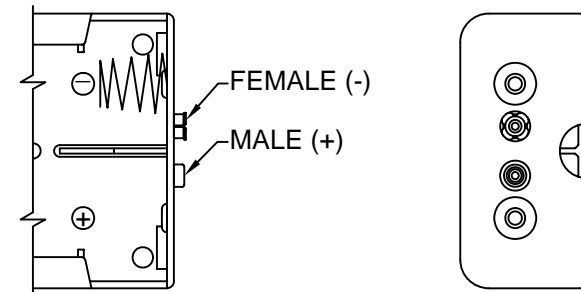

PDSN-14-1B SNAP TERMINAL

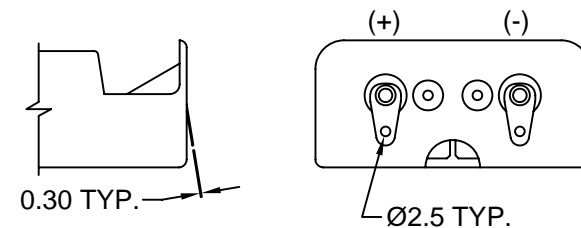

PDSN-14-1C SOLDER LUGS

REVISIONS
CHANGE
CHKG
CHK
APPR
REV
DATE

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 05/29/02
CHECK BY	TD	DATE: 05/30/02
APPR BY	PB	DATE: 05/30/02

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "D" BATTERY HOLDER

PDSN-14-1X		SHEET 1 of 1
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV:	

6

5

4

3

2

1