


# AX60530

6-slot ShoeBox Chassis

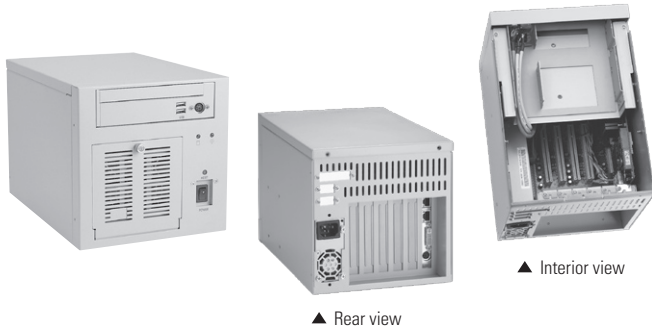


## Specifications

Standard Color	Beige (PANTONE 414C)
Construction	Heavy-duty steel
Drive Capacity	Exposed 1 x slim CD-ROM and 1 x 3.5" HDD drive bay, internal 1 x 3.5" HDD drive bay
Cooling	1 x 8 cm ball-bearing fan (38.6 CFM/each) with a removable filter
Front Panel Indicators	1 x power, 1 x HDDFront
Panel Controls	1 x system reset; 1 x power on/off
Front Panel Connectors	2 x USB & 1 x PS/2
Pre-punched Panel	2 x 9-pin & 1 x 25-pin
System Board	Half-size SBCs
Expansion Interface	6-slot ISA or PCI backplane
Hold-down Clamp	Rubber cushion
Operating Temperature Range	0°C ~ 40°C (32°F ~ 113°F)
Dimensions	191 mm (7.5") (W) x 273 mm (10.8") (D) x 195.7 mm (7.7") (H)
Weight (net/gross)	5.4 kg (11.9 lb)/6.8 kg (15 lb)

## Power Supply Specifications

Items	Watt	Input	Specifications	
			Output	MTBF
PS200-1U	ATX 200W (PFC)	AC90-264V (Auto)	+5V @ 17A +12V1 @ 6A +12V2 @ 12A -12V @ 0.8A +3.3 @ 14A +5VSB @ 2A	100,000 hours

## Dimensions

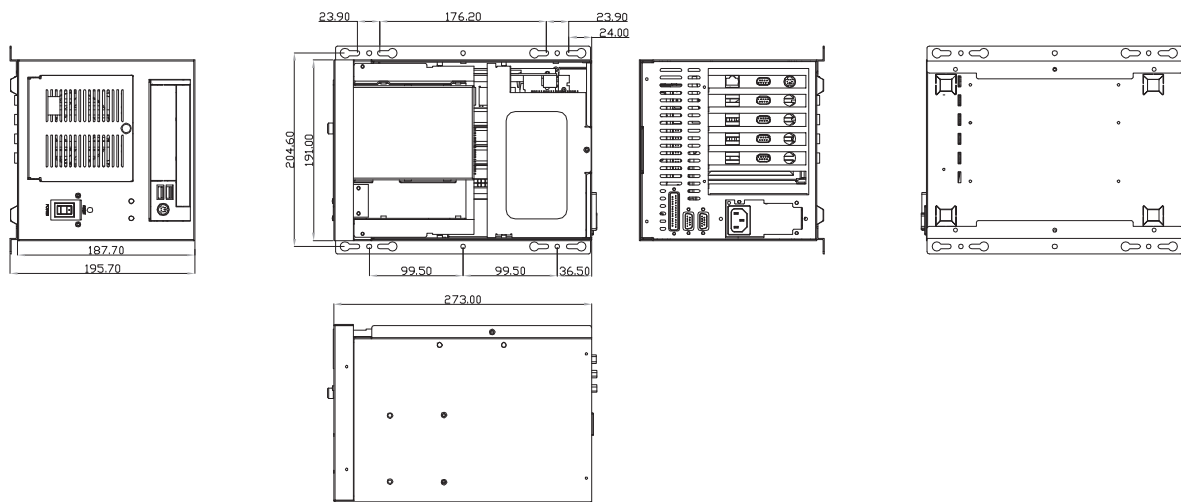

## Features

- Compact design for embedded applications
- Supports half-size SBCs
- Exposed one slim CD-ROM & one 3.5" HDD drive bay; internal one 3.5" HDD drive bay
- Equipped with ATX 200W power supply Easy-removable cooling fan

## Ordering Information

AX60530WB/X200P	With ATX 200W power supply
AX60530WB/X270P	With ATX 270W power supply

\*Specifications and certifications are based on options and may vary.

## Backplane Options

### PICMG 1.0

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
ATX6020/6	6/0/0	Single
ATX6021/5	0/4/1	Single

### PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
HAB206	0/3/1/1	Single

## Optional Items

ATX 270W power supply with PFC  
 59460530030E USB cable 2.54 to 2.0 Dupont 400 mm (SBC82810 only)  
 59460530040E USB cable 2.54 Dupont to 2.0 housing 400 mm (SBC82820, SBC82702, SBC82700, SHB210 only)