

General Description

The UI3001 is the highest performance trench P-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The UI3001 meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available


Product Summary

BV_{DS}	R_{DSON}	ID
-30V	42mΩ	-18A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

TO251 Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	-30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _C =25°C	Continuous Drain Current, -V _{GS} @ -10V ¹	-18	A
I _D @T _C =100°C	Continuous Drain Current, -V _{GS} @ -10V ¹	-10	A
I _{DM}	Pulsed Drain Current ²	-36	A
EAS	Single Pulse Avalanche Energy ³	59	mJ
I _{AS}	Avalanche Current	-19	A
P _D @T _C =25°C	Total Power Dissipation ⁴	20.8	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	62	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	5	°C/W

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-30	---	---	V
△BV _{DSS} /△T _J	BV _{DSS} Temperature Coefficient	Reference to 25°C , I _D =-1mA	---	-0.085	---	V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =-10V , I _D =-10A	---	35	42	mΩ
		V _{GS} =-4.5V , I _D =-4A	---	65	78	
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-1.0	-1.6	-2.5	V
△V _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	0.375	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25°C	---	---	1	uA
		V _{DS} =-24V , V _{GS} =0V , T _J =55°C	---	---	5	
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V , V _{DS} =0V	---	---	±100	nA
g _{fs}	Forward Transconductance	V _{DS} =-10V , I _D =-10A	---	6	---	S
Q _g	Total Gate Charge (-4.5V)	V _{DS} =-20V , V _{GS} =-4.5V , I _D =-12A	---	6.4	---	nC
Q _{gs}	Gate-Source Charge		---	2.7	---	
Q _{gd}	Gate-Drain Charge		---	3.1	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =-12V , V _{GS} =-10V , R _G =3.3Ω, I _D =-5A	---	9	---	ns
T _r	Rise Time		---	16.6	---	
T _{d(off)}	Turn-Off Delay Time		---	21	---	
T _f	Fall Time		---	21.6	---	
C _{iss}	Input Capacitance	V _{DS} =-15V , V _{GS} =0V , f=1MHz	---	655	---	pF
C _{oss}	Output Capacitance		---	290	---	
C _{rss}	Reverse Transfer Capacitance		---	115	---	

Guaranteed Avalanche Characteristics

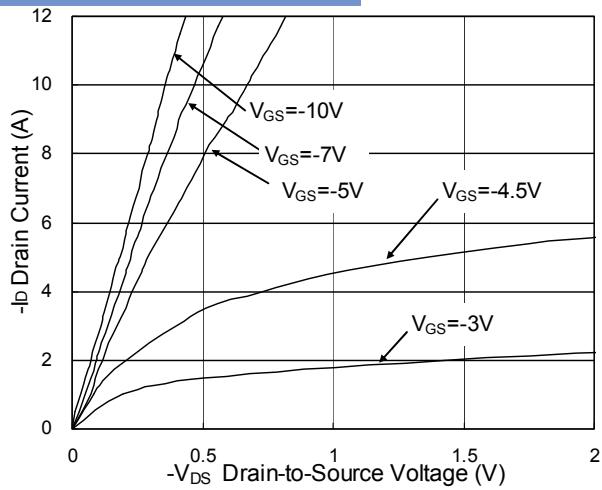
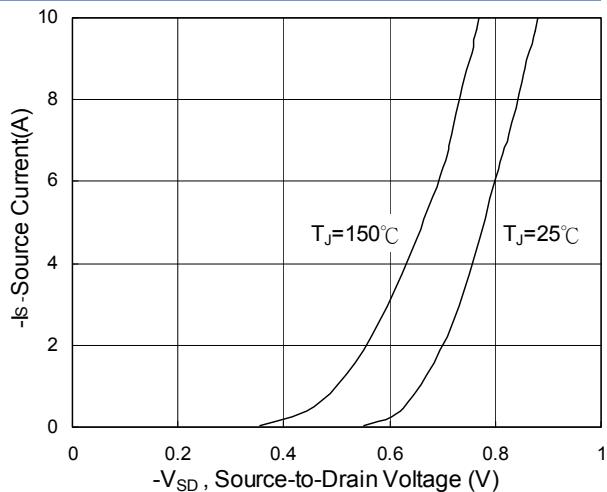
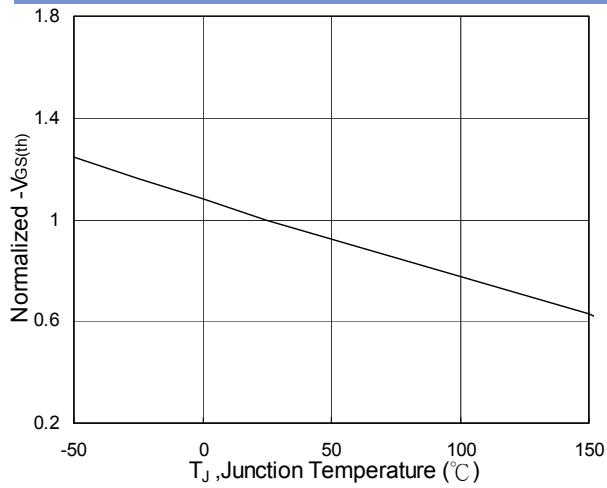
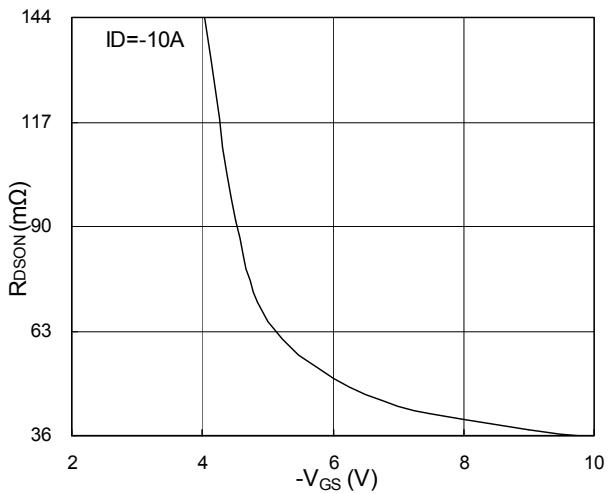
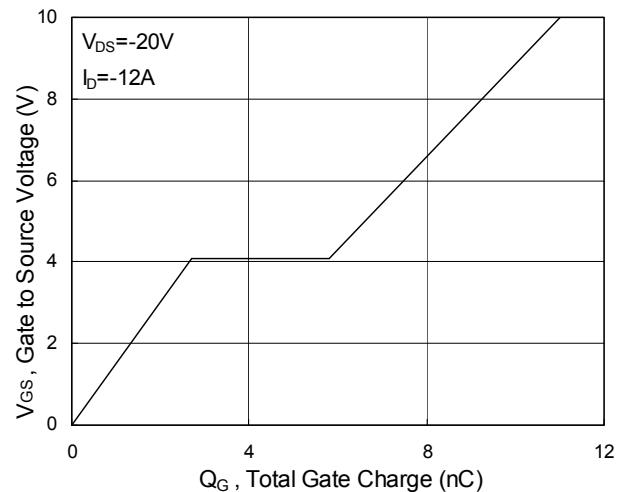
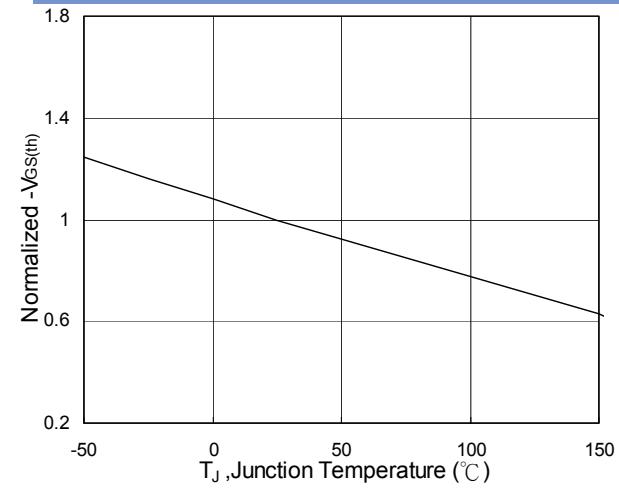
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy ⁵	V _{DD} =-25V , L=0.1mH , I _{AS} =-10A	16	---	---	mJ

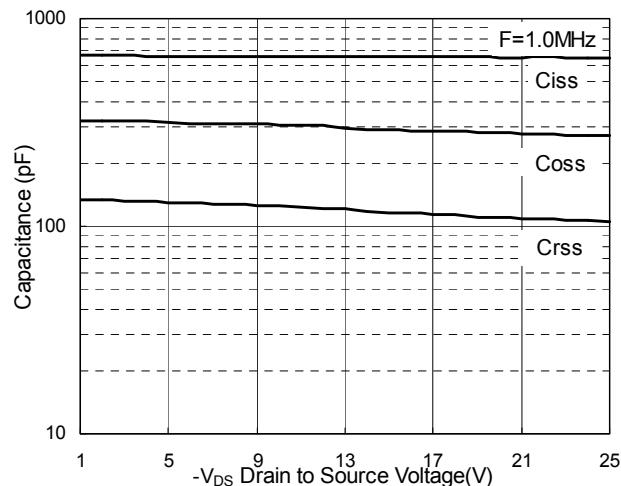
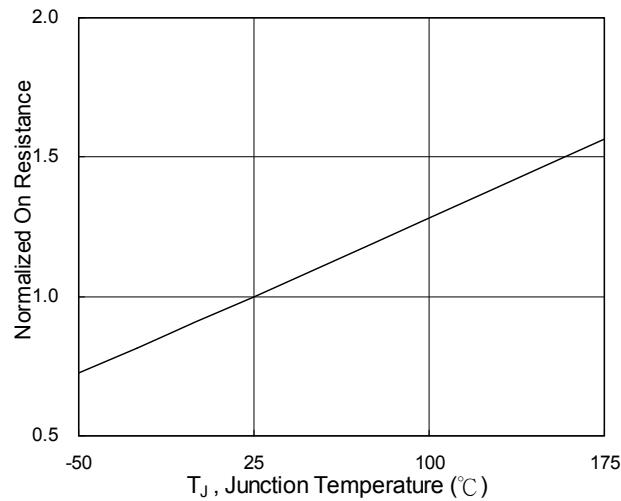
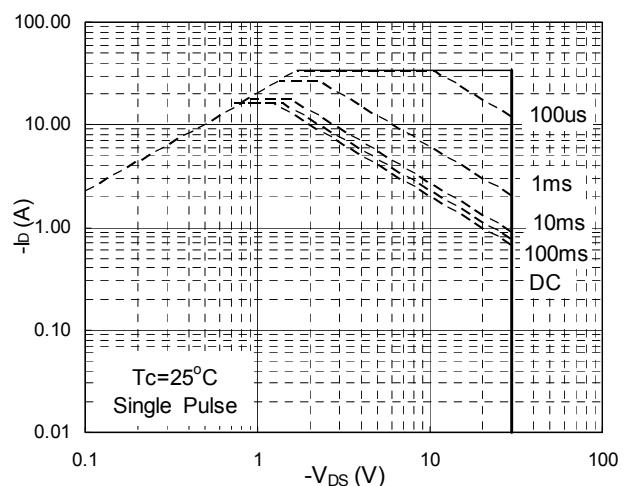
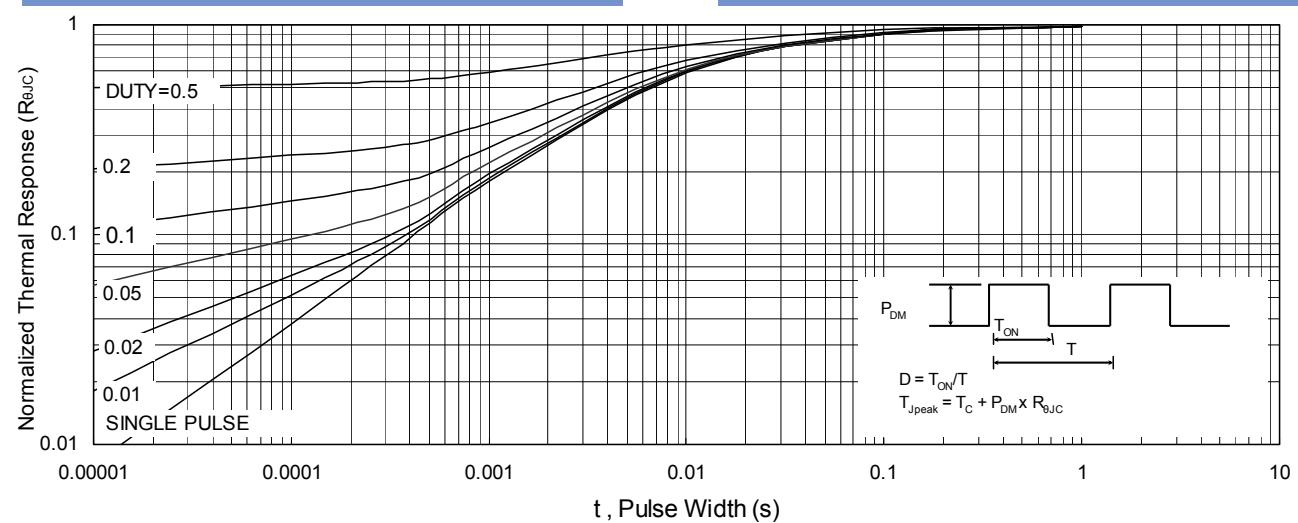
Diode Characteristics

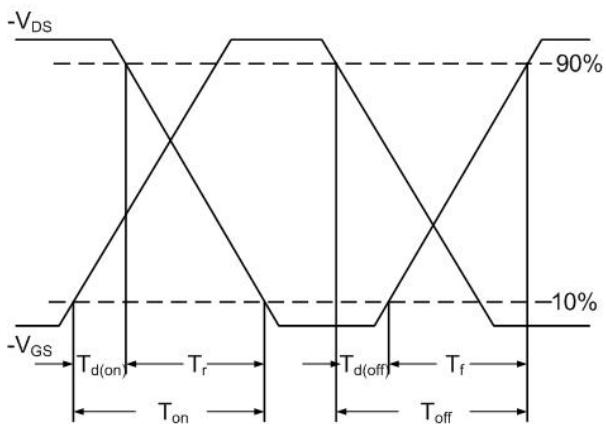
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current ^{1,6}	V _G =V _D =0V , Force Current	---	---	-18	A
I _{SM}	Pulsed Source Current ^{2,6}		---	---	-36	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V , I _S =-10A , T _J =25°C	---	---	-1.2	V

Note :

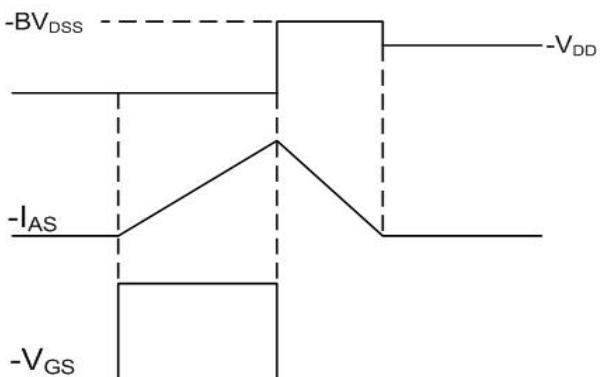
- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3.The EAS data shows Max. rating . The test condition is V_{DD}=-25V,V_{GS}=-10V,L=0.1mH,I_{AS}=-19A
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The Min. value is 100% EAS tested guarantee.
- 6.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

P-Ch 30V Fast Switching MOSFETs
Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.3 Forward Characteristics of reverse

Fig.5 Normalized $V_{GS(th)}$ v.s T_J

Fig.2 On-Resistance v.s Gate-Source

Fig.4 Gate-Charge Characteristics

Fig.6 Normalized $R_{DS(on)}$ v.s T_J

P-Ch 30V Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

P-Ch 30V Fast Switching MOSFETs

Fig.10 Switching Time Waveform

$$EAS = \frac{1}{2} L \times (-I_{AS})^2 \times \frac{-BV_{DSS}}{-BV_{DSS} - (-V_{DD})}$$


Fig.11 Unclamped Inductive Waveform