



7x7.2 Square/Single Turn/Trimming Potentiometer

-- 3362X--

Install dimension



Mutual dimension

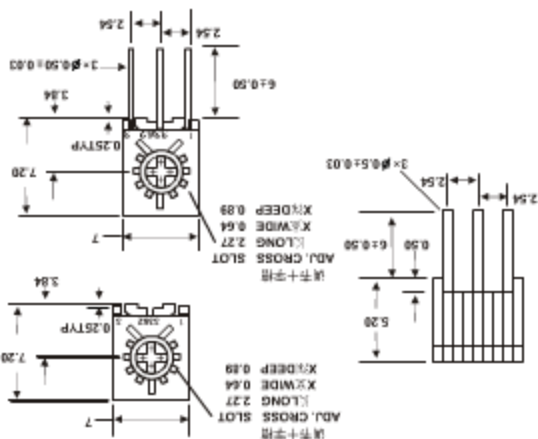


Standard Resistance Table

Resistance Code	Resistance (ohms)	Resistance (ohms)
100	10	10
200	20	20
500	50	50
101	100	100
201	200	200
501	500	500
102	1,000	1,000
202	2,000	2,000
502	5,000	5,000
103	10,000	10,000
203	20,000	20,000
253	25,000	25,000
503	50,000	50,000
104	100,000	100,000
204	200,000	200,000
254	250,000	250,000
504	500,000	500,000
105	1,000,000	1,000,000
205	2,000,000	2,000,000

Special resistances available

How To Order

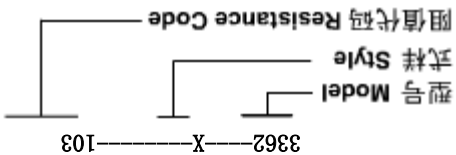

Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ

Resistance Tolerance.....±10%

Absolute Minimum Resistance.....≤1%R或10Ω

Contact Resistance Variation.....CRV≤3%或5Ω

Insulation Resistance.....R1≥1GΩ

Withstand Voltage.....700Vac

Effective Travel.....250°C

Environmental Characteristics

Power Rating, 300 volts max

0.5W@70°C,0W@125°C

Temperature Range.....-55°C~

125°C

Temperature Coefficient.....±250ppm/°C

Temperature Variation.....-55°C,30min,+125°C

30min

5cycles

ΔR≤5%R,Δ(Uab/Uac)≤5%

10~

500Hz,0.75mm,6h

ΔR≤5%R,Δ(Uab/Uac)≤±7.5%R

Collision.....390m/s²,4000cycles ΔR≤5%R

Electrical Endurance at 70°C.....0.5W@70°C

1000h, ΔR≤10%R,R1≥100MΩ

Rotational Life.....200cycles

ΔR≤10%R,CRV≤3% or 5Ω

Physical Characteristics

Starting Torque.....≤