


MATERIALS

| | |
|------------------|-----------------------------------|
| BODY | PASSIVATED STAINLESS STEEL |
| CONTACT | GOLD PLATED |
| INSULATOR | PTFE |
| | |

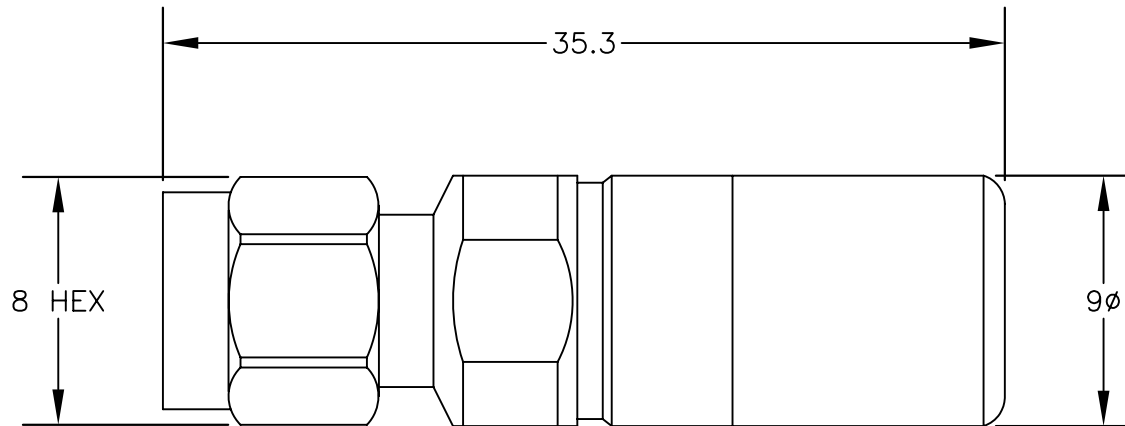

SPECIFICATIONS

FREQUENCY RANGE: DC TO 26.5 GHz

RETURN LOSS:

DC TO 4 GHz = 0.10 dB

4 GHz TO 26.5 = 0.15 dB



PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE5500-3

DES. SHORT CIRCUIT, 3.5mm MALE

| | | | | |
|--------|-----------------------|-----------------|-----------|-----|
| SIZE A | FSCM NO. 53919 | CAD FILE 011007 | SCALE N/A | 147 |
|--------|-----------------------|-----------------|-----------|-----|

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. ALL DIMENSIONS ARE IN mm.