

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014562175

Status:


Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version A, Nonpolarized, Wire Size 28, 0.38µm (15µ") Gold (Au), 17 Circuits

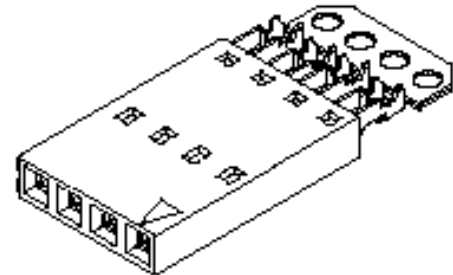

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-70400 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Ribbon Cable / Wire Trap Connectors

Series

70400

Comments

Terminals Preloaded

Component Type

Housing

Glow-Wire Compliant

No

Overview

cgrid_sl_products

Product Name

SL™

Physical

Circuits (Loaded)

17

Color - Resin

Black

Durability (mating cycles max)

50

Entry Angle

Vertical

Flammability

94V-0

Lock to Mating Part

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester Alloy

Number of Rows

1

PCB Retention

None

Packaging Type

Tube

Pitch - Mating Interface (in)

0.100 In

Pitch - Mating Interface (mm)

2.54 mm

Plating min: Mating (µin)

15

Plating min: Mating (µm)

0.375

Plating min: Termination (µin)

75

Plating min: Termination (µm)

1.875

Polarized to Mating Part

No

Stackable

Yes

Surface Mount Compatible (SMC)

N/A

Temperature Range - Operating

-40°C to +105°C

Termination Interface: Style

IDT or Pierce

Wire Insulation Diameter

1.35mm (.053") max.

Wire Size AWG

28

Wire/Cable Type

Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact

3A

Voltage - Maximum

250V

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

70400Series

Mates With

Single Row headers and housings, [8624](#) , [70203](#) , [42375](#) , [42377](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hawk Semi-Automatic Discrete	0011201337

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-70400
SDA-70400-0876-0899

Wire Terminator for
SL - Rebuilt US*
Hawk™ Ribbon 0623003000
Cable Terminator for
SL without Break-off
Hawk™ Semi- 0623004900
Automatic Discrete
Wire Terminator
for SL - Rebuilt CE
Approved*
Hawk™ Flat Flex 0623005200
Cable Terminator for
SL with Break-off
Hawk™ Ribbon 0623005300
Cable Terminator
with for SL Break-off
IDT Discrete 0621000700
Handtool Module for
SL™
Hawk™ Semi- 0623003100
Automatic Discrete
Wire Terminator for
SL

This document was generated on 05/21/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

		E	REVISED PER ECR NO. U82110 10-17-88 AAB
F	LEAD FREE UCP2004-1769 RWHITE 04/03/17	D	REVISE PER ECR #U80110 2/3/88 MJM
EI	ADD CARRIER CHAMF ECN #UDT1998-0280 05/20/98 LMCGRATH	C	REDRAWN ON CAD ECR# 8842 5/8/86 W.Z.
LTR.	REVISIONS	LTR.	REVISIONS