

# SHINDENGEN

## General Purpose Rectifiers

## 3 Phase Bridge Modules

# S20VTA60

## 600V 20A


### FEATURES

- Dual In-Line Package
- Compact 3 phase bridge
- High IFSM
- Applicable to mount on glass-epoxy substrate (VTA type)

### APPLICATION

- Big Power Supply
- Air conditioner
- Factory Automation, Inverter

### OUTLINE DIMENSIONS

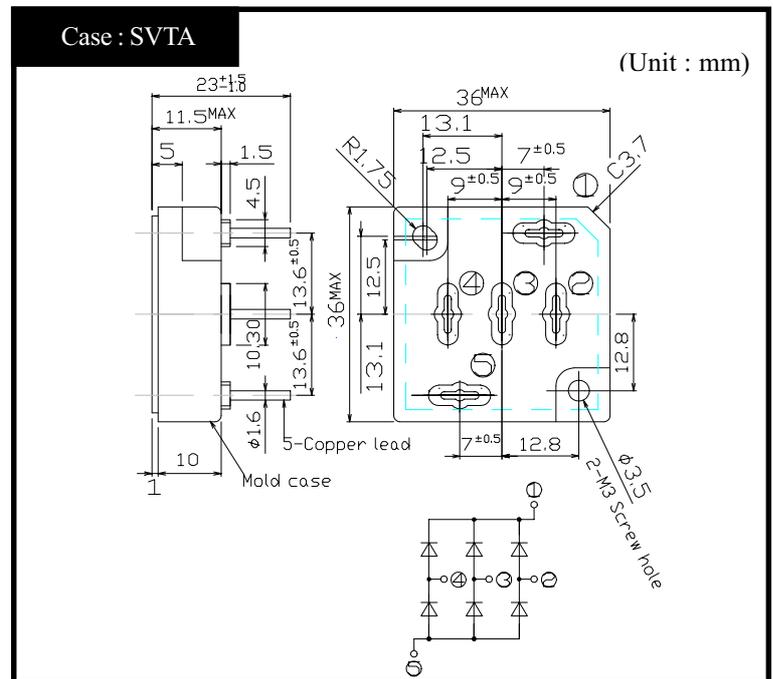

### RATINGS

#### ● Absolute Maximum Ratings (If not specified T<sub>c</sub>=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-40~150	°C
Operating Junction Temperature	T <sub>j</sub>		150	°C
Maximum Reverse Voltage	V <sub>RM</sub>		600	V
Average Rectified Forward Current	I <sub>O</sub>	50Hz sine wave, R-load, With heatsink, T <sub>c</sub> =128°C	20	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1cycle peak value, Rating of per arm, T <sub>j</sub> =25°C	300	A
Current Squared Time	I <sup>2</sup> t	1ms ≤ t < 10ms T <sub>j</sub> =25°C	300	A <sup>2</sup> s
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	( Recommended torque : 0.6N·m)	0.8	N·m

#### ● Electrical Characteristics (If not specified T<sub>c</sub>=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =7A, Pulse measurement, Rating of per arm	Max.1.05	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per arm	Max.10	μA
Thermal Resistance	θ <sub>jc</sub>	junction to case	Max.0.55	°C/W

S20VTA

順方向特性  
Forward Voltage

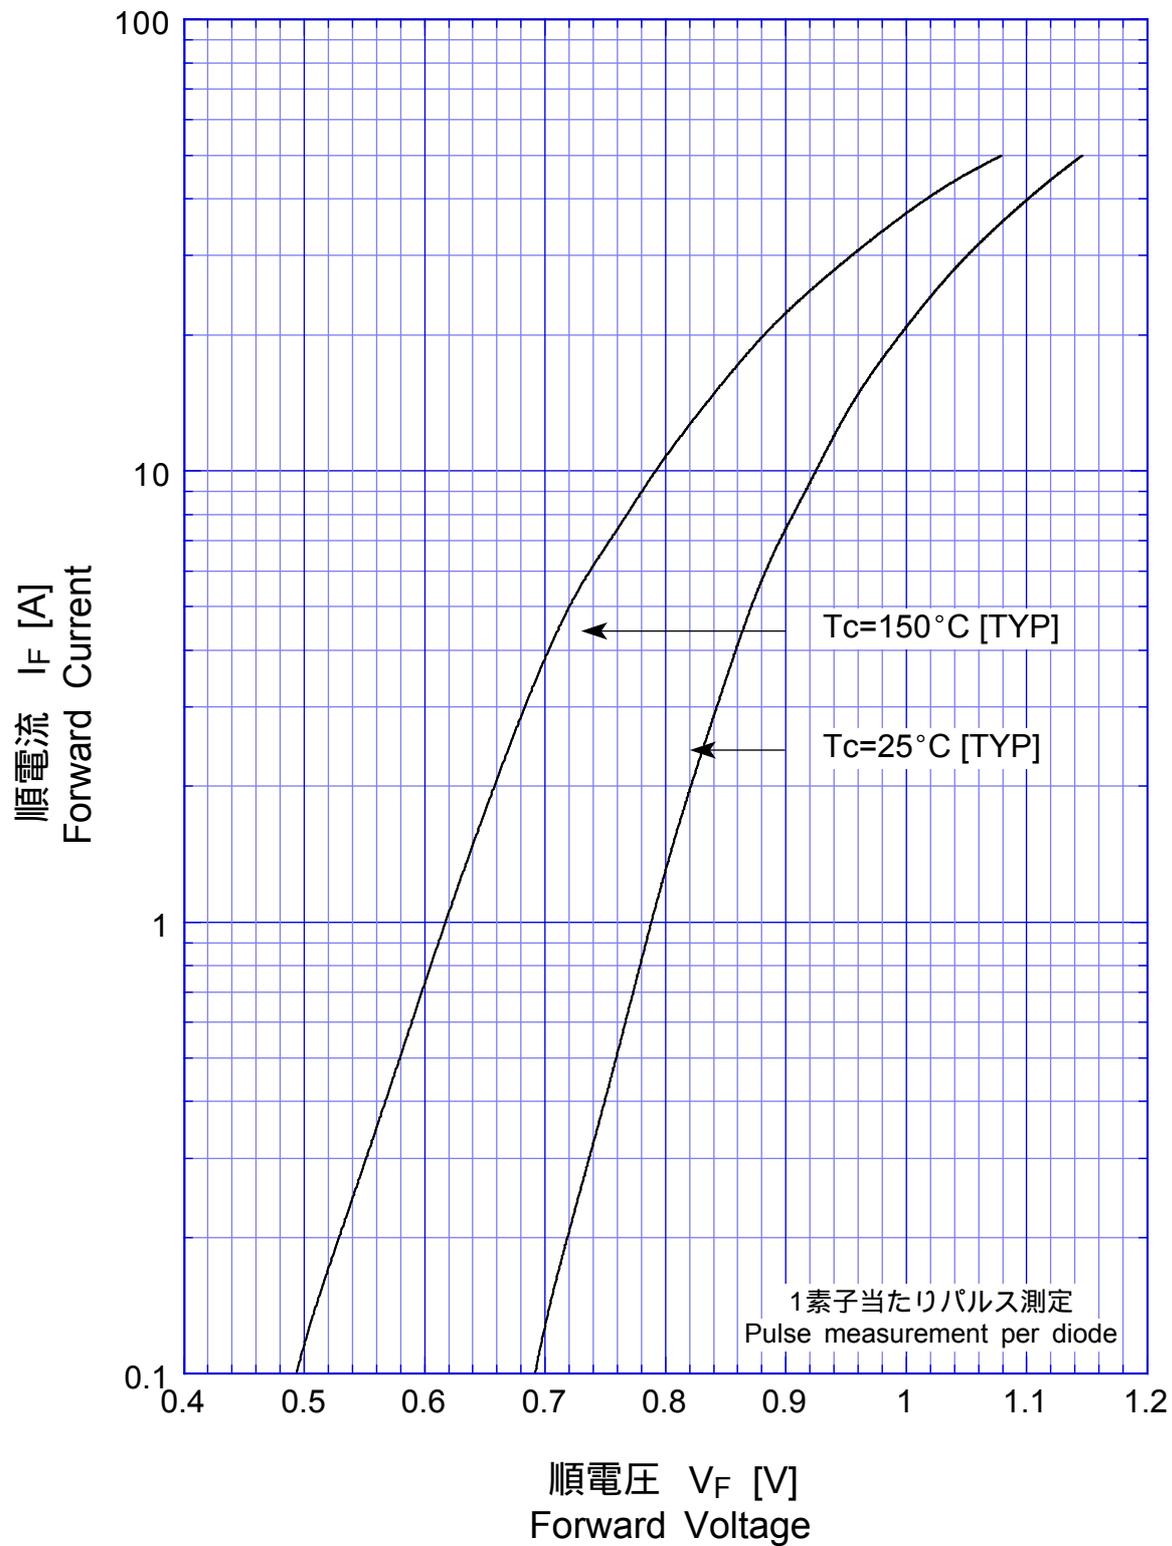


S20VTA 順電力損失曲線  
Forward Power Dissipation

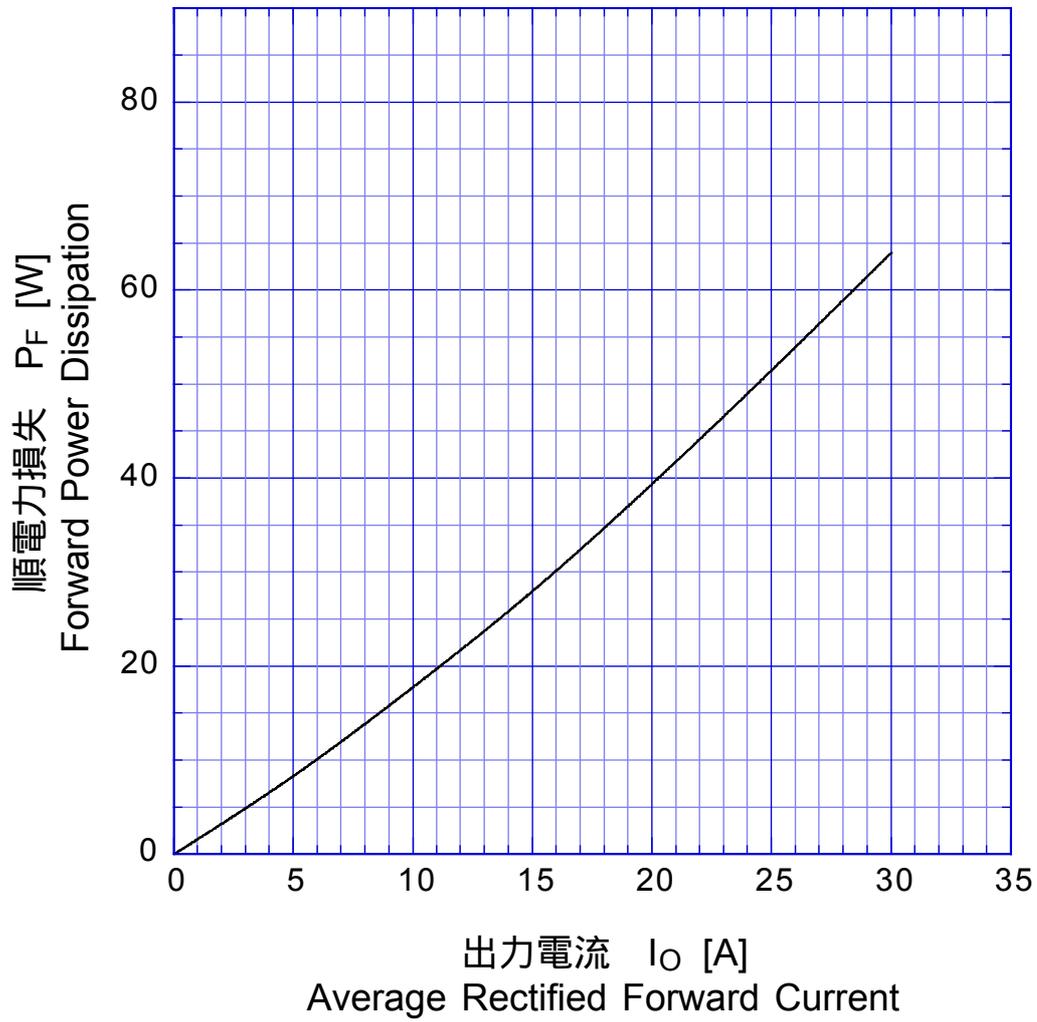


$T_j = 150^\circ\text{C}$   
正弦波 sine wave

# S20VTA せん頭サージ順電流耐量 Peak Surge Forward Capability

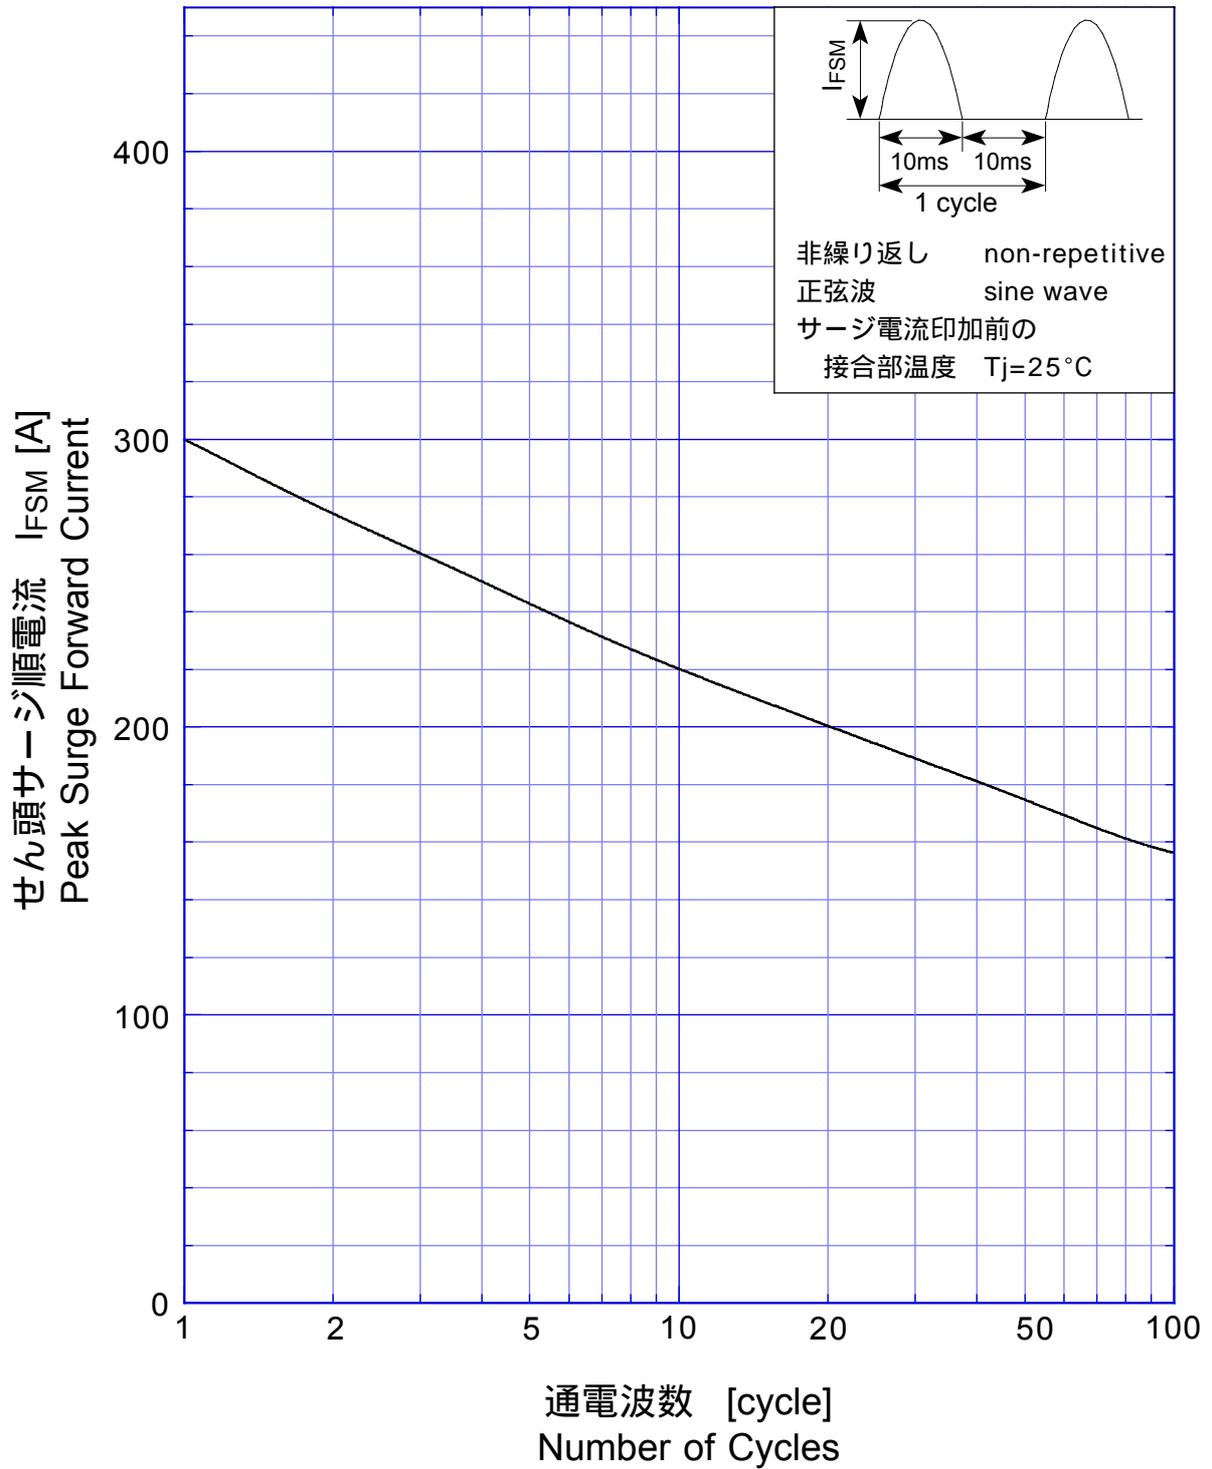

S20VTA

ディレーティングカーブ  
Derating Curve

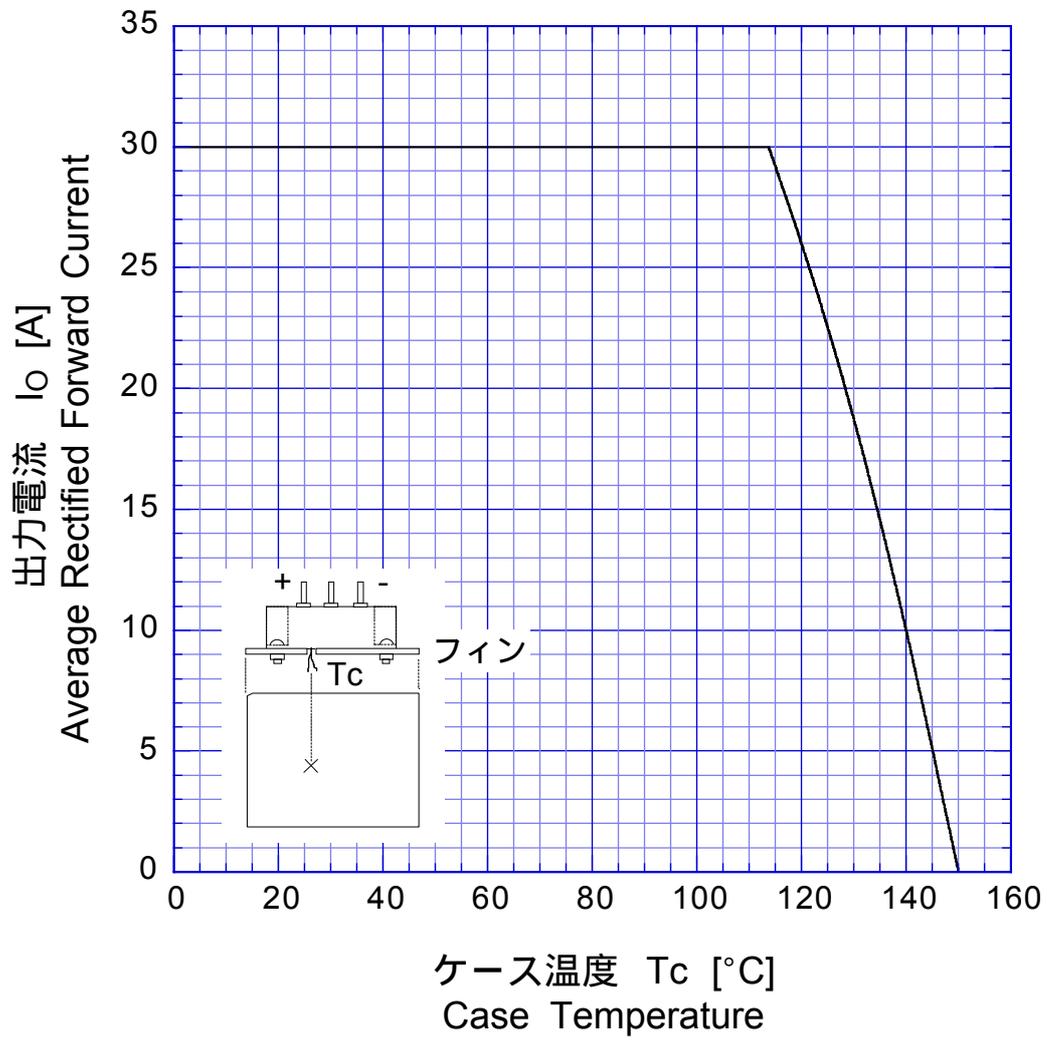

正弦波 sine wave  
抵抗負荷 R-load  
フィン実装 with heatsink