

## BDT64-A-B-C

### SILICON DARLINGTON POWER TRANSISTORS

PNP epitaxial-base transistors in a monolithic Darlington circuit and housed in a TO-220 envelope. They are intended for output stages in audio equipment, general amplifiers, and analogue switching application.

PNP complements are BDT65-A-B-C

Compliance to RoHS.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$V_{CBO}$	Collector-Base Voltage	BDT65	-60	V
		BDT65A	-80	
		BDT65B	-100	
		BDT65C	-120	
$V_{CEO}$	Collector-Emitter Voltage	BDT65	-60	V
		BDT65A	-80	
		BDT65B	-100	
		BDT65C	-120	
$V_{EBO}$	Emitter-Base Voltage	BDT65	-5	V
		BDT65A		
		BDT65B		
		BDT65C		
$I_C$	Collector Current	BDT65	-12	A
		BDT65A		
		BDT65B		
		BDT65C		
$I_{CM}$	Collector Peak Current	BDT65	-20	A
		BDT65A		
		BDT65B		
		BDT65C		

## BDT64-A-B-C

### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$I_B$	Base Current	BDT64	-500	mA
		BDT64A		
		BDT64B		
		BDT64C		
$P_T$	Power Dissipation	@ $T_{mb} < 25^\circ$	125	Watts
		BDT64		
		BDT64A		
		BDT64B		
$T_J$	Junction Temperature	BDT64	150	°C
		BDT64A		
		BDT64B		
		BDT64C		
$T_s$	Storage Temperature range	BDT64	-65 to +150	
		BDT64A		
		BDT64B		
		BDT64C		

Limiting values in accordance with the Absolute Maximum System (IEC 134)

### THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
$R_{thj-c}$	Thermal Resistance, Junction to Case	1	°C/W

## BDT64-A-B-C

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$I_{CBO}$	Collector Cutoff Current	$I_E = 0, V_{CB} = -V_{CB0max}$	BDT64	-	-	-0.4	mA
			BDT64A				
			BDT64B				
			BDT64C				
		$I_E = 0, V_{CB} = -1/2 V_{CB0max}$ $T_J = 150\text{ }^\circ\text{C}$	BDT64	-	-	-2	mA
			BDT64A				
			BDT64B				
			BDT64C				
$I_{CEO}$	Collector Cutoff Current	$I_E = 0, V_{CE} = -1/2 V_{CE0max}$	BDT64	-	-	0.2	mA
			BDT64A				
			BDT64B				
			BDT64C				
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -5\text{ V}, I_C = 0$	BDT64	-	-	-5	mA
			BDT64A				
			BDT64B				
			BDT64C				
$V_{CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -30\text{ mA}, I_B = 0$	BDT64	-60	-	-	V
			BDT64A	-80	-	-	
			BDT64B	-100	-	-	
			BDT64C	-120	-	-	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = -5\text{ A}, I_B = -20\text{ mA}$	BDT64	-	-	-2	V
			BDT64A				
			BDT64B				
			BDT64C				
		$I_C = -10\text{ A}, I_B = -100\text{ mA}$	BDT64	-	-	-3	
			BDT64A				
			BDT64B				
			BDT64C				

## BDT64-A-B-C

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings			Min	Typ	Max	Unit
$V_{BE(on)}$	Base-Emitter Voltage (*)	$I_C = -5\text{ A}, V_{CE} = -4\text{ V}$	BDT64	-	-	-2.5	V
			BDT64A				
			BDT64B				
			BDT64C				
$V_{ECF}$	C-E Diode Forward Voltage	$I_F = -5\text{ A}$	BDT64	-	-	-2	V
			BDT64A				
			BDT64B				
			BDT64C				
		$I_F = -12\text{ A}$	BDT64	-	-2	-	
			BDT64A				
			BDT64B				
			BDT64C				
$h_{FE}$	DC Current Gain (*)	$V_{CE} = -4\text{ V}, I_C = -1\text{ A}$	BDT64	-	1500	-	-
			BDT64A				
			BDT64B				
			BDT64C				
		$V_{CE} = -4\text{ V}, I_C = -5\text{ A}$	BDT64	1000	-	-	
			BDT64A				
			BDT64B				
			BDT64C				
		$V_{CE} = -4\text{ V}, I_C = -12\text{ A}$	BDT64	-	750	-	
			BDT64A				
			BDT64B				
			BDT64C				
$C_{OB}$	Output Capacitance	$I_E = 0, V_{CB} = -10\text{ V}$ $f_{test} = 1\text{ MHz}$	BDT64	-	200	-	pF
			BDT64A				
			BDT64B				
			BDT64C				

### SWITCHING TIMES


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit
$t_{on}$	turn-on time	$I_C = -5\text{ A}, V_{CC} = -30\text{ V}$ $I_{B1} = -I_{B2} = -20\text{ mA}$	-	0.5	2	$\mu\text{s}$
$t_{off}$	turn-off time		-	2.5	5	

(\*) Pulse Width  $\approx 300\ \mu\text{s}$ , Duty Cycle  $\angle 2.0\%$

## BDT64-A-B-C

### MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

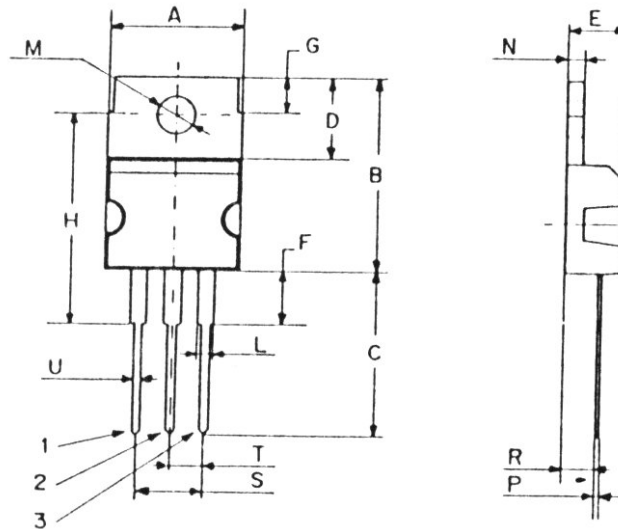

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Package	Collector

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.